

Cottonwood & Edgemont Warehouse

AIR QUALITY IMPACT ANALYSIS
CITY OF MORENO VALLEY

PREPARED BY:

Haseeb Qureshi hqureshi@urbanxroads.com

Alyssa Barnett abarnett@urbanxroads.com

March 15, 2022

TABLE OF CONTENTS

	_	F CONTENTS	
		ICES	
		XHIBITS	
		TABLES	
		ABBREVIATED TERMS	
EX	ECUTI	VE SUMMARY	1
	ES.1	Summary of Findings	1
	ES.2	Regulatory Requirements	1
1	INT	FRODUCTION	5
	1.1	Site Location	5
	1.2	Project Description	
2	AIF	R QUALITY SETTING	9
	2.1	South Coast Air Basin (SCAB)	
	2.2	Regional Climate	
	2.3	Wind Patterns and Project Location	
	2.4	Criteria Pollutants	
	2.5	Existing Air Quality	18
	2.6	Regional Air Quality	21
	2.7	Local Air Quality	21
	2.8	Regulatory Background	22
	2.9	Regional Air Quality Improvement	26
3	PR	OJECT AIR QUALITY IMPACT	38
	3.1	Introduction	38
	3.2	Standards of Significance	38
	3.3	Models Employed To Analyze Air Quality	39
	3.4	Construction Emissions	39
	3.5	Operational Emissions	42
	3.6	Localized Significance	46
	3.7	Construction-Source Emissions LST Analysis	52
	3.8	Operational-Source Emissions LST Analysis	
	3.9	CO "Hot Spot" Analysis	
	3.10	AQMP	
	3.11	Potential Impacts to Sensitive Receptors	
	3.12	Odors	
	3.13	Cumulative Impacts	60
4	REI	FERENCES	63
5	CEI	RTIFICATIONS	67



APPENDICES

APPENDIX 2.1: STATE/FEDERAL ATTAINMENT STATUS OF CRITERIA POLLUTANTS
APPENDIX 3.1: CALEEMOD CONSTRUCTION EMISSIONS MODEL OUTPUTS
APPENDIX 3.2: CALEEMOD GENERAL LIGHT INDUSTRIAL OPERATIONAL EMISSIONS MODEL OUTPUTS
APPENDIX 3.3: CALEEMOD HIGH-CUBE COLD STORAGE OPERATIONAL EMISSIONS MODEL OUTPUTS
APPENDIX 3.4: SCAQMD AMICUS BRIEF
LIST OF EXHIBITS
EXHIBIT 1-A: LOCATION MAP6
EXHIBIT 1-B: SITE PLAN
EXHIBIT 2-A: DPW AND DIESEL VEHICLE WILLES TREND
EXHIBIT 3-A: SENSITIVE RECEPTOR LOCATIONS51
LIST OF TABLES
TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS
TABLE 2-1: CRITERIA POLLUTANTS
TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (1 OF 2)19
TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (2 OF 2)20
TABLE 2-3: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE SCAB21
TABLE 2-4: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2018-202022
TABLE 2-5: SCAB O ₃ TREND28
TABLE 2-6: SCAB AVERAGE 24-HOUR CONCENTRATION PM_{10} TREND (BASED ON FEDERAL STANDARD) ¹
29
TABLE 2-7: SCAB ANNUAL AVERAGE CONCENTRATION PM ₁₀ TREND (BASED ON STATE STANDARD) ¹ 29
TABLE 2-8: SCAB 24-HOUR AVERAGE CONCENTRATION PM _{2.5} TREND (BASED ON FEDERAL STANDARD) ¹
30
TABLE 2-9: SCAB ANNUAL AVERAGE CONCENTRATION PM _{2.5} TREND (BASED ON STATE STANDARD) ¹ .30
TABLE 2-10: SCAB 8-HOUR AVERAGE CONCENTRATION CO TREND ¹
TABLE 2-11: SCAB 1-HOUR AVERAGE CONCENTRATION NO2 TREND (BASED ON FEDERAL STANDARD)33
TABLE 2-12: SCAB 1-HOUR AVERAGE CONCENTRATION NO2 TREND (BASED ON STATE STANDARD)33
TABLE 3-1: MAXIMUM DAILY REGIONAL EMISSIONS THRESHOLDS
TABLE 3-2: CONSTRUCTION TRIP ASSUMPTIONS40
TABLE 3-3: CONSTRUCTION DURATION40
TABLE 3-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS41
TABLE 3-5: OVERALL CONSTRUCTION EMISSIONS SUMMARY42
TABLE 3-6: PASSENGER CAR FLEET MIX44
TABLE 3-7: TRUCK FLEET MIX44
TABLE 3-8: SUMMARY OF PEAK OPERATIONAL EMISSIONS46
TABLE 3-9: MAXIMUM DAILY DISTURBED-ACREAGE48
TABLE 3-10: MAXIMUM DAILY LOCALIZED CONSTRUCTION EMISSIONS THRESHOLDS52
TABLE 3-11: LOCALIZED CONSTRUCTION-SOURCE EMISSIONS52
TABLE 3-12: MAXIMUM DAILY LOCAL IZED OPERATIONAL EMISSIONS THRESHOLDS53
TABLE 3-13: LOCALIZED SIGNIFICANCE SUMMARY OF OPERATIONS



TABLE 3-14: CO MODEL RESULTS	55
TABLE 3-15: TRAFFIC VOLUMES	56



LIST OF ABBREVIATED TERMS

% Percent

°F Degrees Fahrenheit

(1) Reference

μg/m³ Microgram per Cubic Meter

1992 CO Plan 1992 Federal Attainment Plan for Carbon Monoxide

1993 CEQA Handbook SCAQMD's CEQA Air Quality Handbook (1993)

2016-2040 RTP/SCS 2016-2040 Regional Transportation Plan/Sustainable

Communities Strategy

AB 2595 California Clean Air Act
AQIA Air Quality Impact Analysis
AQMP Air Quality Management Plan
BACT Best Available Control Technology

BC Black Carbon

Brief Brief of Amicus Curiae by the SCAQMD in the Friant Ranch

Case

C₂Cl₄ Perchloroethylene C₄H₆ 1,3-butadiene

C₆H₆ Benzene

 C_2H_3Cl Vinyl Chloride C_2H_4O Acetaldehyde

CAA Federal Clean Air Act

CAAQS California Ambient Air Quality Standards
CalEEMod California Emissions Estimator Model

CalEPA California Environmental Protection Agency
CALGreen California Green Building Standards Code

CAP Climate Action Plan

CAPCOA California Air Pollution Control Officers Association

CARB California Air Resources Board
CCR California Code of Regulations
CEC California Energy Commission

CEQA California Environmental Quality Act
CEQA Guidelines 2019 CEQA Statute and Guidelines

CH₂O Formaldehyde

City City of Moreno Valley
CO Carbon Monoxide
COH Coefficient of Haze



COHb Carboxyhemoglobin

Cr(VI) Chromium

CTP Clean Truck Program

DPM Diesel Particulate Matter

DRRP Diesel Risk Reduction Plan

EC Elemental Carbon

EIR Environmental Impact Report EMFAC EMissions FACtor Model

EPA Environmental Protection Agency

ETW Equivalent Test Weight

FAR Floor Area Ratio
GHG Greenhouse Gas

GVWR Gross Vehicle Weight Rating

H₂S Hydrogen Sulfide HDT Heavy Duty Trucks

HHDT Heavy-Heavy-Duty Trucks

HI Hazard Index hp Horsepower lbs Pounds

Ibs/day Pounds Per Day
LDA Light Duty Auto
LDT1/LDT2 Light-Duty Trucks

LHDT1/LHDT2 Light-Heavy-Duty Trucks

LST Localized Significance Threshold

LST Methodology Final Localized Significance Threshold Methodology

MATES Multiple Air Toxics Exposure Study

MCY Motorcycles

MDV Medium-Duty Vehicles

MHDT Medium-Heavy-Duty Trucks
MICR Maximum Individual Cancer Risk

MM Mitigation Measures

mph Miles Per Hour

MWELO California Department of Water Resources' Model Water

Efficient

N₂ Nitrogen

N₂O Nitrous Oxide

NAAQS National Ambient Air Quality Standards

NO Nitric Oxide



NO₂ Nitrogen Dioxide NO_X Nitrogen Oxides

 O_2 Oxygen O_3 Ozone

O₂ Deficiency Chronic Hypoxemia
OBD-II On-Board Diagnostic

ODC Ozone Depleting Compounds

Pb Lead

PM₁₀ Particulate Matter 10 microns in diameter or less PM_{2.5} Particulate Matter 2.5 microns in diameter or less

POLA Port of Los Angeles
POLB Port of Long Beach
ppm Parts Per Million

Project Cottonwood & Edgemont Warehouse
RECLAIM Regional Clean Air Incentives Market
RFG-2 Reformulated Gasoline Regulation

ROG Reactive Organic Gases
SCAB South Coast Air Basin

SCAG Southern California Association of Governments
SCAQMD South Coast Air Quality Management District

sf Square Feet

SIPs State Implementation Plans

SO₂ Sulfur Dioxide

SO₄ Sulfates

SO_X Sulfur Oxides

SoCalGas The Southern California Gas Company

SR-60 State Route 60

SRA Source Receptor Area
TAC Toxic Air Contaminant
Title 24 California Building Code
TITLE I Non-Attainment Provisions
TITLE II Mobile Sources Provisions

UFP Ultrafine Particles
URBEMIS URBan EMISsions

VMT Vehicle Miles Traveled

VOC Volatile Organic Compounds

vph Vehicles Per Hour



This page intentionally left blank



EXECUTIVE SUMMARY

ES.1 SUMMARY OF FINDINGS

The results of this *Cottonwood & Edgemont Warehouse Air Quality Impact Analysis* (AQIA) are summarized below based on the significance criteria in Section 3 of this report consistent with Appendix G of the *California Environmental Quality Act (CEQA) Guidelines (CEQA Guidelines)* (1). Table ES-1 shows the findings of significance for each potential air quality impact under CEQA before and after any required mitigation measures (MM) described below.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Analysis	Report	Significan	ce Findings	
Allalysis	Section	Unmitigated	Mitigated	
Regional Construction Emissions	3.4	Less Than Significant	n/a	
Localized Construction Emissions	3.7	Less Than Significant	n/a	
Regional Operational Emissions	3.5	Less Than Significant	n/a	
Localized Operational Emissions	3.8	Less Than Significant	n/a	
CO "Hot Spot" Analysis	3.9	Less Than Significant	n/a	
Air Quality Management Plan	3.10	Less Than Significant	n/a	
Sensitive Receptors	3.11	Less Than Significant	n/a	
Odors	3.12	Less Than Significant	n/a	
Cumulative Impacts	3.13	Less Than Significant	n/a	

ES.2 REGULATORY REQUIREMENTS

There are numerous requirements that development projects must comply with by law, and that were put in place by federal, State, and local regulatory agencies for the improvement of air quality.

Any operation or activity that might cause the emission of any smoke, fly ash, dust, fumes, vapors, gases, or other forms of air pollution, which can cause damage to human health, vegetation, or



other forms of property, or can cause excessive soiling on any other parcel shall conform to the requirements of the SCAQMD.

SCAQMD RULES

South Coast Air Quality Management District (SCAQMD) Rules that are currently applicable during construction activity for this Project are described below.

SCAQMD RULE 401

A person shall not discharge into the atmosphere from any single source of emission whatsoever any air contaminant for a period or periods aggregating more than three minutes in any 1 hour that is as dark or darker in shade as that designated No. 1 on the Ringelmann Chart, as published by the U.S. Bureau of Mines.

SCAQMD RULE 402

A person shall not discharge from any source whatsoever such quantities of air contaminants or other material that cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or that endanger the comfort, repose, health, or safety of any such persons or the public, or that cause, or have a natural tendency to cause, injury or damage to business or property. The provisions of this rule do not apply to odors emanating from agricultural operations necessary for the growing of crops or the raising of fowl or animals.

Odor Emissions. All uses shall be operated in a manner such that no offensive odor is perceptible at or beyond the property line of that use.

SCAQMD RULE 403

This rule is intended to reduce the amount of particulate matter entrained in the ambient air as a result of anthropogenic (human-made) fugitive dust sources by requiring actions to prevent and reduce fugitive dust emissions. Rule 403 applies to any activity or human-made condition capable of generating fugitive dust and requires best available control measures to be applied to earth moving and grading activities.

Dust Control, Operations. Any operation or activity that might cause the emission of any smoke, fly ash, dust, fumes, vapors, gases, or other forms of air pollution, which can cause damage to human health, vegetation, or other forms of property, or can cause excessive soiling on any other parcel, shall conform to the requirements of the SCAQMD.

SCAQMD RULE 1113

This rule serves to limit the Volatile Organic Compound (VOC) content of architectural coatings used on projects in the SCAQMD. Any person who supplies, sells, offers for sale, or manufactures any architectural coating for use on projects.

SCAQMD RULE 1301

This rule is intended to provide that pre-construction review requirements to ensure that new or relocated facilities do not interfere with progress in attainment of the National Ambient Air



Quality Standards (NAAQS), while future economic growth within the SCAQMD is not unnecessarily restricted. The specific air quality goal is to achieve no net increases from new or modified permitted sources of nonattainment air contaminants or their precursors. Rule 1301 also limits emission increases of ammonia, and Ozone Depleting Compounds (ODCs) from new, modified or relocated facilities by requiring the use of Best Available Control Technology (BACT).

Although the Project would comply with the above regulatory requirements, it should be noted that emission reductions associated with Rules 401, 402, and 1301 cannot be quantified in the California Emissions Estimator Model (CalEEMod) and are therefore not reflected in the emissions presented herein. Conversely, Rule 403 (Fugitive Dust) (2) and Rule 1113 (Architectural Coatings) (3) can be modeled in CalEEMod. As such, credit for Rule 403 and Rule 1113 have been taken in the analysis.



This page intentionally left blank



1 INTRODUCTION

This report presents the results of the AQIA prepared by Urban Crossroads, Inc., for the proposed Cottonwood & Edgemont Warehouse (Project). The purpose of this AQIA is to evaluate the potential impacts to air quality associated with construction and operation of the Project and recommend measures to mitigate impacts considered potentially significant in comparison to thresholds established by the SCAQMD.

1.1 SITE LOCATION

The proposed project is located south of Cottonwood Avenue between Old 215 Frontage Road and Edgemont Street in the City of Moreno Valley as shown on Exhibit 1-A.

1.2 PROJECT DESCRIPTION

The Project is proposed to consist of two 49,815 square foot (sf) warehouse buildings for a total of 99,630 sf as shown on Exhibit 1-B.



EXHIBIT 1-A: LOCATION MAP


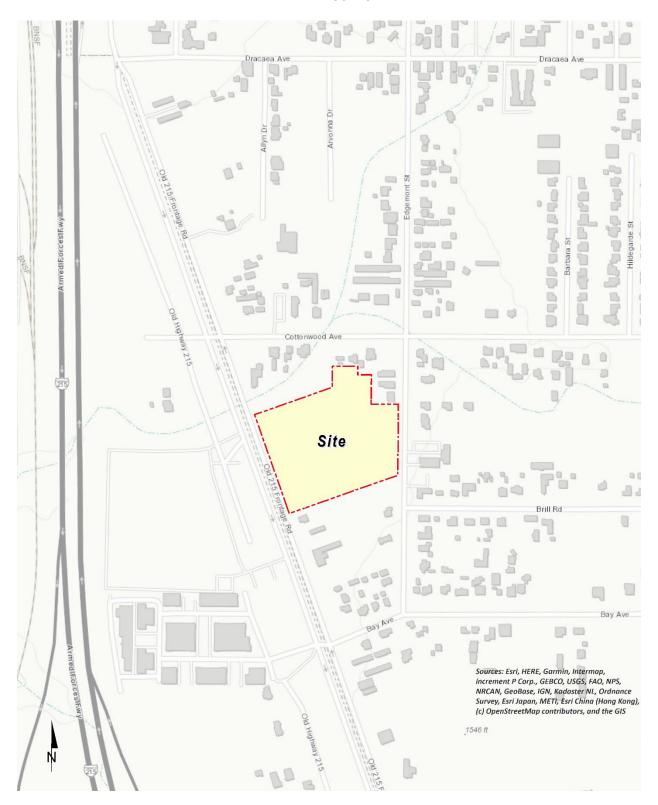




EXHIBIT 1-B: SITE PLAN



This page intentionally left blank

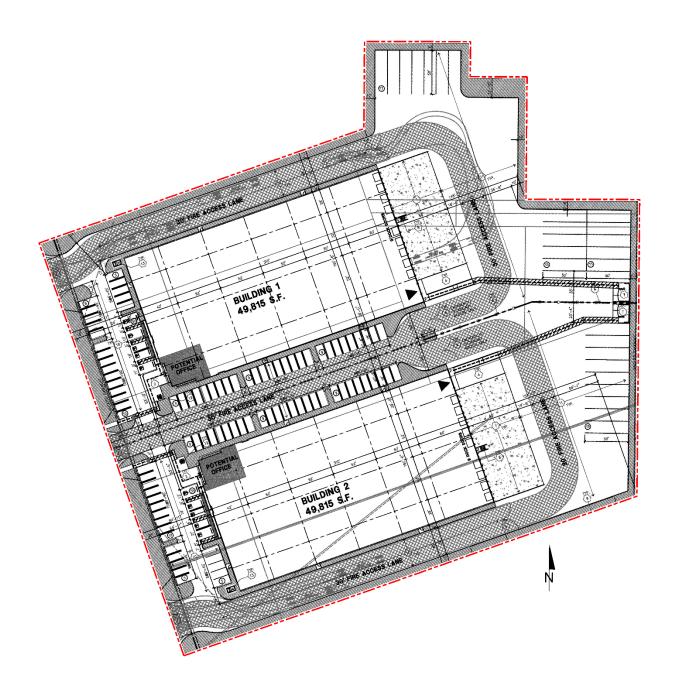

2 AIR QUALITY SETTING

This section provides an overview of the existing air quality conditions in the Project area and region.

2.1 SOUTH COAST AIR BASIN (SCAB)

The Project site is located in the SCAB within the jurisdiction of SCAQMD (4). The SCAQMD was created by the 1977 Lewis-Presley Air Quality Management Act, which merged four county air pollution control bodies into one regional district. Under the Act, the SCAQMD is responsible for bringing air quality in areas under its jurisdiction into conformity with federal and state air quality standards. As previously stated, the Project site is located within the SCAB, a 6,745-square mile subregion of the SCAQMD, which includes portions of Los Angeles, Riverside, and San Bernardino Counties, and all of Orange County.

The SCAB is bounded by the Pacific Ocean to the west and the San Gabriel, San Bernardino, and San Jacinto Mountains to the north and east. The Los Angeles County portion of the Mojave Desert Air Basin is bounded by the San Gabriel Mountains to the south and west, the Los Angeles / Kern County border to the north, and the Los Angeles / San Bernardino County border to the east. The Riverside County portion of the Salton Sea Air Basin is bounded by the San Jacinto Mountains in the west and spans eastward up to the Palo Verde Valley.

2.2 REGIONAL CLIMATE

The regional climate has a substantial influence on air quality in the SCAB. In addition, the temperature, wind, humidity, precipitation, and amount of sunshine influence the air quality.

The annual average temperatures throughout the SCAB vary from the low to middle 60s degrees Fahrenheit (°F). Due to a decreased marine influence, the eastern portion of the SCAB shows greater variability in average annual minimum and maximum temperatures. January is the coldest month throughout the SCAB, with average minimum temperatures of 47°F in downtown Los Angeles and 36°F in San Bernardino. All portions of the SCAB have recorded maximum temperatures above 100°F.

Although the climate of the SCAB can be characterized as semi-arid, the air near the land surface is quite moist on most days because of the presence of a marine layer. This shallow layer of sea air is an important modifier of SCAB climate. Humidity restricts visibility in the SCAB, and the conversion of sulfur dioxide (SO₂) to sulfates (SO₄) is heightened in air with high relative humidity. The marine layer provides an environment for that conversion process, especially during the spring and summer months. The annual average relative humidity within the SCAB is 71% along the coast and 59% inland. Since the ocean effect is dominant, periods of heavy early morning fog are frequent and low stratus clouds are a characteristic feature. These effects decrease with distance from the coast.

More than 90% of the SCAB's rainfall occurs from November through April. The annual average rainfall varies from approximately nine inches in Riverside to fourteen inches in downtown Los



Angeles. Monthly and yearly rainfall totals are extremely variable. Summer rainfall usually consists of widely scattered thunderstorms near the coast and slightly heavier shower activity in the eastern portion of the SCAB with frequency being higher near the coast.

Due to its generally clear weather, about three-quarters of available sunshine is received in the SCAB. The remaining one-quarter is absorbed by clouds. The ultraviolet portion of this abundant radiation is a key factor in photochemical reactions. On the shortest day of the year there are approximately 10 hours of possible sunshine, and on the longest day of the year there are approximately 14½ hours of possible sunshine.

The importance of wind to air pollution is considerable. The direction and speed of the wind determines the horizontal dispersion and transport of the air pollutants. During the late autumn to early spring rainy season, the SCAB is subjected to wind flows associated with the traveling storms moving through the region from the northwest. This period also brings five to ten periods of strong, dry offshore winds, locally termed "Santa Anas" each year. During the dry season, which coincides with the months of maximum photochemical smog concentrations, the wind flow is bimodal, typified by a daytime onshore sea breeze and a nighttime offshore drainage wind. Summer wind flows are created by the pressure differences between the relatively cold ocean and the unevenly heated and cooled land surfaces that modify the general northwesterly wind circulation over southern California. Nighttime drainage begins with the radiational cooling of the mountain slopes. Heavy, cool air descends the slopes and flows through the mountain passes and canyons as it follows the lowering terrain toward the ocean. Another characteristic wind regime in the SCAB is the "Catalina Eddy," a low level cyclonic (counterclockwise) flow centered over Santa Catalina Island which results in an offshore flow to the southwest. On most spring and summer days, some indication of an eddy is apparent in coastal sections.

In the SCAB, there are two distinct temperature inversion structures that control vertical mixing of air pollution. During the summer, warm high-pressure descending (subsiding) air is undercut by a shallow layer of cool marine air. The boundary between these two layers of air is a persistent marine subsidence/inversion. This boundary prevents vertical mixing which effectively acts as an impervious lid to pollutants over the entire SCAB. The mixing height for the inversion structure is normally situated 1,000 to 1,500 feet above mean sea level.

A second inversion-type forms in conjunction with the drainage of cool air off the surrounding mountains at night followed by the seaward drift of this pool of cool air. The top of this layer forms a sharp boundary with the warmer air aloft and creates nocturnal radiation inversions. These inversions occur primarily in the winter when nights are longer and onshore flow is weakest. They are typically only a few hundred feet above mean sea level. These inversions effectively trap pollutants, such as nitrogen oxides (NO_X) and CO from vehicles, as the pool of cool air drifts seaward. Winter is therefore a period of high levels of primary pollutants along the coastline.

2.3 WIND PATTERNS AND PROJECT LOCATION

The distinctive climate of the Project area and the SCAB is determined by its terrain and geographical location. The SCAB is located in a coastal plain with connecting broad valleys and



low hills, bounded by the Pacific Ocean in the southwest quadrant with high mountains forming the remainder of the perimeter.

Wind patterns across the south coastal region are characterized by westerly and southwesterly onshore winds during the day and easterly or northeasterly breezes at night. Winds are characteristically light although the speed is somewhat greater during the dry summer months than during the rainy winter season.

2.4 CRITERIA POLLUTANTS

Criteria pollutants are pollutants that are regulated through the development of human health based and/or environmentally based criteria for setting permissible levels. Criteria pollutants, their typical sources, and health effects are identified below (5):

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
СО	CO is a colorless, odorless gas produced by the incomplete combustion of carbon-containing fuels, such as gasoline or wood. CO concentrations tend to be the highest during the winter morning, when little to no wind and surface-based inversions trap the pollutant at ground levels. Because CO is emitted directly from internal combustion engines, unlike ozone (O ₃), motor vehicles operating at slow speeds are the primary source of CO in the SCAB. The highest ambient CO concentrations are generally found near congested transportation corridors and intersections.	Any source that burns fuel such as automobiles, trucks, heavy construction equipment, farming equipment and residential heating.	Individuals with a deficient blood supply to the heart are the most susceptible to the adverse effects of CO exposure. The effects observed include earlier onset of chest pain with exercise, and electrocardiograph changes indicative of decreased oxygen (O ₂) supply to the heart. Inhaled CO has no direct toxic effect on the lungs but exerts its effect on tissues by interfering with O ₂ transport and competing with O ₂ to combine with hemoglobin present in the blood to form carboxyhemoglobin (COHb). Hence, conditions with an increased demand for O ₂ supply can be adversely affected by exposure to CO. Individuals most at risk include fetuses, patients with diseases involving heart and blood vessels, and patients with chronic hypoxemia (O ₂ deficiency) as seen at high altitudes.



Cuitania Dallutant	Description	Carreage	Haalah Effasta
Criteria Pollutant	Description	Sources	Health Effects
SO ₂	SO ₂ is a colorless, extremely irritating gas or liquid. It enters the atmosphere as a pollutant mainly as a result of burning high sulfur-content fuel oils and coal and from chemical processes occurring at chemical plants and refineries. When SO ₂ oxidizes in the atmosphere, it forms SO ₄ . Collectively, these pollutants are referred to as sulfur oxides (SO _x).	Coal or oil burning power plants and industries, refineries, diesel engines	Health Effects A few minutes of exposure to low levels of SO ₂ can result in airway constriction in some asthmatics, all of whom are sensitive to its effects. In asthmatics, increase in resistance to air flow, as well as reduction in breathing capacity leading to severe breathing difficulties, are observed after acute exposure to SO ₂ . In contrast, healthy individuals do not exhibit similar acute responses even after exposure to higher concentrations of SO ₂ . Animal studies suggest that despite SO ₂ being a respiratory irritant, it does not cause substantial lung injury at ambient concentrations. However, very high levels of exposure can cause lung edema (fluid accumulation), lung tissue damage, and sloughing off of cells lining the respiratory tract. Some population-based studies indicate that the mortality and morbidity effects associated with fine particles show a similar association with ambient SO ₂ levels. In these studies, efforts to separate the effects of SO ₂ from those of fine particles have not been successful. It is not clear whether the two pollutants act synergistically, or one pollutant alone is the predominant factor.
I			



Criteria Pollutant	Description	Sources	Health Effects
NOx	NO _x consist of nitric oxide (NO), nitrogen dioxide (NO ₂) and nitrous oxide (N ₂ O) and are formed when nitrogen (N ₂) combines with O ₂ . Their lifespan in the atmosphere ranges from one to seven days for nitric oxide and nitrogen dioxide, to 170 years for nitrous oxide. NO _x is typically created during combustion processes and are major contributors to smog formation and acid deposition. NO ₂ is a criteria air pollutant and may result in numerous adverse health effects; it absorbs blue light, resulting in a brownish-red cast to the atmosphere and reduced visibility. Of the seven types of NO _x compounds, NO ₂ is the most abundant in the atmosphere. As ambient concentrations of NO ₂ are related to traffic density, commuters in heavy traffic may be exposed to higher concentrations of NO ₂ than those indicated by regional monitoring station.	Any source that burns fuel such as automobiles, trucks, heavy construction equipment, farming equipment and residential heating.	Population-based studies suggest that an increase in acute respiratory illness, including infections and respiratory symptoms in children (not infants), is associated with long-term exposure to NO2 at levels found in homes with gas stoves, which are higher than ambient levels found in Southern California. Increase in resistance to air flow and airway contraction is observed after short-term exposure to NO2 in healthy subjects. Larger decreases in lung functions are observed in individuals with asthma or chronic obstructive pulmonary disease (e.g., chronic bronchitis, emphysema) than in healthy individuals, indicating a greater susceptibility of these sub-groups. In animals, exposure to levels of NO2 considerably higher than ambient concentrations result in increased susceptibility to infections, possibly due to the observed changes in cells involved in maintaining immune functions. The severity of lung tissue damage associated with high levels of O3 exposure increases when animals are exposed to a combination of O3 and NO2.
Оз	O ₃ is a highly reactive and unstable gas that is formed when VOCs and NOx, both byproducts of internal combustion engine exhaust, undergo slow photochemical reactions in the presence of sunlight. O ₃ concentrations are generally highest during the summer	Formed when reactive organic gases (ROG) and NO _X react in the presence of sunlight. ROG sources include any source	Individuals exercising outdoors, children, and people with preexisting lung disease, such as asthma and chronic pulmonary lung disease, are considered to be the most susceptible subgroups for O ₃ effects. Shortterm exposure (lasting for a



months when direct sunlight, light wind, and warm temperature conditions are favorable to the formation of this pollutant. The pollutant is	an result changes, ng tions, ung
light wind, and warm temperature conditions are favorable to the formation of this pollutant. (e.g., gasoline, natural gas, wood, oil) solvents, petroleum processing and storage and pesticides. (e.g., gasoline, natural gas, wood, oil) solvents, petroleum processing and storage and pesticides. (e.g., gasoline, natural gas, wood, oil) solvents, petroleum processing and susceptibility to infect inflammation of the litissue, and some immunological chang Elevated O ₃ levels are associated with incressed	changes, ig ctions, ung
favorable to the formation of this pollutant. oil) solvents, petroleum reduction of breathing processing and storage and pesticides. in breathing pattern or reduction of breathing capacity, increased susceptibility to infect inflammation of the litissue, and some immunological change Elevated O ₃ levels are associated with increased.	changes, ig ctions, ung
pollutant. petroleum reduction of breathin capacity, increased storage and pesticides. pesticides. petroleum reduction of breathin capacity, increased susceptibility to infect inflammation of the litissue, and some immunological change Elevated O ₃ levels are associated with increased.	etions, ung
processing and susceptibility to infect pesticides. pesticides. inflammation of the litissue, and some immunological chang Elevated O ₃ levels are associated with incressed.	tions, ung
storage and susceptibility to infect inflammation of the litissue, and some immunological chang Elevated O ₃ levels are associated with incre-	ung
pesticides. inflammation of the letissue, and some immunological chang Elevated O ₃ levels are associated with incressions.	ung
tissue, and some immunological chang Elevated O ₃ levels are associated with incre	J
immunological chang Elevated O₃ levels are associated with incre	
Elevated O₃ levels are associated with incre	
associated with incre	es.
	ب
	ased
school absences. In re	
years, a correlation b	
elevated ambient O ₃	
and increases in daily	•
admission rates, as w	
mortality, has also be	
reported. An increase	
for asthma has been	
children who particip	
multiple outdoor spo	
reside in communitie	s with
high O₃ levels.	
O₃ exposure under ex	cercising
conditions is known t	.0
increase the severity	of the
responses described a	above.
Animal studies sugge	st that
exposure to a combin	nation of
pollutants that includ	
may be more toxic th	
exposure to O₃ alone.	
Although lung volume	
resistance changes of	
after a single exposur	
diminish with repeate	
exposures, biochemic	
cellular changes appe	
persist, which can lea	
subsequent lung stru	ctural
changes.	
Particulate Matter PM ₁₀ : A major air pollutant Sources of PM ₁₀ A consistent correlati	ion —
consisting of tiny solid or liquid include road dust, between elevated am	_
particles of soot, dust, smoke, windblown dust and fine particulate matter	
fumes, and aerosols. Particulate construction. Also and PM _{2.5}) levels and	•
matter pollution is a major cause formed from other increase in mortality	
of reduce visibility (haze) which is pollutants (acid respiratory infections	
caused by the scattering of light rain, NOx, SOx, number and severity	



Criteria Pollutant	Description	Sources	Health Effects
Criteria Poliutant	and consequently the significant reduction air clarity. The size of the particles (10 microns or smaller, about 0.0004 inches or less) allows them to easily enter the lungs where they may be deposited, resulting in adverse health effects. Additionally, it should be noted that PM ₁₀ is considered a criteria air pollutant. PM _{2.5} : A similar air pollutant to PM ₁₀ consisting of tiny solid or liquid particles which are 2.5 microns or smaller (which is often referred to as fine particles). These particles are formed in the atmosphere from primary gaseous emissions that include SO ₄ formed from SO ₂ release from power plants and industrial facilities and nitrates that are formed from NO _x release from power plants, automobiles, and other types of combustion sources. The chemical composition of fine particles highly depends on location, time of year, and weather conditions. PM _{2.5} is a criteria air pollutant.	organics). Incomplete combustion of any fuel. PM2.5 comes from fuel combustion in motor vehicles, equipment, and industrial sources, residential and agricultural burning. Also formed from reaction of other pollutants (acid rain, NOx, SOx, organics).	asthma attacks and the number of hospital admissions has been observed in different parts of the United States and various areas around the world. In recent years, some studies have reported an association between long-term exposure to air pollution dominated by fine particles and increased mortality, reduction in lifespan, and an increased mortality from lung cancer. Daily fluctuations in PM2.5 concentration levels have also been related to hospital admissions for acute respiratory conditions in children, to school and kindergarten absences, to a decrease in respiratory lung volumes in normal children, and to increased medication use in children and adults with asthma. Recent studies show lung function growth in children is reduced with long term exposure to particulate matter. The elderly, people with preexisting respiratory or cardiovascular disease, and children appear to be more susceptible to the effects of high levels of PM10 and PM2.5.
VOC	VOCs are hydrocarbon compounds (any compound containing various combinations of hydrogen and carbon atoms) that exist in the ambient air. VOCs contribute to the formation of smog through atmospheric photochemical reactions and/or may be toxic. Compounds of carbon (also known as organic compounds) have different levels of reactivity; that is, they do not react at the same speed or do not	Organic chemicals are widely used as ingredients in household products. Paints, varnishes, and wax all contain organic solvents, as do many cleaning, disinfecting, cosmetic, degreasing and hobby products.	Breathing VOCs can irritate the eyes, nose, and throat, can cause difficulty breathing and nausea, and can damage the central nervous system as well as other organs. Some VOCs can cause cancer. Not all VOCs have all these health effects, though many have several.



Criteria Pollutant	Description	Sources	Health Effects
	form O ₃ to the same extent when exposed to photochemical processes. VOCs often have an odor, and some examples include gasoline, alcohol, and the solvents used in paints. Exceptions to the VOC designation include CO, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate. VOCs are a criteria pollutant since they are a precursor to O ₃ , which is a criteria pollutant. The terms VOC and ROG (see below) interchangeably.	Fuels are made up of organic chemicals. All of these products can release organic compounds while you are using them, and, to some degree, when they are stored.	
ROG	Similar to VOC, ROGs are also precursors in forming O ₃ and consist of compounds containing methane, ethane, propane, butane, and longer chain hydrocarbons, which are typically the result of some type of combustion/decomposition process. Smog is formed when ROG and NO _x react in the presence of sunlight. ROGs are a criteria pollutant since they are a precursor to O ₃ , which is a criteria pollutant. The terms ROG and VOC (see previous) interchangeably.	Sources similar to VOCs.	Health effects similar to VOCs.
Lead (Pb)	Pb is a heavy metal that is highly persistent in the environment and is considered a criteria pollutant. In the past, the primary source of Pb in the air was emissions from vehicles burning leaded gasoline. The major sources of Pb emissions are ore and metals processing, particularly Pb smelters, and piston-engine aircraft operating on leaded aviation gasoline. Other stationary sources include waste incinerators, utilities, and lead-acid battery manufacturers. It should be noted that the Project does not include	Metal smelters, resource recovery, leaded gasoline, deterioration of Pb paint.	Fetuses, infants, and children are more sensitive than others to the adverse effects of Pb exposure. Exposure to low levels of Pb can adversely affect the development and function of the central nervous system, leading to learning disorders, distractibility, inability to follow simple commands, and lower intelligence quotient. In adults, increased Pb levels are associated with increased blood pressure.



Criteria Pollutant	Description	Sources	Health Effects
	operational activities such as metal processing or Pb acid battery manufacturing. As such, the Project is not anticipated to generate a quantifiable amount of Pb emissions.		Pb poisoning can cause anemia, lethargy, seizures, and death; although it appears that there are no direct effects of Pb on the respiratory system. Pb can be stored in the bone from early age environmental exposure, and elevated blood Pb levels can occur due to breakdown of bone tissue during pregnancy, hyperthyroidism (increased secretion of hormones from the thyroid gland) and osteoporosis (breakdown of bony tissue). Fetuses and breast-fed babies can be exposed to higher levels of Pb because of previous environmental Pb exposure of their mothers.
Odor	Odor means the perception experienced by a person when one or more chemical substances in the air come into contact with the human olfactory nerves (6).	Odors can come from many sources including animals, human activities, industry, natures, and vehicles.	Offensive odors can potentially affect human health in several ways. First, odorant compounds can irritate the eye, nose, and throat, which can reduce respiratory volume. Second, studies have shown that the VOCs that cause odors can stimulate sensory nerves to cause neurochemical changes that might influence health, for instance, by compromising the immune system. Finally, unpleasant odors can trigger memories or attitudes linked to unpleasant odors, causing cognitive and emotional effects such as stress.



2.5 EXISTING AIR QUALITY

Existing air quality is measured at established SCAQMD air quality monitoring stations. Monitored air quality is evaluated in the context of ambient air quality standards. These standards are the levels of air quality that are considered safe, with an adequate margin of safety, to protect the public health and welfare. NAAQS and California Ambient Air Quality Standards (CAAQS) currently in effect are shown in Table 2-2 (7).

The determination of whether a region's air quality is healthful or unhealthful is determined by comparing contaminant levels in ambient air samples to the state and federal standards. At the time of this AQIA, the most recent state and federal standards were updated by CARB on May 4, 2016, as presented in Table 2-2. The air quality in a region is considered to be in attainment by the state if the measured ambient air pollutant levels for O₃, CO (except 8-hour Lake Tahoe), SO₂ (1 and 24 hour), NO₂, PM₁₀, and PM_{2.5} do not exceed standards. All others are not to be equaled or exceeded. It should be noted that the three-year period is presented for informational purposes and is not the basis for how the State assigns attainment status. Attainment status for a pollutant means that the SCAQMD meets the standards set by the EPA or the California EPA (CalEPA). Conversely, nonattainment means that an area has monitored air quality that does not meet the NAAQS or CAAQS standards. In order to improve air quality in nonattainment areas, CARB has implemented a State Implementation Plan (SIP). The SIP outlines the measures that the state will take to improve air quality. Once nonattainment areas meet the standards and additional redesignation requirements, the EPA will designate the area as a maintenance area (8).



TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (1 OF 2)

		Ambient	an Quant	y Standard	13	
Pollutant	Averaging California Standards ¹			Nat	ional Standards	2
	Time	Concentration ³	Method ⁴	Primary 3,5	Secondary 3,6	Method 7
Ozone (O ₃) ⁸	1 Hour	0.09 ppm (180 μg/m³)	Ultraviolet Photometry	-	Same as Primary Standard	Ultraviolet
	8 Hour	0.070 ppm (137 µg/m ³)	Filotometry	0.070 ppm (137 µg/m³)	Filliary Standard	Photometry
Respirable Particulate	24 Hour	50 μg/m ³	Gravimetric or	150 μg/m ³	Same as	Inertial Separation and Gravimetric
Matter (PM10) ⁹	Annual Arithmetic Mean	20 μg/m ³	Beta Attenuation	25—13	Primary Standard	Analysis
Fine Particulate	24 Hour	_	_	35 μg/m ³	Same as Primary Standard	Inertial Separation and Gravimetric
Matter (PM2.5) ⁹	Annual Arithmetic Mean	12 μg/m ³	Gravimetric or Beta Attenuation	12.0 µg/m³	15 μg/m³	Analysis
Carbon	1 Hour	20 ppm (23 mg/m ³)	Non Dienoreivo	35 ppm (40 mg/m³)	==	Non Dispossivo
Monoxide	8 Hour	9.0 ppm (10 mg/m ³)	Non-Dispersive Infrared Photometry (NDIR)	9 ppm (10 mg/m ³)	=	Non-Dispersive Infrared Photometry (NDIR)
(CO)	8 Hour (Lake Tahoe)	6 ppm (7 mg/m ³)		228	<u>355</u>	
Nitrogen Dioxide	1 Hour	0.18 ppm (339 μg/m³)	Gas Phase Chemiluminescence	100 ppb (188 µg/m³)	_	Gas Phase Chemiluminescence
(NO ₂) ¹⁰	Annual Arithmetic Mean	0.030 ppm (57 μg/m³)		0.053 ppm (100 μg/m³)	Same as Primary Standard	
	1 Hour	0.25 ppm (655 µg/m³)	Ultraviolet Fluorescence	75 ppb (196 μg/m³)	-	Ultraviolet Flourescence; Spectrophotometry (Pararosaniline Method)
Sulfur Dioxide	3 Hour	-		-	0.5 ppm (1300 µg/m³)	
(SO ₂) ¹¹	24 Hour	0.04 ppm (105 µg/m³)		0.14 ppm (for certain areas) ¹¹	<u> </u>	
	Annual Arithmetic Mean	() 		0.030 ppm (for certain areas) ¹¹	_	
	30 Day Average	1.5 μg/m ³		-	-	
Lead ^{12,13}	Calendar Quarter	-	Atomic Absorption	1.5 µg/m ³ (for certain areas) ¹²	Sample	High Volume Sampler and Atomic Absorption
	Rolling 3-Month Average	r :		0.15 µg/m³	Primary Standard	/ Book paon
Visibility Reducing Particles ¹⁴	8 Hour	See footnote 14	Beta Attenuation and Transmittance through Filter Tape	No National Standards		
Sulfates	24 Hour	25 μg/m³	Ion Chromatography			
Hydrogen Sulfide	1 Hour	0.03 ppm (42 µg/m³)	Ultraviolet Fluorescence			
Vinyl Chloride ¹²	24 Hour	0.01 ppm (26 μg/m³)	Gas Chromatography			

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (5/4/16)



TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (2 OF 2)

- California standards for ozone, carbon monoxide (except 8-hour Lake Tahoe), sulfur dioxide (1 and 24 hour), nitrogen dioxide, and
 particulate matter (PM10, PM2.5, and visibility reducing particles), are values that are not to be exceeded. All others are not to be
 equaled or exceeded. California ambient air quality standards are listed in the Table of Standards in Section 70200 of Title 17 of the
 California Code of Regulations.
- 2. National standards (other than ozone, particulate matter, and those based on annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth highest 8-hour concentration measured at each site in a year, averaged over three years, is equal to or less than the standard. For PM10, the 24 hour standard is attained when the expected number of days per calendar year with a 24-hour average concentration above 150 μg/m³ is equal to or less than one. For PM2.5, the 24 hour standard is attained when 98 percent of the daily concentrations, averaged over three years, are equal to or less than the standard. Contact the U.S. EPA for further clarification and current national policies.
- 3. Concentration expressed first in units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr; ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.
- Any equivalent measurement method which can be shown to the satisfaction of the ARB to give equivalent results at or near the level of
 the air quality standard may be used.
- 5. National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.
- National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.
- Reference method as described by the U.S. EPA. An "equivalent method" of measurement may be used but must have a "consistent relationship to the reference method" and must be approved by the U.S. EPA.
- 8. On October 1, 2015, the national 8-hour ozone primary and secondary standards were lowered from 0.075 to 0.070 ppm.
- 9. On December 14, 2012, the national annual PM2.5 primary standard was lowered from 15 μg/m³ to 12.0 μg/m³. The existing national 24-hour PM2.5 standards (primary and secondary) were retained at 35 μg/m³, as was the annual secondary standard of 15 μg/m³. The existing 24-hour PM10 standards (primary and secondary) of 150 μg/m³ also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.
- 10. To attain the 1-hour national standard, the 3-year average of the annual 98th percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.
- 11. On June 2, 2010, a new 1-hour SO₂ standard was established and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99th percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO₂ national standards (24-hour and annual) remain in effect until one year after an area is designated for the 2010 standard, except that in areas designated nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved.
 - Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.
- 12. The ARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.
- 13. The national standard for lead was revised on October 15, 2008 to a rolling 3-month average. The 1978 lead standard (1.5 µg/m³ as a quarterly average) remains in effect until one year after an area is designated for the 2008 standard, except that in areas designated nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standard are approved.
- 14. In 1989, the ARB converted both the general statewide 10-mile visibility standard and the Lake Tahoe 30-mile visibility standard to instrumental equivalents, which are "extinction of 0.23 per kilometer" and "extinction of 0.07 per kilometer" for the statewide and Lake Tahoe Air Basin standards, respectively.

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (5/4/16)



2.6 REGIONAL AIR QUALITY

Air pollution contributes to a wide variety of adverse health effects. The EPA has established NAAQS for six of the most common air pollutants: CO, Pb, O_3 , particulate matter (PM $_{10}$ and PM $_{2.5}$), NO $_2$, and SO $_2$ which are known as criteria pollutants. The SCAQMD monitors levels of various criteria pollutants at 37 permanent monitoring stations and 5 single-pollutant source Pb air monitoring sites throughout the air district (9). On February 21, 2019, CARB posted the 2018 amendments to the state and national area designations. See Table 2-3 for attainment designations for the SCAB (10). Appendix 2.1 provides geographic representation of the state and federal attainment status for applicable criteria pollutants within the SCAB.

TABLE 2-3: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE SCAB

Criteria Pollutant	State Designation	Federal Designation		
O ₃ – 1-hour standard	Nonattainment			
O ₃ – 8-hour standard	Nonattainment	Nonattainment		
PM ₁₀	Nonattainment	Attainment		
PM _{2.5}	Nonattainment	Nonattainment		
СО	Attainment	Unclassifiable/Attainment		
NO ₂	Attainment	Unclassifiable/Attainment		
SO ₂	Unclassifiable/Attainment	Unclassifiable/Attainment		
Pb ¹	Attainment	Unclassifiable/Attainment		

Note: See Appendix 2.1 for a detailed map of State/National Area Designations within the SCAB

2.7 LOCAL AIR QUALITY

The SCAQMD has designated general forecast areas and air monitoring areas (referred to as Source Receptor Areas [SRA]) throughout the district in order to provide Southern California residents about the air quality conditions. The Project site is located within the Perris Valley area (SRA 24). The Perris Valley monitoring station is located approximately 9.5 miles south of the Project site and reports air quality statistics for O₃ and PM₁₀. The Metropolitan Riverside County monitoring station which is located 9.2 miles northwest of the Project site in SRA 23, records air quality data for CO, NO₂, and PM_{2.5}. It should be noted that data from Metropolitan Riverside County monitoring station was utilized in lieu of the Perris Valley monitoring station only in instances where data was not available.

The most recent three (3) years of data available is shown on Table 2-4 and identifies the number of days ambient air quality standards were exceeded for the study area, which is considered to be representative of the local air quality at the Development Site. Data for O_3 , CO, NO_2 , PM_{10} , and $PM_{2.5}$ for 2018 through 2020 was obtained from the SCAQMD Air Quality Data Tables (11).



[&]quot;-" = The national 1-hour O₃ standard was revoked effective June 15, 2005.

 $^{^{}m 1}$ The Federal nonattainment designation for lead is only applicable towards the Los Angeles County portion of the SCAB.

Additionally, data for SO₂ has been omitted as attainment is regularly met in the SCAB and few monitoring stations measure SO₂ concentrations.

TABLE 2-4: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2018-2020

Dollutont	Charadand	Year					
Pollutant	Standard	2018	2019	2020			
O ₃							
Maximum Federal 1-Hour Concentration (ppm)		0.117	0.118	0.125			
Maximum Federal 8-Hour Concentration (ppm)		0.103	0.095	0.106			
Number of Days Exceeding State 1-Hour Standard	> 0.09 ppm	31	26	34			
Number of Days Exceeding State/Federal 8-Hour Standard	> 0.070 ppm	67	64	74			
СО							
Maximum Federal 1-Hour Concentration	> 35 ppm	2.2	1.5	1.9			
Maximum Federal 8-Hour Concentration	> 20 ppm	2.0	1.2	1.4			
NO ₂							
Maximum Federal 1-Hour Concentration	> 0.100 ppm	0.055	0.056	0.066			
Annual Federal Standard Design Value		0.014	0.014	0.014			
PM ₁₀							
Maximum Federal 24-Hour Concentration (μg/m³)	> 150 μg/m ³	64	97	77			
Annual Federal Arithmetic Mean (μg/m³)		29.7	25.3	35.9			
Number of Days Exceeding Federal 24-Hour Standard	> 150 μg/m ³	0	0	0			
Number of Days Exceeding State 24-Hour Standard	> 50 μg/m ³	3	4	6			
PM _{2.5}							
Maximum Federal 24-Hour Concentration (μg/m³)	> 35 μg/m ³	50.70	46.70	41.00			
Annual Federal Arithmetic Mean (μg/m³)	> 12 μg/m ³	12.41	11.13	12.63			
Number of Days Exceeding Federal 24-Hour Standard	> 35 μg/m ³	2	4	4			

ppm = Parts Per Million

μg/m³ = Microgram per Cubic Meter

Source: Data for O₃, CO, NO₂, PM₁₀, and PM_{2.5} was obtained from SCAQMD Air Quality Data Tables.

2.8 REGULATORY BACKGROUND

2.8.1 FEDERAL REGULATIONS

The EPA is responsible for setting and enforcing the NAAQS for O_3 , CO, NO_X , SO_2 , PM_{10} , and Pb (12). The EPA has jurisdiction over emissions sources that are under the authority of the federal government including aircraft, locomotives, and emissions sources outside state waters (Outer Continental Shelf). The EPA also establishes emission standards for vehicles sold in states other than California. Automobiles sold in California must meet the stricter emission requirements of CARB.



The Federal Clean Air Act (CAA) was first enacted in 1955 and has been amended numerous times in subsequent years (1963, 1965, 1967, 1970, 1977, and 1990). The CAA establishes the federal air quality standards, the NAAQS, and specifies future dates for achieving compliance (13). The CAA also mandates that states submit and implement SIPs for local areas not meeting these standards. These plans must include pollution control measures that demonstrate how the standards would be met.

The 1990 amendments to the CAA that identify specific emission reduction goals for areas not meeting the NAAQS require a demonstration of reasonable further progress toward attainment and incorporate additional sanctions for failure to attain or to meet interim milestones. The sections of the CAA most directly applicable to the development of the Project site include Title I (Non-Attainment Provisions) and Title II (Mobile Source Provisions) (14) (15). Title I provisions were established with the goal of attaining the NAAQS for the following criteria pollutants O₃, NO₂, SO₂, PM₁₀, CO, PM_{2.5}, and Pb. The NAAQS were amended in July 1997 to include an additional standard for O₃ and to adopt a NAAQS for PM_{2.5}. Table 2-3 (previously presented) provides the NAAQS within the SCAB.

Mobile source emissions are regulated in accordance with Title II provisions. These provisions require the use of cleaner burning gasoline and other cleaner burning fuels such as methanol and natural gas. Automobile manufacturers are also required to reduce tailpipe emissions of hydrocarbons and NO_X . NO_X is a collective term that includes all forms of NO_X which are emitted as byproducts of the combustion process.

2.8.2 CALIFORNIA REGULATIONS

CARB

CARB, which became part of the CalEPA in 1991, is responsible for ensuring implementation of the California Clean Air Act (AB 2595), responding to the federal CAA, and for regulating emissions from consumer products and motor vehicles. AB 2595 mandates achievement of the maximum degree of emissions reductions possible from vehicular and other mobile sources in order to attain the state ambient air quality standards by the earliest practical date. CARB established the CAAQS for all pollutants for which the federal government has NAAQS and, in addition, establishes standards for SO_4 , visibility, hydrogen sulfide (H_2S), and vinyl chloride (C_2H_3Cl). However, at this time, H_2S and C_2H_3Cl are not measured at any monitoring stations in the SCAB because they are not considered to be a regional air quality problem. Generally, the CAAQS are more stringent than the NAAQS (16) (12).

Local air quality management districts, such as the SCAQMD, regulate air emissions from stationary sources such as commercial and industrial facilities. All air pollution control districts have been formally designated as attainment or non-attainment for each CAAQS.

Serious non-attainment areas are required to prepare Air Quality Management Plans (AQMP) that include specified emission reduction strategies in an effort to meet clean air goals. These plans are required to include:

Application of Best Available Retrofit Control Technology to existing sources;



- Developing control programs for area sources (e.g., architectural coatings and solvents) and indirect sources (e.g., motor vehicle use generated by residential and commercial development);
- A District permitting system designed to allow no net increase in emissions from any new or modified permitted sources of emissions;
- Implementing reasonably available transportation control measures and assuring a substantial reduction in growth rate of vehicle trips and miles traveled;
- Significant use of low emissions vehicles by fleet operators;
- Sufficient control strategies to achieve a 5% or more annual reduction in emissions or 15% or more in a period of three years for ROGs, NO_x, CO and PM₁₀. However, air basins may use alternative emission reduction strategy that achieves a reduction of less than 5% per year under certain circumstances.

TITLE 24 ENERGY EFFICIENCY STANDARDS AND CALIFORNIA GREEN BUILDING STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: The California Energy Code was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption.

The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on January 1, 2009, and is administered by the California Building Standards Commission.

CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2019 California Green Building Code Standards that became effective January 1, 2020.

Local jurisdictions are permitted to adopt more stringent requirements, as state law provides methods for local enhancements. CALGreen recognizes that many jurisdictions have developed existing construction waste and demolition ordinances and defers to them as the ruling guidance provided they establish a minimum 65% diversion requirement.

The code also provides exemptions for areas not served by construction waste and demolition recycling infrastructure. The State Building Code provides the minimum standard that buildings must meet in order to be certified for occupancy, which is generally enforced by the local building official.

Energy efficient buildings require less electricity; therefore, increased energy efficiency reduces fossil fuel consumption and decreases greenhouse gas (GHG) emissions. The 2019 version of Title 24 was adopted by the CEC) and became effective on January 1, 2020.

The 2019 Title 24 standards would result in less energy use, thereby reducing air pollutant emissions associated with energy consumption in the SCAB and across the State of California. For example, the 2019 Title 24 standards require solar photovoltaic systems for new homes, establish requirements for newly constructed healthcare facilities, encourage demand responsive technologies for residential buildings, and update indoor and outdoor lighting requirements for nonresidential buildings.



The CEC anticipates that single-family homes built with the 2019 standards would use approximately 7% less energy compared to the residential homes built under the 2016 standards. Additionally, after implementation of solar photovoltaic systems, homes built under the 2019 standards would use about 53% less energy than homes built under the 2016 standards. Nonresidential buildings (such as the Project) would use approximately 30% less energy due to lighting upgrade requirements (18).

Because the Project would be constructed after January 1, 2019, the 2019 CALGreen standards are applicable to the Project and require, among other items (19):

NONRESIDENTIAL MANDATORY MEASURES

- Short-term bicycle parking. If the new project or an additional alteration is anticipated to generate
 visitor traffic, provide permanently anchored bicycle racks within 200 feet of the visitors'
 entrance, readily visible to passers-by, for 5% of new visitor motorized vehicle parking spaces
 being added, with a minimum of one two-bike capacity rack (5.106.4.1.1).
- Long-term bicycle parking. For new buildings with tenant spaces that have 10 or more tenant-occupants, provide secure bicycle parking for 5% of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility (5.106.4.1.2).
- Designated parking for clean air vehicles. In new projects or additions to alterations that add 10 or more vehicular parking spaces, provide designated parking for any combination of low-emitting, fuel-efficient and carpool/van pool vehicles as shown in Table 5.106.5.2 (5.106.5.2).
- Electric vehicle (EV) charging stations. New construction shall facilitate the future installation of EV supply equipment. The compliance requires empty raceways for future conduit and documentation that the electrical system has adequate capacity for the future load. The number of spaces to be provided for is contained in Table 5.106. 5.3.3 (5.106.5.3).
- Outdoor light pollution reduction. Outdoor lighting systems shall be designed to meet the backlight, uplight and glare ratings per Table 5.106.8 (5.106.8)
- Construction waste management. Recycle and/or salvage for reuse a minimum of 65% of the nonhazardous construction and demolition waste in accordance with Section
- 5.408.1.1. 5.405.1.2, or 5.408.1.3; or meet a local construction and demolition waste management ordinance, whichever is more stringent (5.408.1).
- Excavated soil and land clearing debris. 100% of trees, stumps, rocks and associated vegetation and soils resulting primarily from land clearing shall be reused or recycled. For a phased project, such material may be stockpiled on site until the storage site is developed (5.408.3).
- Recycling by Occupants. Provide readily accessible areas that serve the entire building and are
 identified for the depositing, storage, and collection of non-hazardous materials for recycling,
 including (at a minimum) paper, corrugated cardboard, glass, plastics, organic waste, and metals
 or meet a lawfully enacted local recycling ordinance, if more restrictive (5.410.1).
- Water conserving plumbing fixtures and fittings. Plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following:
 - Water Closets. The effective flush volume of all water closets shall not exceed 1.28 gallons per flush (5.303.3.1)



- Urinals. The effective flush volume of wall-mounted urinals shall not exceed 0.125 gallons per flush (5.303.3.2.1). The effective flush volume of floor-mounted or other urinals shall not exceed 0.5 gallons per flush (5.303.3.2.2).
- Showerheads. Single showerheads shall have a minimum flow rate of not more than 1.8 gallons per minute and 80 psi (5.303.3.3.1). When a shower is served by more than one showerhead, the combine flow rate of all showerheads and/or other shower outlets controlled by a single valve shall not exceed 1.8 gallons per minute at 80 psi (5.303.3.3.2).
- Faucets and fountains. Nonresidential lavatory faucets shall have a maximum flow rate of not more than 0.5 gallons per minute at 60 psi (5.303.3.4.1). Kitchen faucets shall have a maximum flow rate of not more than 1.8 gallons per minute of 60 psi (5.303.3.4.2). Wash fountains shall have a maximum flow rate of not more than 1.8 gallons per minute (5.303.3.4.3). Metering faucets shall not deliver more than 0.20 gallons per cycle (5.303.3.4.4). Metering faucets for wash fountains shall have a maximum flow rate not more than 0.20 gallons per cycle (5.303.3.4.5).
- Outdoor potable water uses in landscaped areas. Nonresidential developments shall comply with
 a local water efficient landscape ordinance or the current California Department of Water
 Resources' Model Water Efficient (MWELO), whichever is more stringent (5.304.1).
- Water meters. Separate submeters or metering devices shall be installed for new buildings or additions in excess of 50,000 sf or for excess consumption where any tenant within a new building or within an addition that is project to consume more than 1,000 gallons per day (5.303.1.1 and 5.303.1.2).
- Outdoor water uses in rehabilitated landscape projects equal or greater than 2,500 sf. Rehabilitated landscape projects with an aggregate landscape area equal to or greater than 2,500 sf requiring a building or landscape permit (5.304.3).
- Commissioning. For new buildings 10,000 sf and over, building commissioning shall be included
 in the design and construction processes of the building project to verify that the building systems
 and components meet the owner's or owner representative's project requirements (5.410.2).

2.8.3 AQMP

Currently, the NAAQS and CAAQS are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMP to meet the state and federal ambient air quality standards (17). AQMPs are updated regularly to ensure an effective reduction in emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy. A detailed discussion on the AQMP and Project consistency with the AQMP is provided in Section 3.10.

2.9 REGIONAL AIR QUALITY IMPROVEMENT

The Project is within the jurisdiction of the SCAQMD. In 1976, California adopted the Lewis Air Quality Management Act which created SCAQMD from a voluntary association of air pollution control districts in Los Angeles, Orange, Riverside, and San Bernardino counties. The geographic area of which SCAQMD consists of is known as the SCAB. SCAQMD develops comprehensive plans and regulatory programs for the region to attain federal standards by dates specified in federal law. The agency is also responsible for meeting state standards by the earliest date achievable, using reasonably available control measures.



SCAQMD rule development through the 1970s and 1980s resulted in dramatic improvement in SCAB air quality. Nearly all control programs developed through the early 1990s relied on (i) the development and application of cleaner technology; (ii) add-on emission controls, and (iii) uniform CEQA review throughout the SCAB. Industrial emission sources have been significantly reduced by this approach and vehicular emissions have been reduced by technologies implemented at the state level by CARB.

As discussed above, the SCAQMD is the lead agency charged with regulating air quality emission reductions for the entire SCAB. SCAQMD created AQMPs which represent a regional blueprint for achieving healthful air on behalf of the 16 million residents of the SCAB. The 2012 AQMP states, "the remarkable historical improvement in air quality since the 1970's is the direct result of Southern California's comprehensive, multiyear strategy of reducing air pollution from all sources as outlined in its AQMPs," (18).

Emissions of O_3 , NO_X , VOC, and CO have been decreasing in the SCAB since 1975 and are projected to continue to decrease through 2020 (19). These decreases result primarily from motor vehicle controls and reductions in evaporative emissions. Although vehicle miles traveled (VMT) in the SCAB continue to increase, NO_X and VOC levels are decreasing because of the mandated controls on motor vehicles and the replacement of older polluting vehicles with lower-emitting vehicles. NO_X emissions from electric utilities have also decreased due to use of cleaner fuels and renewable energy. O_3 contour maps show that the number of days exceeding the 8-hour NAAQS has generally decreased between 1980 and 2020. For 2020, there was an overall decrease in exceedance days compared with the 1980 period. However, as shown on Table 2-5, O_3 levels have increased in the past three years due to higher temperatures and stagnant weather conditions. Notwithstanding, O_3 levels in the SCAB have decreased substantially over the last 30 years with the current maximum measured concentrations being approximately one-third of concentrations within the late 70's (20).



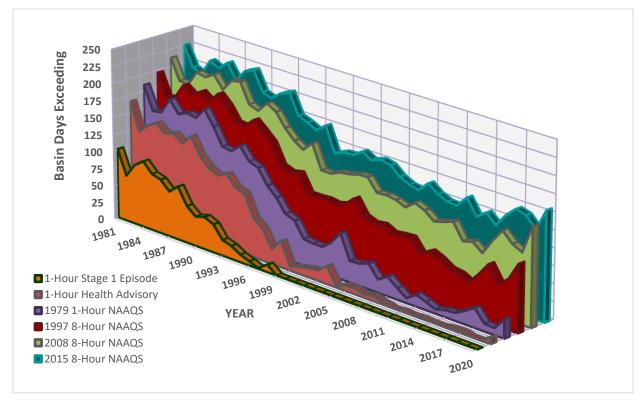


TABLE 2-5: SCAB O₃ TREND

Source: 2020 SCAQMD, Historical O₃ Air Quality Trends (1976-2020)

The overall trends of PM_{10} and $PM_{2.5}$ levels in the air (not emissions) show an overall improvement since 1975. Direct emissions of PM_{10} have remained somewhat constant in the SCAB and direct emissions of $PM_{2.5}$ have decreased slightly since 1975. Area wide sources (fugitive dust from roads, dust from construction, and other sources) contribute the greatest amount of direct particulate matter emissions.

As with other pollutants, the most recent PM_{10} statistics show an overall improvement as illustrated in Tables 2-6 and 2-7. During the period for which data are available, the 24-hour national annual average concentration for PM_{10} decreased by approximately 46%, from 103.7 microgram per cubic meter ($\mu g/m^3$) in 1988 to 55.5 $\mu g/m^3$ in 2020 (21). Although the values are below the federal standard, it should be noted that there are days within the year where the concentrations would exceed the threshold. The 24-hour state annual average for emissions for PM_{10} , have decreased by approximately 64%, from 93.9 $\mu g/m^3$ in 1989 to 33.9 $\mu g/m^3$ in 2020 (21). Although data in the late 1990's show some variability, this is probably due to the advances in meteorological science rather than a change in emissions. Similar to the ambient concentrations, the calculated number of days above the 24-hour PM_{10} standards has also shown an overall drop.



TABLE 2-6: SCAB AVERAGE 24-HOUR CONCENTRATION PM₁₀ TREND (BASED ON FEDERAL STANDARD)¹

Source: 2020 CARB, iADAM: Top Four Summary: PM₁₀ 24-Hour Averages (1988-2020)

¹Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.

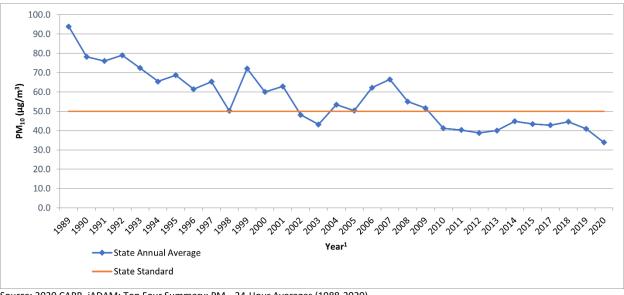


TABLE 2-7: SCAB ANNUAL AVERAGE CONCENTRATION PM₁₀ TREND (BASED ON STATE STANDARD)¹

Source: 2020 CARB, iADAM: Top Four Summary: PM₁₀ 24-Hour Averages (1988-2020)

Tables 2-8 and 2-9 shows the most recent 24-hour average PM_{2.5} concentrations in the SCAB from 1999 through 2020. Overall, the national and state annual average concentrations have decreased by almost 50% and 31% respectively (21). It should be noted that the SCAB is currently designated as nonattainment for the state and federal PM_{2.5} standards.



¹ Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.

45.0 40.0 35.0 **BM**⁵⁷ (**hg/m**³) 25.0 25.0 20.0 15.0 10.0 5.0 0.0

TABLE 2-8: SCAB 24-HOUR AVERAGE CONCENTRATION PM_{2.5} TREND (BASED ON FEDERAL STANDARD)¹

Source: 2020 CARB, iADAM: Top Four Summary: PM_{2.5} 24-Hour Averages (1999-2020)

Federal Standard

Federal 24-Hour Average

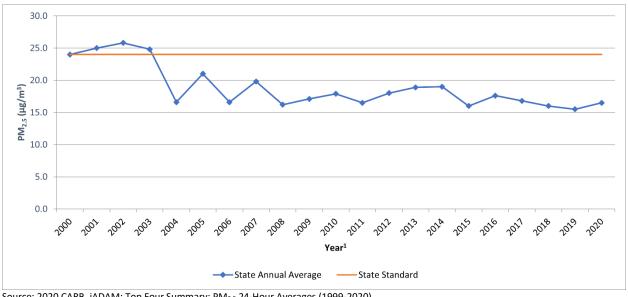


TABLE 2-9: SCAB ANNUAL AVERAGE CONCENTRATION PM2.5 TREND (BASED ON STATE STANDARD)1

Source: 2020 CARB, iADAM: Top Four Summary: PM_{2.5} 24-Hour Averages (1999-2020)

While the 2012 AQMP PM₁₀ attainment demonstration and the 2015 associated supplemental SIP submission indicated that attainment of the 24-hour standard was predicted to occur by the end of 2015, it could not anticipate the effect of the ongoing drought on the measured PM_{2.5}.



¹ Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.

¹ Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.

The 2006 to 2010 base period used for the 2012 attainment demonstration had near-normal rainfall. While the trend of PM_{2.5}-equivalent emission reductions continued through 2015, the severe drought conditions contributed to the PM_{2.5} increases observed after 2012. As a result of the disrupted progress toward attainment of the federal 24-hour PM_{2.5} standard, SCAQMD submitted a request and the EPA approved, in January 2016, a "bump up" to the nonattainment classification from "moderate" to "serious," with a new attainment deadline as soon as practicable, but not beyond December 31, 2019. As of March 14, 2019, the EPA approved portions of a SIP revision submitted by California to address CAA requirements for the 2006 24-hour PM_{2.5} NAAQS in the Los Angeles-SCAB Serious PM_{2.5} nonattainment area. The EPA also approved 2017 and 2019 motor vehicle emissions budgets for transportation conformity purposes and inter-pollutant trading ratios for use in transportation conformity analyses (22).

In March 2017, the SCAQMD released the Final 2016 AQMP. The 2016 AQMP continues to evaluate current integrated strategies and control measures to meet the NAAQS, as well as explore new and innovative methods to reach its goals. Some of these approaches include utilizing incentive programs, recognizing existing co-benefit programs from other sectors, and developing a strategy with fair-share reductions at the federal, state, and local levels (23). Similar to the 2012 AQMP, the 2016 AQMP incorporates scientific and technological information and planning assumptions, including the 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy (2016-2040 RTP/SCS) and updated emission inventory methodologies for various source categories (17).

The 2022 AQMP is currently being developed by SCAQMD to address the EPA's strengthened ozone standard. Development of the 2022 AQMP is in its early stages and no formal timeline for completion and adoption is currently known.

The most recent CO concentrations in the SCAB are shown in Table 2-10 (21). CO concentrations in the SCAB have decreased markedly — a total decrease of more about 80% in the peak 8-hour concentration from 1986 to 2012. It should be noted 2012 is the most recent year where 8-hour CO averages and related statistics are available in the SCAB. The number of exceedance days has also declined. The entire SCAB is now designated as attainment for both the state and national CO standards. Ongoing reductions from motor vehicle control programs should continue the downward trend in ambient CO concentrations.



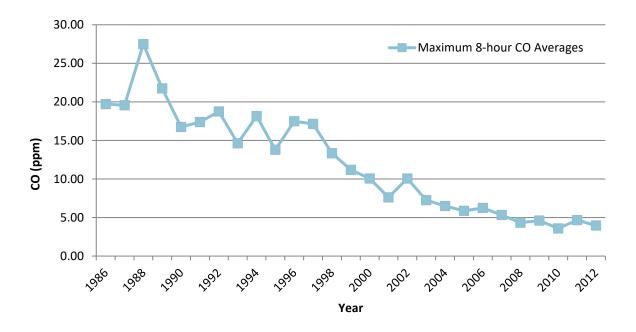


TABLE 2-10: SCAB 8-HOUR AVERAGE CONCENTRATION CO TREND1

Source: 2020 CARB, iADAM: Top Four Summary: CO 8-Hour Averages (1986-2012)

¹ The most recent year where 8-hour concentration data is available is 2012.

Part of the control process of the SCAQMD's duty to greatly improve the air quality in the SCAB is the uniform CEQA review procedures required by SCAQMD's CEQA Air Quality Handbook (1993) (1993 CEQA Handbook) (24). The single threshold of significance used to assess Project direct and cumulative impacts has in fact "worked" as evidenced by the track record of the air quality in the SCAB dramatically improving over the course of the past decades. As stated by the SCAQMD, the District's thresholds of significance are based on factual and scientific data and are therefore appropriate thresholds of significance to use for this Project.

The most recent NO₂ data for the SCAB is shown in Tables 2-11 and 2-12 (21). Over the last 50 years, NO₂ values have decreased significantly; the peak 1-hour national and state averages for 2020 is approximately 80% lower than what it was during 1963. The SCAB attained the State 1-hour NO₂ standard in 1994, bringing the entire state into attainment. A new state annual average standard of 0.030 ppm was adopted by CARB in February 2007 (25). The new standard is just barely exceeded in the SCAQMD. NO₂ is formed from NO_x emissions, which also contribute to O₃. As a result, the majority of the future emission control measures would be implemented as part of the overall O₃ control strategy. Many of these control measures would target mobile sources, which account for more than three-quarters of California's NO_x emissions. These measures are expected to bring the SCAQMD into attainment of the state annual average standard.



800.0
700.0
600.0
500.0
200.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0
100.0

TABLE 2-11: SCAB 1-HOUR AVERAGE CONCENTRATION NO₂ TREND (BASED ON FEDERAL STANDARD)

Source: 2020 CARB, iADAM: Top Four Summary: CO 1-Hour Averages (1963-2020)

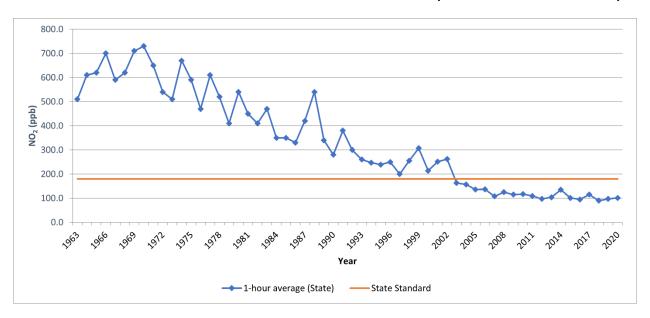


TABLE 2-12: SCAB 1-HOUR AVERAGE CONCENTRATION NO2 TREND (BASED ON STATE STANDARD)

Source: 2020 CARB, iADAM: Top Four Summary: CO 1-Hour Averages (1963-2020)

2.9.1 TOXIC AIR CONTAMINANTS (TAC) TRENDS

In 1984, as a result of public concern for exposure to airborne carcinogens, CARB adopted regulations to reduce the amount of TAC emissions resulting from mobile and area sources, such as cars, trucks, stationary sources, and consumer products. According to the *Ambient and Emission Trends of Toxic Air Contaminants in California* journal article (26) which was prepared for CARB, results show that between 1990-2012, ambient concentration and emission trends for



the seven TACs responsible for most of the known cancer risk associated with airborne exposure in California have declined significantly (between 1990 and 2012). The seven TACs studied include those that are derived from mobile sources: diesel particulate matter (DPM), benzene (C_6H_6), and 1,3-butadiene (C_4H_6); those that are derived from stationary sources: perchloroethylene (C_2Cl_4) and hexavalent chromium (Cr(VI)); and those derived from photochemical reactions of emitted VOCs: formaldehyde (C_2H_4O) and acetaldehyde (C_2H_4O)². The decline in ambient concentration and emission trends of these TACs are a result of various regulations CARB has implemented to address cancer risk.

MOBILE SOURCE TACS

CARB introduced two programs that aimed at reducing mobile emissions for light and medium duty vehicles through vehicle emissions controls and cleaner fuel. In California, light-duty vehicles sold after 1996 are equipped with California's second-generation On-Board Diagnostic (OBD-II) system. The OBD-II system monitors virtually every component that can affect the emission performance of the vehicle to ensure that the vehicle remains as clean as possible over its entire life and assists repair technicians in diagnosing and fixing problems with the computerized engine controls. If a problem is detected, the OBD-II system illuminates a warning lamp on the vehicle instrument panel to alert the driver. This warning lamp typically contains the phrase "Check Engine" or "Service Engine Soon." The system would also store important information about the detected malfunction so that a repair technician can accurately find and fix the problem. CARB has recently developed similar OBD requirements for heavy-duty vehicles over 14,000 pounds (lbs). CARB's phase II Reformulated Gasoline Regulation (RFG-2), adopted in 1996, also led to a reduction of mobile source emissions. Through such regulations, benzene levels declined 88% from 1990-2012. 1,3-Butadiene concentrations also declined 85% from 1990-2012 as a result of the use of reformulated gasoline and motor vehicle regulations (26).

In 2000, CARB's Diesel Risk Reduction Plan (DRRP) recommended the replacement and retrofit of diesel-fueled engines and the use of ultra-low-sulfur (<15 ppm) diesel fuel. As a result of these measures, DPM concentrations have declined 68% since 2000, even though the state's population increased 31% and the amount of diesel vehicles miles traveled increased 81%, as shown on Exhibit 2-B. With the implementation of these diesel-related control regulations, CARB expects a DPM decline of 71% for 2000-2020.

SCAQMD's Multiple Air Toxics Exposure Study (MATES) study, discussed later illustrates the cancer risk trends, which show an approximate 80% reduction in risk from 2000 to 2020, which correlates to the reductions in DPM anticipated by CARB.


-



² It should be noted that ambient DPM concentrations are not measured directly. Rather, a surrogate method using the coefficient of haze (COH) and elemental carbon (EC) is used to estimate DPM concentrations.

EXHIBIT 2-A: DPM AND DIESEL VEHICLE MILES TREND

California Population, Gross State Product (GSP), Diesel Cancer Risk, Diesel Vehicle-Miles-Traveled (VMT)

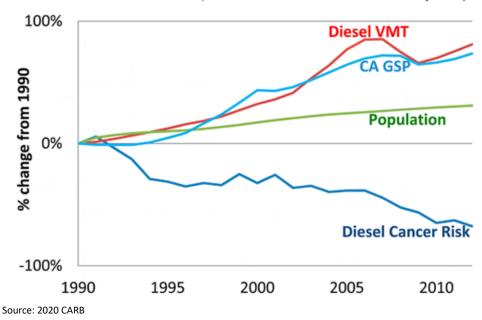

DIESEL REGULATIONS

CARB and the Ports of Los Angeles and Long Beach (POLA and POLB) have adopted several iterations of regulations for diesel trucks that are aimed at reducing DPM. More specifically, CARB Drayage Truck Regulation (27), CARB statewide On-road Truck and Bus Regulation (28), and the Ports of Los Angeles and Long Beach Clean Truck Program (CTP) require accelerated implementation of "clean trucks" into the statewide truck fleet (29). In other words, older more polluting trucks would be replaced with newer, cleaner trucks as a function of these regulatory requirements.

Moreover, the average statewide DPM emissions for Heavy Duty Trucks (HDT), in terms of grams of DPM generated per mile traveled, would dramatically be reduced due to the aforementioned regulatory requirements.

Diesel emissions identified in this analysis would therefore overstate future DPM emissions since not all the regulatory requirements are reflected in the modeling.

CANCER RISK TRENDS

Based on information available from CARB, overall cancer risk throughout the SCAB has had a declining trend since 1990. In 1998, following an exhaustive 10-year scientific assessment process, CARB identified particulate matter from diesel-fueled engines as a toxic air contaminant. The SCAQMD initiated a comprehensive urban toxic air pollution study called the MATES. DPM accounts for more than 70% of the cancer risk.



In January 2018, as part of the overall effort to reduce air toxics exposure in the SCAB, SCAQMD began conducting the MATES V Program. MATES V field measurements were conducted at ten fixed sites (the same sites selected for MATES III and IV) to assess trends in air toxics levels. MATES V also included measurements of ultrafine particles (UFP) and black carbon (BC) concentrations, which can be compared to the UFP levels measured in MATES IV (30). The draft report for the MATES V study was published in late May and the comment submission deadline on June 7, 2021. In addition to new measurements and updated modeling results, several key updates were implemented in MATES V. First, MATES V estimates cancer risks by taking into account multiple exposure pathways, which includes inhalation and non-inhalation pathways. This approach is consistent with how cancer risks are estimated in South Coast AQMD's programs such as permitting, Air Toxics Hot Spots (AB2588), and CEQA. Previous MATES studies quantified the cancer risks based on the inhalation pathway only. Second, along with cancer risk estimates, MATES V includes information on the chronic non-cancer risks from inhalation and noninhalation pathways for the first time. Cancer risks and chronic non-cancer risks from MATES II through IV measurements have been re-examined using current Office of Environmental Health Hazard Assessment (OEHHA) and CalEPA risk assessment methodologies and modern statistical methods to examine the trends over time (31).

MATES-V calculated cancer risks based on monitoring data collected at ten fixed sites within the SCAB. None of the fixed monitoring sites are within the local area of the Project site. However, MATES-V has extrapolated the excess cancer risk levels throughout the SCAB by modeling the specific grids. The Project is located within a quadrant of the geographic grid of the MATES-V model which predicted a cancer risk of 352 per million for the area containing the Project site. DPM is included in this cancer risk along with all other TAC sources. As in previous MATES iterations, diesel PM is the largest contributor to overall air toxics cancer risk. However, the average levels of diesel PM in MATES V are 53% lower at the 10 monitoring sites compared to MATES IV. Cumulative Project generated TACs are limited to DPM.



This page intentionally left blank



3 PROJECT AIR QUALITY IMPACT

3.1 Introduction

This study quantifies air quality emissions generated by construction and operation of the Project and addresses whether the Project conflicts with implementation of the SCAQMD's AQMP and Lead Agency planning regulations. The analysis of Project-generated air emissions determines whether the Project would result in a cumulatively considerable net increase of any criteria pollutant for which the SCAB is in non-attainment under an applicable NAAQS and CAAQS. Additionally, the Project has been evaluated to determine whether the Project would expose sensitive receptors to substantial pollutant concentrations and the impacts of odors. The significance of these potential impacts is described in the following sections.

3.2 STANDARDS OF SIGNIFICANCE

The criteria used to determine the significance of potential Project-related air quality impacts are taken from the *CEQA Guidelines* (14 CCR §§15000, et seq.). Based on these thresholds, a project would result in a significant impact related to air quality if it would (1):

- Conflict with or obstruct implementation of the applicable air quality plan.
- Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard.
- Expose sensitive receptors to substantial pollutant concentrations.
- Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

The SCAQMD has also developed regional significance thresholds for other regulated pollutants, as summarized at Table 3-1 (32). The SCAQMD's *CEQA Air Quality Significance Thresholds* (April 2019) indicate that any projects in the SCAB with daily emissions that exceed any of the indicated thresholds should be considered as having an individually and cumulatively significant air quality impact.

TABLE 3-1: MAXIMUM DAILY REGIONAL EMISSIONS THRESHOLDS

Pollutant	Regional Construction Threshold	Regional Operational Thresholds
NO _X	100 lbs/day	55 lbs/day
VOC	75 lbs/day	55 lbs/day
PM ₁₀	150 lbs/day	150 lbs/day
PM _{2.5}	55 lbs/day	55 lbs/day
SOx	150 lbs/day	150 lbs/day
со	550 lbs/day	550 lbs/day
Pb	3 lbs/day	3 lbs/day

lbs/day = Pounds Per Day



3.3 Models Employed To Analyze Air Quality

3.3.1 CALEEMOD

Land uses such as the Project affect air quality through construction-source and operational-source emissions.

In May 2021, the SCAQMD, in conjunction with the California Air Pollution Control Officers Association (CAPCOA) and other California air districts, released the latest version of the CalEEMod Version 2020.4.0. The purpose of this model is to calculate construction-source and operational-source criteria pollutant (VOCs, NOx, SOx, CO, PM₁₀, and PM_{2.5}) and GHG emissions from direct and indirect sources; and quantify applicable air quality and GHG reductions achieved from MMs (33). Accordingly, the latest version of CalEEMod has been used for this Project to determine construction and operational air quality emissions. Output from the model runs for both construction and operational activity are provided in Appendices 3.1 through 3.3.

3.4 CONSTRUCTION EMISSIONS

Construction activities associated with the Project will result in emissions of VOCs, NO_X , SO_X , CO, PM_{10} , and $PM_{2.5}$. Construction related emissions are expected from the following construction activities:

- Site Preparation
- Grading
- Building Construction
- Paving
- Architectural Coating

GRADING ACTIVITIES

Dust is typically a major concern during grading activities. Because such emissions are not amenable to collection and discharge through a controlled source, they are called "fugitive emissions". Fugitive dust emissions rates vary as a function of many parameters (soil silt, soil moisture, wind speed, area disturbed, number of vehicles, depth of disturbance or excavation, etc.). CalEEMod was utilized to calculate fugitive dust emissions resulting from this phase of activity. It is anticipated that the Project would require 10,600 cubic yards of export.

ON-ROAD TRIPS

Construction generates on-road vehicle emissions from vehicle usage for workers, hauling, and vendors commuting to and from the site. The number of workers, hauling, and vendor trips are presented below in Table 3-2. It should be noted that for Vendor Trips, specifically, CalEEMod only assigns Vendor Trips to the Building Construction phase. Vendor trips would likely occur during all phases of construction. As such, the CalEEMod defaults for Vendor Trips have been adjusted based on a ratio of the total vendor trips to the number of days of each subphase of activity.



TABLE 3-2: CONSTRUCTION TRIP ASSUMPTIONS

Construction Activity	Worker Trips Per Day	Vendor Trips Per Day	Total Hauling Trips
Site Preparation	5	6	0
Grading	18	7	1,325
Building Construction	145	38	0
Paving	13	3	0
Architectural Coating	29	3	0

3.4.1 CONSTRUCTION DURATION

Construction is anticipated to begin in February 2023 and will last through October 2023. The construction schedule utilized in the analysis, shown in Table 3-3, represents a "worst-case" analysis scenario should construction occur any time after the respective dates since emission factors for construction decrease as time passes and the analysis year increases due to emission regulations becoming more stringent³. The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per *CEQA Guidelines* (1).

TABLE 3-3: CONSTRUCTION DURATION

Construction Activity	Start Date	End Date	Days
Site Preparation	02/01/2023	02/28/2023	20
Grading	03/01/2023	03/31/2023	23
Building Construction	04/01/2023	09/29/2023	130
Paving	10/02/2023	10/13/2023	10
Architectural Coating	10/14/2023	10/27/2023	10

3.4.2 Construction Equipment

Consistent with industry standards and typical construction practices, each piece of equipment listed in Table 3-4 will operate up to a total of eight (8) hours per day, or more than two-thirds of the period during which construction activities are allowed pursuant to the code.



³ As shown in the CalEEMod User's Guide Version 2020.4.0, Section 4.3 "Off-Road Equipment" as the analysis year increases, emission factors for the same equipment pieces decrease due to the natural turnover of older equipment being replaced by newer less polluting equipment and new regulatory requirements.

TABLE 3-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Construction Activity	Equipment	Amount	Hours Per Day
Cita Duamanatian	Skip Loaders	1	8
Site Preparation	Tractors/Loaders/Backhoes	1	8
	Blade	1	8
Can dia a	Rubber Tired Dozers	1	8
Grading	Scrapers	4	8
	Tractors/Loaders/Backhoes	1	8
	Crane		8
Duilding Construction	Forklifts	3	8
Building Construction	Tractors/Loaders/Backhoes	2	8
	Welders	1	8
	Blade	1	8
Davide a	Paving Equipment	1	8
Paving	Rollers	2	8
	Skip Loaders	1	8
Architectural Coating	Air Compressors	1	8

3.4.3 CONSTRUCTION EMISSIONS SUMMARY

IMPACTS WITHOUT MITIGATION

CalEEMod calculates maximum daily emissions for summer and winter periods. The estimated maximum daily construction emissions without mitigation are summarized on Table 3-5. Detailed construction model outputs are presented in Appendix 3.1. Under the assumed scenarios, emissions resulting from the Project construction will not exceed criteria pollutant thresholds established by the SCAQMD for emissions of any criteria pollutant.



TABLE 3-5: OVERALL CONSTRUCTION EMISSIONS SUMMARY

Voor	Emissions (lbs/day) ¹					
Year	voc	NOx	со	SOx	PM ₁₀	PM _{2.5}
Summer						
2023	52.43	51.38	36.30	0.11	7.65	3.66
	•	Winter				
2023	52.42	51.74	36.22	0.11	7.65	3.66
Maximum Daily Emissions	52.43	51.74	36.30	0.11	7.65	3.66
SCAQMD Regional Threshold	75	100	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

Source: CalEEMod construction-source (unmitigated) emissions are presented in Appendix 3.1

3.5 OPERATIONAL EMISSIONS

Operational activities associated with the Project will result in emissions of VOCs, NO_X , SO_X , CO, PM_{10} , and $PM_{2.5}$. Operational emissions are expected from the following primary sources:

- Area Source Emissions
- Energy Source Emissions
- Mobile Source Emissions
- On-Site Cargo Handling Equipment Emissions
- Transportation Refrigeration Units (TRU) Emissions

3.5.1 AREA SOURCE EMISSIONS

ARCHITECTURAL COATINGS

Over a period of time the buildings that are part of this Project will require maintenance and will therefore produce emissions resulting from the evaporation of solvents contained in paints, varnishes, primers, and other surface coatings. The emissions associated with architectural coatings were calculated using CalEEMod.

CONSUMER PRODUCTS

Consumer products include, but are not limited to detergents, cleaning compounds, polishes, personal care products, and lawn and garden products. Many of these products contain organic compounds which when released in the atmosphere can react to form ozone and other photochemically reactive pollutants. The emissions associated with use of consumer products were calculated based on defaults provided within CalEEMod.



LANDSCAPE MAINTENANCE EQUIPMENT

Landscape maintenance equipment would generate emissions from fuel combustion and evaporation of unburned fuel. Equipment in this category would include lawnmowers, shedders/grinders, blowers, trimmers, chain saws, and hedge trimmers used to maintain the landscaping of the Project. It should be noted that as October 9, 2021, Governor Gavin Newsom signed AB 1346. The bill aims to ban the sale of new gasoline-powered equipment under 25 gross horsepower (known as small off-road engines [SOREs]) by 2024. For purposes of analysis, the emissions associated with landscape maintenance equipment were calculated based on assumptions provided in CalEEMod.

3.5.2 ENERGY SOURCE EMISSIONS

COMBUSTION EMISSIONS ASSOCIATED WITH NATURAL GAS AND ELECTRICITY

Electricity and natural gas are used by almost every project. Criteria pollutant emissions are emitted through the generation of electricity and consumption of natural gas. However, because electrical generating facilities for the Project area are located either outside the region (state) or offset through the use of pollution credits (RECLAIM) for generation within the SCAB, criteria pollutant emissions from offsite generation of electricity are generally excluded from the evaluation of significance and only natural gas use is considered. The emissions associated with natural gas use were calculated using CalEEMod.

3.5.3 MOBILE SOURCE EMISSIONS

The Project related operational air quality emissions derive primarily from vehicle trips generated by the Project, including employee trips to and from the site and truck trips associated with the proposed uses. Trip characteristics available from the *Cottonwood & Edgemont Warehouse Trip Generation Assessment* were utilized in this analysis (34).

APPROACH FOR ANALYSIS OF THE PROJECT

In order to determine emissions from passenger car vehicles, the CalEEMod defaults were utilized for trip length and trip purpose for the proposed industrial land uses.

For the proposed industrial uses, it is important to note that although the *Cottonwood & Edgemont Warehouse Trip Generation Assessment* does not breakdown passenger cars by type, this analysis assumes that passenger cars include Light-Duty-Auto vehicles (LDA), Light-Duty-Trucks (LDT1⁴ & LDT2⁵), Medium-Duty-Vehicles (MDV), and Motorcycles (MCY) vehicle types. To account for emissions generated by passenger cars, the following fleet mix was utilized in this analysis:

_



⁴ Vehicles under the LDT1 category have a gross vehicle weight rating (GVWR) of less than 6,000 lbs. and equivalent test weight (ETW) of less than or equal to 3,750 lbs.

⁵ Vehicles under the LDT2 category have a GVWR of less than 6,000 lbs. and ETW between 3,751 lbs. and 5,750 lbs.

TABLE 3-6: PASSENGER CAR FLEET MIX

l and llee	% Vehicle Type					
Land Use	LDA	LDT1	LDT2	MDV	MCY	
General Light Industrial (90%)		6.030/	10 500/	15 100/	2.500/	
High-Cube Cold Storage (10%)	57.60%	6.03%	18.59%	15.19%	2.59%	

Note: The Project-specific passenger car fleet mix used in this analysis is based on a proportional split utilizing the default CalEEMod percentages assigned to LDA, LDT1, LDT2, and MDV vehicle types.

To determine emissions from trucks for the proposed industrial uses, the analysis incorporated the SCAQMD recommended truck trip length of 14.2 miles for 2-axle and 3-axle (LHDT1, LHDT2, and MHDT) trucks and 40 miles for 4+-axle (HHDT) trucks and weighting the average trip lengths using traffic trip percentages taken from the *Cottonwood & Edgemont Warehouse Trip Generation Assessment*. The trip length function for the high-cube fulfillment center and the business park uses has been revised 26.84 miles with an assumption of 100% primary trips for the proposed industrial land uses.

In order to be consistent with the *Cottonwood & Edgemont Warehouse Trip Generation Assessment*, trucks are broken down by truck type. The truck fleet mix is estimated by rationing the trip rates for each truck type based on information provided in the *Cottonwood & Edgemont Warehouse Trip Generation Assessment*. Heavy trucks are broken down by truck type (or axle type) and are categorized as either Light-Heavy-Duty Trucks (LHDT1⁶ & LHDT2⁷)/2-axle, Medium-Heavy-Duty Trucks (MHDT)/3-axle, and Heavy-Heavy-Duty Trucks (HHDT)/4+-axle. To account for emissions generated by trucks, the following fleet mix was utilized in this analysis:

TABLE 3-7: TRUCK FLEET MIX

Land Use	% Vehicle Type					
Land Ose	LHDT1	LHDT2	MHDT	HHDT		
General Light Industrial (90%)	13.08%	3.59%	25.00%	58.33%		
High-Cube Cold Storage (10%)	31.38%	8.62%	20.00%	40.00%		

Note: Project-specific truck fleet mix is based on the number of trips generated by each truck type (LHDT1, LHDT2, MHDT, and HHDT) relative to the total number of truck trips.

FUGITIVE DUST RELATED TO VEHICULAR TRAVEL

Vehicles traveling on paved roads would be a source of fugitive emissions due to the generation of road dust inclusive of break and tire wear particulates. The emissions estimate for travel on paved roads were calculated using CalEEMod.

-



 $^{^{6}}$ Vehicles under the LHDT1 category have a GVWR of 8,501 to 10,000 lbs.

⁷ Vehicles under the LHDT2 category have a GVWR of 10,001 to 14,000 lbs.

3.5.4 On-Site Cargo Handling Equipment Emissions

It is common for warehouse buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. For this particular Project, on-site modeled operational equipment includes up to two (2) 200 horsepower (hp), compressed natural gas or gasoline-powered tractors/loaders/backhoes operating at 4 hours a day⁸ for 365 days of the year.

3.5.5 TRU EMISSIONS

In order to account for the possibility of refrigerated uses, trucks associated with the cold-storage land use are assumed to also have TRUs. Therefore, for modeling purposes 5 trucks have the potential to include TRUs (approximately 30% of all trucks accessing the site). TRUs are accounted for during on-site and off-site travel. The TRU calculations are based on the 2017 Off-road Emissions model, version 1.0.1 (Orion), developed by the CARB. Orion does not provide emission rates per hour or mile as with the on-road emission model and only provides emission inventories. Emission results are produced in tons per day while all activity, fuel consumption and horsepower hours were reported at annual levels. The emission inventory is based on specific assumptions including the average horsepower rating of specific types of equipment and the hours of operation annually. These assumptions are not always consistent with assumptions used in the modeling of project level emissions. Therefore, the emissions inventory was converted into emission rates to accurately calculate emissions from TRU operation associated with project level details. This was accomplished by converting the annual horsepower hours to daily operational characteristics and converting the daily emission levels into hourly emission rates based on the total emission of each criteria pollutant by equipment type and the average daily hours of operation.

3.5.6 OPERATIONAL EMISSIONS SUMMARY

As previously stated, CalEEMod utilizes summer and winter EMFAC2017 emission factors in order to derive vehicle emissions associated with Project operational activities, which vary by season. The estimated operational-source emissions are summarized on Tables 3-8. Detailed operation model outputs for the Project are presented in Appendices 3.2 and 3.3. As shown on Table 3-8, the Project's daily regional emissions from on-going operations will not exceed any of the thresholds of significance.



⁸ Based on Table II-3, Port and Rail Cargo Handling Equipment Demographics by Type, from CARB's Technology Assessment: Mobile Cargo Handling Equipment document, a single piece of equipment could operate up to 2 hours per day (Total Average Annual Activity divided by Total Number Pieces of Equipment). As such, the analysis conservatively assumes that the tractor/loader/backhoe would operate up to 4 hours per day.

TABLE 3-8: SUMMARY OF PEAK OPERATIONAL EMISSIONS

			Emission	s (lbs/day)		
Source	voc	NOx	со	SOx	PM ₁₀	PM _{2.5}
		Summer				
Area Source	2.32	4.70E-04	0.05	0.00	1.90E-04	1.90E-04
Energy Source	0.10	0.92	0.77	5.50E-03	0.07	0.07
Mobile Source	1.69	4.35	18.71	0.06	4.82	1.33
TRU Source	0.04	0.49	0.61	1.17E-04	0.01	0.01
On-Site Equipment Source	0.22	2.07	1.50	6.33E-03	0.08	0.07
Total Maximum Daily Emissions	4.38	7.83	21.65	0.07	4.97	1.47
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO
		Winter				
Area Source	2.32	4.70E-04	0.05	0.00	1.90E-04	1.90E-04
Energy Source	0.10	0.92	0.77	5.50E-03	0.07	0.07
Mobile Source	1.47	4.61	16.36	0.05	4.82	1.33
TRU Source	0.04	0.49	0.61	1.17E-04	0.01	0.01
On-Site Equipment Source	0.22	2.07	1.50	6.33E-03	0.08	0.07
Total Maximum Daily Emissions	4.16	8.09	19.30	0.06	4.97	1.47
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

Source: CalEEMod operational-source emissions are presented in Appendices 3.2 and 3.3.

3.6 LOCALIZED SIGNIFICANCE

BACKGROUND ON LST DEVELOPMENT

The analysis makes use of methodology included in the SCAQMD Final Localized Significance Threshold Methodology (LST Methodology). The SCAQMD has established that impacts to air quality are significant if there is a potential to contribute or cause localized exceedances of the federal and/or state ambient air quality standards (NAAQS/CAAQS). Collectively, these are referred to as Localized Significance Thresholds (LSTs).

The SCAQMD established LSTs in response to the SCAQMD Governing Board's Environmental Justice Initiative I-4⁹. LSTs represent the maximum emissions from a project that would not cause

⁹ The purpose of SCAQMD's Environmental Justice program is to ensure that everyone has the right to equal protection from air pollution and fair access to the decision-making process that works to improve the quality of air within their communities. Further, the SCAQMD



14555-02 AQ Report

or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standard at the nearest residence or sensitive receptor. The SCAQMD states that lead agencies can use the LSTs as another indicator of significance in its air quality impact analyses.

LSTs were developed in response to environmental justice and health concerns raised by the public regarding exposure of individuals to criteria pollutants in local communities. To address the issue of localized significance, the SCAQMD adopted LSTs that show whether a project would cause or contribute to localized air quality impacts and thereby cause or contribute to potential localized adverse health effects. The analysis makes use of methodology included in the *LST Methodology* (35).

APPLICABILITY OF LSTS FOR THE PROJECT

For this Project, the appropriate SRA for the LST analysis is the SCAQMD Perris Valley (SRA 24). LSTs apply to CO, NO_2 , PM_{10} , and $PM_{2.5}$. The SCAQMD produced look-up tables for projects less than or equal to 5 acres in size.

In order to determine the appropriate methodology for determining localized impacts that could occur as a result of Project-related construction, the following process is undertaken:

- Identify the maximum daily on-site emissions that will occur during construction activity:
 - The maximum daily on-site emissions could be based on information provided by the Project Applicant; or
 - The SCAQMD's Fact Sheet for Applying CalEEMod to Localized Significance Thresholds and CalEEMod User's Guide Appendix A: Calculation Details for CalEEMod can be used to determine the maximum site acreage that is actively disturbed based on the construction equipment fleet and equipment hours as estimated in CalEEMod (36) (37).
- If the total acreage disturbed is less than or equal to 5 acres per day, then the SCAQMD's screening
 look-up tables are utilized to determine if a Project has the potential to result in a significant
 impact. The look-up tables establish a maximum daily emissions threshold in lbs/day that can be
 compared to CalEEMod outputs.
- If the total acreage disturbed is greater than 5 acres per day, then LST impacts may still be conservatively evaluated using the LST look-up tables for a 5-acre disturbance area. Use of the 5-acre disturbance area thresholds can be used to show that even if the daily emissions from all construction activity were emitted within a 5-acre area, and therefore concentrated over a smaller area which would result in greater site adjacent concentrations, the impacts would still be less than significant if the applicable 5-acre thresholds are utilized.
- The LST Methodology presents mass emission rates for each SRA, project sizes of 1, 2, and 5 acres, and nearest receptor distances of 25, 50, 100, 200, and 500 meters. For project sizes between the values given, or with receptors at distances between the given receptors, the methodology uses linear interpolation to determine the thresholds.

defines Environmental Justice as "...equitable environmental policymaking and enforcement to protect the health of all residents, regardless of age, culture, ethnicity, gender, race, socioeconomic status, or geographic location, from the health effects of air pollution."



EMISSIONS CONSIDERED

Based on SCAQMD's LST Methodology, emissions for concern during construction activities are on-site NO_X, CO, PM_{2.5}, and PM₁₀. The LST Methodology clearly states that "off-site mobile emissions from the Project should not be included in the emissions compared to LSTs (38)." As such, for purposes of the construction LST analysis, only emissions included in the CalEEMod "onsite" emissions outputs were considered.

MAXIMUM DAILY DISTURBED-ACREAGE

The "acres disturbed" for analytical purposes are based on specific equipment type for each subcategory of construction activity and the estimated maximum area a given piece of equipment can pass over in an 8-hour workday (as shown on Table 3-9). The equipment-specific grading rates are summarized in the SCAQMD's Fact Sheet for Applying CalEEMod to Localized Significance Thresholds and CalEEMod User's Guide Appendix A: Calculation Details for CalEEMod (36) (39). It The disturbed area per day is representative of a piece of equipment making multiple passes over the same land area. In other words, one Rubber Tired Dozer can make multiple passes over the same land area totaling 0.5 acres in a given 8-hour day. Based on Table 3-9, the Project's construction activities could actively disturb approximately 0.5 acres per day during site preparation and 5.0 acres per day during grading activities.

It should be noted that in CalEEMod, the Total Acres Graded (TAG) field represents the cumulative distance traversed on the property by the grading equipment. In order to properly grade a piece of land, multiple passes with grading equipment may be required. So even though the lot size is a fixed number of acres, the TAG could be an order of magnitude higher than the footprint of the lot (39). Total Acres Graded (TAG) is a function of the maximum acreage disturbed per day times the number of days of the subphase of construction. As such, the TAG field in CalEEMod has been revised to 20 acres (1.0¹⁰ acres per day x 2 days) for site preparation and 115 acres (5.0 acres per day x 23 days) for grading.¹¹

TABLE 3-9: MAXIMUM DAILY DISTURBED-ACREAGE

Construction Activity	Equipment Type	Equipment Quantity	Acres graded per 8-hour day	Operating Hours per Day	Acres graded per day	
Site Preparation	Tractors	1	0.5	8	2.0	
Total acres disturbed	Total acres disturbed per day during Site Preparation					
	Rubber Tired Dozers	1	0.5	8	0.5	
Grading	Scrapers	4	1.0	8	4.0	
	Tractors	1	0.5	8	0.5	
Total acres disturbed	5.0					

 $^{^{10}}$ In order to use linear regression to determine localized significance thresholds, this analysis assumes that up to 1 acre can be disturbed during site preparation activities.

. .



¹¹ CalEEMod does not provide a "Total Acres Graded" field for Demolition, Building Construction, Paving, or Architectural Coating activities.

RECEPTORS

As previously stated, LSTs represent the maximum emissions from a project that would not cause or contribute to an exceedance of the most stringent applicable NAAQS and CAAQS at the nearest residence or sensitive receptor. Receptor locations are off-site locations where individuals may be exposed to emissions from Project activities.

Some people are especially sensitive to air pollution and are given special consideration when evaluating air quality impacts from projects. These groups of people include children, the elderly, and individuals with pre-existing respiratory or cardiovascular illness. Structures that house these persons or places where they gather are defined as "sensitive receptors". These structures typically include uses such as residences, hotels, and hospitals where an individual can remain for 24 hours. Consistent with the LST Methodology, the nearest land use where an individual could remain for 24 hours to the Project site (in this case the West Valley Detention Center) has been used to determine construction and operational air quality impacts for emissions of PM_{10} and $PM_{2.5}$, since PM_{10} and $PM_{2.5}$ thresholds are based on a 24-hour averaging time.

LSTs apply, even for non-sensitive land uses, consistent with *LST Methodology* and SCAQMD guidance. Per the *LST Methodology*, commercial and industrial facilities are not included in the definition of sensitive receptor because employees and patrons do not typically remain onsite for a full 24 hours but are typically onsite for 8 hours or less. However, *LST Methodology* explicitly states that "*LSTs based on shorter averaging periods, such as the NO2 and CO LSTs, could also be applied to receptors such as industrial or commercial facilities since it is reasonable to assume that a worker at these sites could be present for periods of one to eight hours (38)." Therefore, any adjacent land use where an individual could remain for 1 or 8-hours, that is located at a closer distance to the Project site than the receptor used for PM₁₀ and PM_{2.5} analysis, must be considered to determine construction and operational LST air impacts for emissions of NO₂ and CO since these pollutants have an averaging time of 1 and 8-hours.*

RECEPTORS

Receptors in the relative to Project area are described below and shown on Exhibit 3-A. Localized air quality impacts were evaluated at receptor land uses nearest the Project site. All distances are measured from the Project site boundary to the outdoor living areas (e.g., backyards) or at the building façade, whichever is closer to the Project site.

- R1: Location R1 represents existing residence at 21717 Cottonwood Avenue, approximately 17 feet north of the Project site. R1 is placed in the private outdoor living areas (backyard) facing the Project site.
- R2: Location R2 represents the existing residence at 13561 Cottonwood Avenue, approximately 19 feet east of the Project site. R2 is placed in the private outdoor living areas (backyard) facing the Project site.
- R3: Location R3 represents the existing residence at 13571 Cottonwood Avenue, approximately 19 feet east of the Project site. R3 is placed in the private outdoor living areas (backyard) facing the Project site.



- R4: Location R4 represents the Liberty Church at 12079 Nita Drive, approximately 107 feet east of the Project site. Since there are no private outdoor living areas (backyards) facing the Project site, receptor R4 is placed at the building façade.
- R5: Location R5 represents the existing residence at 13651 Edgemont Street, approximately 135 feet south of the Project site. R5 is placed in the private outdoor living areas (backyard) facing the Project site.
- R6: Location R6 represents the existing residence at 13676 Old 215 Frontage Road, approximately 22 feet south of the Project site. R6 is placed in the private outdoor living areas (backyard) facing the Project site.
- R7: Location R7 represents the existing residence at 21613 Cottonwood Avenue, approximately 128 feet northwest of the Project site. R7 is placed in the private outdoor living areas (backyard) facing the Project site.

The SCAQMD recommends that the nearest sensitive receptor be considered when determining the Project's potential to cause an individual a cumulatively significant impact. The nearest land use where an individual could remain for 24 hours to the Project site has been used to determine localized construction and operational air quality impacts for emissions of PM_{10} and $PM_{2.5}$ (since PM_{10} and $PM_{2.5}$ thresholds are based on a 24-hour averaging time). The nearest receptor used for evaluation of localized impacts of PM_{10} and $PM_{2.5}$ is represented by location R1 which represents the existing residence at 21717 Cottonwood Avenue, approximately 17 feet/5 meters north of the Project site.

As previously stated, and consistent with LST Methodology, the nearest industrial/commercial use to the Project site is used to determine construction and operational LST air impacts for emissions of NO_X and CO as the averaging periods for these pollutants are shorter (8 hours or less) and it is reasonable to assumed that an individual could be present at these sites for periods of one to 8 hours. It should be noted that as there are no industrial/commercial uses located at a closer distance than the nearest residential use, the same receptors will be used for evaluation of localized NO_X and CO.

It should be noted that the LST Methodology explicitly states that "It is possible that a project may have receptors closer than 25 meters. Projects with boundaries located closer than 25 meters to the nearest receptor should use the LSTs for receptors located at 25 meters (40)." As such a 25-meter receptor distance will be used for evaluation of localized PM₁₀, PM_{2.5}, NO₂, and CO.



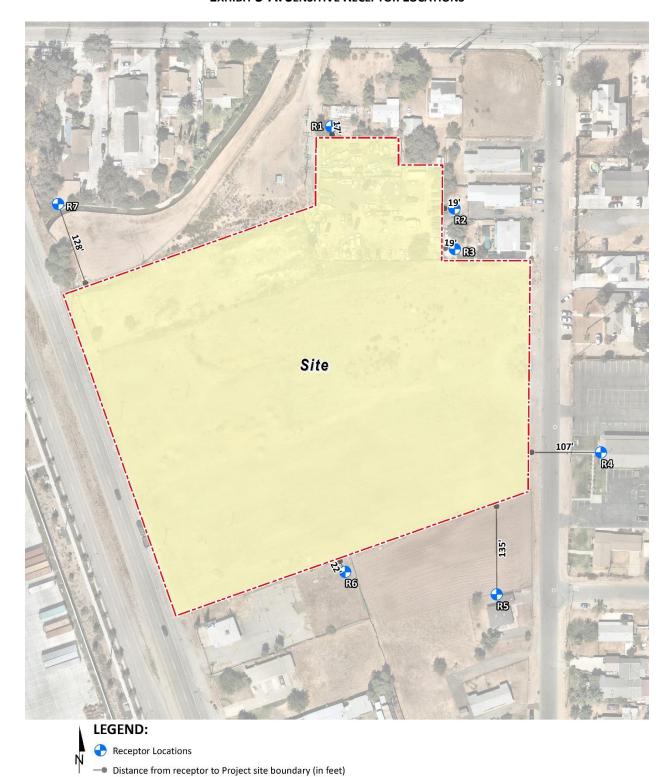


EXHIBIT 3-A: SENSITIVE RECEPTOR LOCATIONS



3.7 CONSTRUCTION-SOURCE EMISSIONS LST ANALYSIS

3.7.1 LOCALIZED THRESHOLDS FOR CONSTRUCTION ACTIVITY

Since the total acreage disturbed is less than five acres per day for site preparation and 5 acres per day for grading activities, the SCAQMD's screening look-up tables are utilized in determining impacts. It should be noted that since the look-up tables identify thresholds at only 1 acre, 2 acres, and 5 acres, in order to use linear regression to determine localized significance thresholds, this analysis assumes that up to 1 acre can be disturbed during demolition activities. Consistent with SCAQMD guidance, the thresholds presented in Table 3-10 were calculated by interpolating the threshold values for the Project's disturbed acreage.

TABLE 3-10: MAXIMUM DAILY LOCALIZED CONSTRUCTION EMISSIONS THRESHOLDS

Comptunition Activity	Construction Localized Thresholds					
Construction Activity	NOx	со	PM ₁₀	PM ₁₀		
Site Preparation	118 lbs/day	602 lbs/day	4 lbs/day	3 lbs/day		
Grading	270 lbs/day	1,577 lbs/day	13 lbs/day	8 lbs/day		

Source: Localized Thresholds presented in this table are based on the SCAQMD Final LST Methodology, July 2008

3.7.2 CONSTRUCTION-SOURCE LOCALIZED EMISSIONS

Table 3-11 identifies the localized impacts at the nearest receptor location in the vicinity of the Project. Localized construction emissions would not exceed the applicable SCAQMD LSTs for emissions of any criterial pollutant. For analytical purposes, emissions associated with peak site preparation and grading activities are considered for purposes of LSTs since these phases represents the maximum localized emissions that would occur. Any other construction phases of development that overlap would result in lesser emissions and consequently lesser impacts than what is disclosed herein.

TABLE 3-11: LOCALIZED CONSTRUCTION-SOURCE EMISSIONS

Construction	Year		Emissions	(lbs/day)	
Activity	Tear	NOx	со	PM ₁₀	PM _{2.5}
	2022	2.40	3.62	0.52	0.14
Sita Branaration	Maximum Daily Emissions	2.40	3.62	0.52	0.14
Site Preparation	SCAQMD Localized Threshold	118	602	4	3
	Threshold Exceeded?	NO	NO	NO	NO
	2022	45.36	33.97	6.32	3.25
Cradina	Maximum Daily Emissions	45.36	33.97	6.32	3.25
Grading	SCAQMD Localized Threshold	270	1,577	13	8
	Threshold Exceeded?	NO	NO	NO	NO



3.8 OPERATIONAL-SOURCE EMISSIONS LST ANALYSIS

The Project is located on an approximately 7.94-acre parcel. As noted previously, the *LST Methodology* provides look-up tables for sites with an area with daily disturbance of 5 acres or less. For projects that exceed 5 acres, the 5-acre LST look-up tables can be used as a screening tool to determine whether pollutants require additional detailed analysis. This approach is conservative as it assumes that all on-site emissions associated with the project would occur within a concentrated 5-acre area. This screening method would therefore over-predict potential localized impacts, because by assuming that on-site operational activities are occurring over a smaller area, the resulting concentrations of air pollutants are more highly concentrated once they reach the smaller site boundary than they would be for activities if they were spread out over a larger surface area. On a larger site, the same amount of air pollutants generated would disperse over a larger surface area and would result in a lower concentration once emissions reach the project-site boundary. As such, LSTs for a 5-acre site during operations are used as a screening tool to determine if further detailed analysis is required.

The LST analysis generally includes on-site sources (area, energy, mobile, and on-site cargo handling equipment – are previously discussed in Section 3.5 of this report). However, it should be noted that the CalEEMod outputs do not separate on-site and off-site emissions from mobile sources. As such, in an effort to establish a maximum potential impact scenario for analytic purposes, the emissions shown on Table 3-13 represent all on-site Project-related stationary (area) sources and 5% of the Project-related mobile sources. Considering that the trip length used in CalEEMod for the Project is approximately 16.6 miles for passenger cars and 40.0 miles for all trucks, 5% of this total would represent an on-site travel distance of approximately 0.8 mile/4,382 feet for passenger cars and 2 miles/10,560 feet for trucks. It should be noted that the longest on-site distance is roughly 0.3 miles for both trucks and passenger cars. As such, the 5% assumption is conservative and would tend to overstate the actual impact because it is not likely that a passenger car would drive 0.8 mile on the site or that a truck would drive 2 miles on the site. Modeling based on these assumptions demonstrates that even within broad encompassing parameters, Project operational-source emissions would not exceed applicable LSTs.

3.8.1 LOCALIZED THRESHOLDS FOR OPERATIONAL ACTIVITY

As previously stated, LSTs for a 5-acre site during operations are used as a screening tool to determine if further detailed analysis is required.

TABLE 3-12: MAXIMUM DAILY LOCAL IZED OPERATIONAL EMISSIONS THRESHOLDS

Operational Localized Thresholds				
NO _X CO PM ₁₀ PM ₁₀				
270 lbs/day	1,577 lbs/day	4 lbs/day	2 lbs/day	

Source: Localized Thresholds presented in this table are based on the SCAQMD Final LST Methodology, July 2008



3.8.2 OPERATIONAL-SOURCE LOCALIZED EMISSIONS

As shown on Table 3-13 operational emissions would not exceed the LST thresholds for the nearest sensitive receptor. Therefore, the Project would have a less than significant localized impact during operational activity.

TABLE 3-13: LOCALIZED SIGNIFICANCE SUMMARY OF OPERATIONS

Scenario	Emissions (lbs/day)				
	NOx	со	PM ₁₀	PM _{2.5}	
Summer	3.23	3.29	0.39	0.21	
Winter	3.24	3.17	0.39	0.21	
Maximum Daily Emissions	3.24	3.29	0.39	0.21	
SCAQMD Localized Threshold	270	1,577	4	2	
Threshold Exceeded?	NO	NO	NO	NO	

Source: CalEEMod localized operational-source emissions are presented in Appendices 3.2 and 3.3.

3.9 CO "HOT SPOT" ANALYSIS

As discussed below, the Project would not result in potentially adverse CO concentrations or "hot spots." Further, detailed modeling of Project-specific CO "hot spots" is not needed to reach this conclusion. An adverse CO concentration, known as a "hot spot", would occur if an exceedance of the state one-hour standard of 20 ppm or the eight-hour standard of 9 ppm were to occur.

It has long been recognized that CO hotspots are caused by vehicular emissions, primarily when idling at congested intersections. In response, vehicle emissions standards have become increasingly stringent in the last twenty years. Currently, the allowable CO emissions standard in California is a maximum of 3.4 grams/mile for passenger cars (there are requirements for certain vehicles that are more stringent). With the turnover of older vehicles, introduction of cleaner fuels, and implementation of increasingly sophisticated and efficient emissions control technologies, CO concentration in the SCAB is now designated as attainment.

To establish a more accurate record of baseline CO concentrations affecting the SCAB, a CO "hot spot" analysis was conducted in 2003 for four busy intersections in Los Angeles at the peak morning and afternoon time periods. This "hot spot" analysis did not predict any violation of CO standards, as shown on Table 3-14.



TABLE 3-14: CO MODEL RESULTS

Intersection Location	CO Concentrations (ppm)			
	Morning 1-hour	Afternoon 1-hour	8-hour	
Wilshire Boulevard/Veteran Avenue	4.6	3.5	3.7	
Sunset Boulevard/Highland Avenue	4	4.5	3.5	
La Cienega Boulevard/Century Boulevard	3.7	3.1	5.2	
Long Beach Boulevard/Imperial Highway	3	3.1	8.4	

Source: 2003 AQMP, Appendix V: Modeling and Attainment Demonstrations

Notes: Federal 1-hour standard is 35 ppm and the deferral 8-hour standard is 9.0 ppm.

Based on the SCAQMD's 2003 AQMP and the 1992 Federal Attainment Plan for Carbon Monoxide (1992 CO Plan), peak carbon monoxide concentrations in the SCAB were a result of unusual meteorological and topographical conditions and not a result of traffic volumes and congestion at a particular intersection. As evidence of this, for example, 8.4 ppm 8-hr CO concentration measured at the Long Beach Blvd. and Imperial Hwy. intersection (highest CO generating intersection within the "hot spot" analysis), only 0.7 ppm was attributable to the traffic volumes and congestion at this intersection; the remaining 7.7 ppm were due to the ambient air measurements at the time the 2003 AQMP was prepared (41). In contrast, an adverse CO concentration, known as a "hot spot", would occur if an exceedance of the state one-hour standard of 20 parts per million (ppm) or the eight-hour standard of 9 ppm were to occur.

The ambient 1-hr and 8-hr CO concentration within the Project study area is estimated to be 1.9 ppm and 1.4 ppm, respectively (data from Perris Valley station for 2020). Therefore, even if the traffic volumes for the proposed Project were double or even triple of the traffic volumes generated at the Long Beach Blvd. and Imperial Hwy. intersection, coupled with the on-going improvements in ambient air quality, the Project would not be capable of resulting in a CO "hot spot" at any study area intersections.

Similar considerations are also employed by other Air Districts when evaluating potential CO concentration impacts. More specifically, the Bay Area Air Quality Management District (BAAQMD) concludes that under existing and future vehicle emission rates, a given project would have to increase traffic volumes at a single intersection by more than 44,000 vehicles per hour (vph)—or 24,000 vph where vertical and/or horizontal air does not mix—in order to generate a significant CO impact (42). Traffic volumes generating the CO concentrations for the "hot spot" analysis is shown on Table 3-15. The busiest intersection evaluated was that at Wilshire Boulevard and Veteran Avenue, which has a daily traffic volume of approximately 100,000 vph and AM/PM traffic volumes of 8,062 vph and 7,719 vph respectively (41). The 2003 AQMP estimated that the 1-hour concentration for this intersection was 4.6 ppm; this indicates that, should the daily traffic volume increase four times to 400,000 vehicles per day, CO concentrations (4.6 ppm x 4= 18.4 ppm) would still not likely exceed the most stringent 1-hour CO standard (20.0 ppm)¹².



 $^{^{12}}$ Based on the ratio of the CO standard (20.0 ppm) and the modeled value (4.6 ppm)

TABLE 3-15: TRAFFIC VOLUMES

	Peak Traffic Volumes (vph)				
Intersection Location	Eastbound (AM/PM)	Westbound (AM/PM)	Southbound (AM/PM)	Northbound (AM/PM)	Total (AM/PM)
Wilshire Boulevard/Veteran Avenue	4,954/2,069	1,830/3,317	721/1,400	560/933	8,062/7,719
Sunset Boulevard/Highland Avenue	1,417/1,764	1,342/1,540	2,304/1,832	1,551/2,238	6,614/5,374
La Cienega Boulevard/Century Boulevard	2,540/2,243	1,890/2,728	1,384/2,029	821/1,674	6,634/8,674
Long Beach Boulevard/Imperial Highway	1,217/2,020	1,760/1,400	479/944	756/1,150	4,212/5,514

Source: 2003 AQMP

3.10 AQMP

The Project site is located within the SCAB, which is characterized by relatively poor air quality. The SCAQMD has jurisdiction over an approximately 10,743 square-mile area consisting of the four-county Basin and the Los Angeles County and Riverside County portions of what use to be referred to as the Southeast Desert Air Basin. In these areas, the SCAQMD is principally responsible for air pollution control, and works directly with the SCAG, county transportation commissions, local governments, as well as state and federal agencies to reduce emissions from stationary, mobile, and indirect sources to meet state and federal ambient air quality standards.

Currently, these state and federal air quality standards are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMPs to meet the state and federal ambient air quality standards. AQMPs are updated regularly to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy.

In March 2017, the SCAQMD released the *Final 2016 AQMP* (2016 AQMP). The 2016 AQMP continues to evaluate current integrated strategies and control measures to meet the NAAQS, as well as explore new and innovative methods to reach its goals. Some of these approaches include utilizing incentive programs, recognizing existing co-benefit programs from other sectors, and developing a strategy with fair-share reductions at the federal, state, and local levels (43). Similar to the 2012 AQMP, the 2016 AQMP incorporates scientific and technological information and planning assumptions, including the 2016-2040 RTP/SCS, a planning document that supports the integration of land use and transportation to help the region meet the federal CAA requirements (17). The Project's consistency with the AQMP will be determined using the 2016 AQMP as discussed below.

Criteria for determining consistency with the AQMP are defined in Chapter 12, Section 12.2 and Section 12.3 of the 1993 CEQA Handbook (44). These indicators are discussed below:



3.10.1 Consistency Criterion No. 1

The proposed Project will not result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations or delay the timely attainment of air quality standards or the interim emissions reductions specified in the AQMP.

The violations that Consistency Criterion No. 1 refers to are the CAAQS and NAAQS. CAAQS and NAAQS violations would occur if regional or localized significance thresholds were exceeded.

Construction Impacts - Consistency Criterion 1

Consistency Criterion No. 1 refers to violations of the CAAQS and NAAQS. CAAQS and NAAQS violations would occur if LSTs or regional significance thresholds were exceeded. As evaluated, the Project's regional and localized construction-source emissions would not exceed applicable regional significance threshold and LST thresholds. As such, a less than significant impact is expected.

Operational Impacts - Consistency Criterion 1

As evaluated, the Project would not exceed the applicable regional and localized significance thresholds for operational activity. Therefore, the Project would not conflict with the AQMP according to this criterion.

On the basis of the preceding discussion, the Project is determined to be consistent with the first criterion.

3.10.2 CONSISTENCY CRITERION NO. 2

The Project will not exceed the assumptions in the AQMP based on the years of Project buildout phase.

The 2016 AQMP demonstrates that the applicable ambient air quality standards can be achieved within the timeframes required under federal law. Growth projections from local general plans adopted by cities in the district are provided to the SCAG, which develops regional growth forecasts, which are then used to develop future air quality forecasts for the AQMP. Development consistent with the growth projections in City of Moreno Valley General Plan is considered to be consistent with the AQMP.

Construction Impacts – Consistency Criterion 2

Peak day emissions generated by construction activities are largely independent of land use assignments, but rather are a function of development scope and maximum area of disturbance. Irrespective of the site's land use designation, development of the site to its maximum potential would likely occur, with disturbance of the entire site occurring during construction activities. As such, when considering that no emissions thresholds will be exceeded, a less than significant impact would result.



Operational Impacts – Consistency Criterion 2

The City of Moreno Valley adopted the City of Moreno Valley General Plan 2040 on June 15, 2021. Per the General Plan, the Project site is designated for Business Park/Industrial land uses. As described in the General Plan, "[t]he primary purpose of areas designated Business Park/Industrial is to provide for manufacturing, research and development, warehousing and distribution, as well as office and support commercial activities. The zoning regulations shall identify the particular uses permitted on each parcel of land. Development intensity should not exceed a Floor Area Ratio [FAR] of 1.00 and the average floor area ratio should be significantly less . . ." (45).

The proposed Project will consist of two 49,815 sf warehouse buildings for a total of 99,630 sf. As such, the Project's industrial uses are consistent with uses allowed under the Business Park/Light Industrial General Plan Land Use designation. The Project FAR (0.51) is consistent with and would not exceed the General Plan FAR (1.0) established for the Business Park/Light Industrial General Plan Land Use designation. Furthermore, the Project, as evaluated herein would not exceed the regional or localized air quality significance thresholds.

On the basis of the preceding discussion, the Project is determined to be consistent with the second criterion.

AQMP CONSISTENCY CONCLUSION

The Project would not have the potential to result in or cause NAAQS or CAAQS violations. Additionally, Project construction and operational-source emissions would not exceed the regional or localized significance thresholds. The Project is therefore considered to be consistent with the AQMP.

3.11 POTENTIAL IMPACTS TO SENSITIVE RECEPTORS

The potential impact of Project-generated air pollutant emissions at sensitive receptors has also been considered. Results of the LST analysis indicate that the Project will not exceed the SCAQMD localized significance thresholds during construction. Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations during Project construction.

Additionally, the Project will not exceed the SCAQMD localized significance thresholds during operational activity. Further Project traffic would not create or result in a CO "hotspot." Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations as the result of Project operations.

3.11.1 FRIANT RANCH CASE

In December 2018, in the case of *Sierra Club v. County of Fresno* (2018) 6 Cal.5th 502, the California Supreme Court held that an EIR air quality analysis must meaningfully connect the identified air quality impacts to the human health consequences of those impacts, or meaningfully explain why that analysis cannot be provided.

As discussed in briefs filed in the Friant Ranch case, correlating a project's criteria air pollutant emissions to specific health impacts is challenging. The SCAQMD, which has among the most



sophisticated air quality modeling and health impact evaluation capability of any of the air districts in the State, and thus it is uniquely situated to express an opinion on how lead agencies should correlate air quality impacts with specific health outcomes (46) noted that it may be "difficult to quantify health impacts for criteria pollutants." SCAQMD used O₃ as an example of why it is impracticable to determine specific health outcomes from criteria pollutants for all but very large, regional-scale projects. First, forming O₃ "takes time and the influence of meteorological conditions for these reactions to occur, so ozone may be formed at a distance downwind from the sources." (SCAQMD, 2015a, p. 11) Second, "it takes a large amount of additional precursor emissions (NO_X and VOCs) to cause a modeled increase in ambient ozone levels over an entire region," with a 2012 study showing that "reducing NO_X by 432 tons per day (157,680 tons/year) and reducing VOC by 187 tons per day (68,255 tons/year) would reduce ozone levels at the SCAQMD's monitor site with the highest levels by only 9 parts per billion." (SCAQMD, 2015a, pp. 12-14)

SCAQMD concluded that it "does not currently know of a way to accurately quantify ozonerelated health impacts caused by NO_X or VOC emissions from relatively small projects." (SCAQMD, 2015a, pp. 12-14) The San Joaquin Valley Unified Air Pollution Control District (SJVUAPCD) ties the difficulty of correlating the emission of criteria pollutants to health impacts to how ozone and particulate matter are formed, stating that "[b]ecause of the complexity of ozone formation, a specific tonnage amount of NO_X or VOCs emitted in a particular area does not equate to a particular concentration of ozone in that area." (SJVUAPCD, 2015, p. 4) Similarly, the tonnage of PM "emitted does not always equate to the local PM concentration because it can be transported long distances by wind," and "[s]econdary PM, like ozone, is formed via complex chemical reactions in the atmosphere between precursor chemicals such as sulfur dioxides (SO_X) and NO_x," meaning that "the tonnage of PM-forming precursor emissions in an area does not necessarily result in an equivalent concentration of secondary PM in that area." (SJVUAPCD, 2015, p. 5) The disconnect between the amount of precursor pollutants and the concentration of ozone or PM formed makes it difficult to determine potential health impacts, which are related to the concentration of ozone and PM experienced by the receptor rather than levels of NO_X, SO_X , and VOCs produced by a source.

Most local agencies lack the data to do their own assessment of potential health impacts from criteria air pollutant emissions, as would be required to establish customized, locally specific thresholds of significance based on potential health impacts from an individual development project. The use of national or "generic" data to fill the gap of missing local data would not yield accurate results because such data does not capture local air patterns, local background conditions, or local population characteristics, all of which play a role in how a population experiences air pollution. Because it is impracticable to accurately isolate the exact cause of a human disease (for example, the role a particular air pollutant plays compared to the role of other allergens and genetics in cause asthma), existing scientific tools cannot accurately estimate health impacts of the Project's air emissions without undue speculation. Instead, readers are directed to the Project's air quality impact analysis above, which provides extensive information concerning the quantifiable and non-quantifiable health risks related to the Project's construction and long-term operation.



The LST analysis above determined that the Project would not result in emissions exceeding SCAQMD's LSTs. Therefore, the proposed Project would not be expected to exceed the most stringent applicable federal or state ambient air quality standards for emissions of CO, NO_X, PM₁₀, and PM_{2.5}

As the Project's emissions will comply with federal, state, and local air quality standards, the proposed Project's emissions are not sufficiently high enough to use a regional modeling program to correlate health effects on a basin-wide level and would not provide a reliable indicator of health effects if modeled.

3.12 ODORS

The potential for the Project to generate objectionable odors has also been considered. Land uses generally associated with odor complaints include:

- Agricultural uses (livestock and farming)
- Wastewater treatment plants
- Food processing plants
- Chemical plants
- Composting operations
- Refineries
- Landfills
- Dairies
- Fiberglass molding facilities

The Project does not contain land uses typically associated with emitting objectionable odors. Potential odor sources associated with the proposed Project may result from construction equipment exhaust and the application of asphalt and architectural coatings during construction activities and the temporary storage of typical solid waste (refuse) associated with the proposed Project's (long-term operational) uses. Standard construction requirements would minimize odor impacts from construction. The construction odor emissions would be temporary, short-term, and intermittent in nature and would cease upon completion of the respective phase of construction and is thus considered less than significant. It is expected that Project-generated refuse would be stored in covered containers and removed at regular intervals in compliance with the solid waste regulations. The proposed Project would also be required to comply with SCAQMD Rule 402 to prevent occurrences of public nuisances. Therefore, odors associated with the proposed Project construction and operations would be less than significant and no mitigation is required (47).

3.13 CUMULATIVE IMPACTS

As previously shown in Table 2-3, the CAAQS designate the Project site as nonattainment for O_3 PM₁₀, and PM_{2.5} while the NAAQS designates the Project site as nonattainment for O_3 and PM_{2.5}.



The SCAQMD has published a report on how to address cumulative impacts from air pollution: White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution (48). In this report the SCAQMD clearly states (Page D-3):

"...the SCAQMD uses the same significance thresholds for project specific and cumulative impacts for all environmental topics analyzed in an Environmental Assessment or EIR. The only case where the significance thresholds for project specific and cumulative impacts differ is the Hazard Index (HI) significance threshold for TAC emissions. The project specific (project increment) significance threshold is HI > 1.0 while the cumulative (facility-wide) is HI > 3.0. It should be noted that the HI is only one of three TAC emission significance thresholds considered (when applicable) in a CEQA analysis. The other two are the maximum individual cancer risk (MICR) and the cancer burden, both of which use the same significance thresholds (MICR of 10 in 1 million and cancer burden of 0.5) for project specific and cumulative impacts.

Projects that exceed the project-specific significance thresholds are considered by the SCAQMD to be cumulatively considerable. This is the reason project-specific and cumulative significance thresholds are the same. Conversely, projects that do not exceed the project-specific thresholds are generally not considered to be cumulatively significant."

Therefore, this analysis assumes that individual projects that do not generate operational or construction emissions that exceed the SCAQMD's recommended daily thresholds for project-specific impacts would also not cause a cumulatively considerable increase in emissions for those pollutants for which SCAB is in nonattainment, and, therefore, would not be considered to have a significant, adverse air quality impact. Alternatively, individual project-related construction and operational emissions that exceed SCAQMD thresholds for project-specific impacts would be considered cumulatively considerable.

CONSTRUCTION IMPACTS

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that proposed Project construction-source air pollutant emissions would not result in exceedances of regional thresholds. Therefore, proposed Project construction-source emissions would be considered less than significant on a project-specific and cumulative basis.

OPERATIONAL IMPACTS

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that proposed Project operational-source air pollutant emissions would not result in exceedances of regional thresholds. Therefore, proposed Project operational-source emissions would be considered less than significant on a project-specific and cumulative basis.



This page intentionally left blank



4 REFERENCES

- 1. State of California. 2020 CEQA California Environmental Quality Act. 2020.
- 2. **South Coast Air Quality Management District.** RULE 403. FUGITIVE DUST. [Online] https://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-403.pdf?sfvrsn=4.
- 3. —. RULE 1113. Architectural Coatings. [Online] http://www.aqmd.gov/docs/default-source/rule-book/reg-xi/r1113.pdf.
- 4. —. Southern California Air Basins. [Online] https://www.arb.ca.gov/msprog/onroad/porttruck/maps/scabc7map.pdf.
- 5. —. Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning. 2005.
- 6. **St. Croix Sensory, Inc.** *The "Gray Line" Between Odor Nuisance and Health Effects.* 2000.
- 7. **California Air Resources Board.** Ambient Air Quality Standards (AAQS). [Online] 2016. http://www.arb.ca.gov/research/aaqs/aaqs2.pdf.
- 8. **United State Environmental Protection Agency.** Frequent Questions about General Conformity . *EPA.* [Online] https://www.epa.gov/general-conformity/frequent-questions-about-general-conformity#8.
- 9. **South Coast Air Quality Management District.** Annual Air Quality Monitoring Network Plan. [Online] July 2018. http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-monitoring-network-plan/annual-air-quality-monitoring-network-plan-v2.pdf?sfvrsn=2.
- 10. **Air Resources Board.** State and National Ambient Air Quality Standards. [Online] https://www.arb.ca.gov/regact/2019/stateareadesignations/appc.pdf?_ga=2.169398369.15376157 02.1554741141-1192937971.1505156621.
- 11. **District, South Coast Air Quality Management.** Air Quality Data Tables. [Online] https://www.aqmd.gov/home/air-quality/air-quality-data-studies/historical-data-by-year.
- 12. **Environmental Protection Agency.** National Ambient Air Quality Standards (NAAQS). [Online] 1990. https://www.epa.gov/environmental-topics/air-topics.
- 13. —. Air Pollution and the Clean Air Act. [Online] http://www.epa.gov/air/caa/.
- 14. **United States Environmental Protection Agency.** 1990 Clean Air Act Amendment Summary: Title I. [Online] https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-i.
- 15. —. 1990 Clean Air Act Amendment Summary: Title II. [Online] https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-ii.
- 16. **Air Resources Board.** California Ambient Air Quality Standards (CAAQS). [Online] 2009. [Cited: April 16, 2018.] http://www.arb.ca.gov/research/aaqs/caaqs/caaqs.htm.
- 17. **Southern California Association of Governments.** 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy. [Online] April 2016. http://scagrtpscs.net/Documents/2016/final/f2016RTPSCS.pdf.
- 18. South Coast Air Quality Management District. Air Quality Management Plan. 2012.
- 19. California Air Resources Board. The California Almanac of Emissions and Air Quality. 2013.
- 20. **South Coast AQMD.** South Coast Air Basin Ozone Trend. [Online] https://www.aqmd.gov/home/air-quality/historical-air-quality-data/historic-ozone-air-quality-trends.



- 21. **California Air Resources Board.** iADAM: Air Quality Data Statistics. *California Air Resources Board.* [Online] https://arb.ca.gov/adam/topfour/topfour1.php.
- 22. **Environmental Protection Agency.** Approval and Promulgation of Implementation Plans; California; South Coast Serious Area Plan for the 2006 PM2.5. [Online] 2019. https://www.federalregister.gov/documents/2019/02/12/2019-01922/approval-and-promulgation-of-implementation-plans-california-south-coast-serious-area-plan-for-the.
- 23. **South Coast Air Quality Management District.** Final 2016 Air Quality Management Plan. *South Coast Air Quality Management District.* [Online] March 2017. http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016-aqmp/final2016aqmp.pdf.
- 24. South coast Air Quality Management District. CEQA Air Quality Handbook (1993). 1993.
- 25. **California Environmental Protection Agency Air Resources Board.** Nitrogen Dioxide- Overview. [Online] http://www.arb.ca.gov/research/aaqs/caaqs/no2-1/no2-1.htm.
- 26. Ralph Propper, Patrick Wong, Son Bui, Jeff Austin, William Vance, Alvaro Alvarado, Bart Croes, and Dongmin Luo. Ambient and Emission Trends of Toxic Air Contaminants in California. *American Chemical Society: Environmental Science & Technology.* 2015.
- 27. **Air Resources Board.** ARB's Drayage Truck Regulatory Activities. [Online] http://www.arb.ca.gov/msprog/onroad/porttruck/porttruck.htm.
- 28. —. Truck and Bus Regulation. *On-Road Heavy-Duty Diesel Vehicles (In-Use) Regulation*. [Online] http://www.arb.ca.gov/msprog/onrdiesel/onrdiesel.htm.
- 29. **The Port of Los Angeles.** Clean Truck Program. [Online] http://www.portoflosangeles.org/ctp/idx ctp.asp.
- 30. **South Coast Air Quality Management District.** Transfer Funds, Appropriate Funding, Execute Purchase Orders, Execute Contrat and Authorize Release of RFQs for the Fifth Multiple Air Toxics Exposure Study. *South Coast Air Quality Management District.* [Online] 2017. http://www.aqmd.gov/docs/default-source/Agendas/Governing-Board/2017/2017-jul7-009.pdf?sfvrsn=7.
- 31. —. Executive Summary. *MATES V Draft Report*. [Online] 2021. http://www.aqmd.gov/docs/default-source/planning/mates-v/draft-mates-v-executive-summary_v2.pdf?sfvrsn=6.
- 32. **South Coast Air Quality Management District (SCAQMD).** SCAQMD Air Quality Significance Thresholds. [Online] http://www.aqmd.gov/docs/default-source/ceqa/handbook/scaqmd-air-quality-significance-thresholds.pdf?sfvrsn=2.
- 33. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] September 2016. www.caleemod.com.
- 34. **Urban Crossroads, Inc.** *Cottonwood & Edgemont Warehouse Trip Generation Assessment.* 2022.
- 35. **Lake Environmental.** US EPA Models. *Lake Environmental.* [Online] http://www.weblakes.com/download/us_epa.html.
- 36. **South Coast Air Quality Management District.** Fact Sheet for Applying CalEEMod to Localized Significance Thresholds. [Online] http://www.aqmd.gov/docs/default-source/ceqa/handbook/localized-significance-thresholds/caleemod-guidance.pdf.
- 37. **California Air Pollution Control Officers Association (CAPCOA).** Appendix A: Calculation Details for CalEEMod. *CalEEMod.* [Online] October 2017. http://www.aqmd.gov/docs/default-source/caleemod/02 appendix-a2016-3-2.pdf?sfvrsn=6.



- 38. **South Coast Air Quality Management District.** *Localized Significance Thresholds Methodology.* s.l. : South Coast Air Quality Management District, 2008.
- 39. **California Air Pollution Control Officers Association (CAPCOA).** Appendix A: Calculation Details for CalEEMod. *CalEEMod.* [Online] October 2017. http://www.aqmd.gov/docs/default-source/caleemod/02 appendix-a2016-3-2.pdf?sfvrsn=6.
- 40. **South Coast Air Quality Management District.** *Localized Significance Thresholds Methodology.* s.l. : South Coast Air Quality Management District, 2003.
- 41. —. 2003 Air Quality Management Plan. [Online] 2003. https://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan/2003-aqmp.
- 42. Bay Area Air Quality Management District. [Online] http://www.baaqmd.gov/.
- 43. **South Coast Air Quality Management District.** Final 2016 Air Quality Management Plan (AQMP). [Online] March 2017. http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016-aqmp/final2016aqmp.pdf?sfvrsn=11.
- 44. South coast Air Quality Management District. CEQA Air Quality Handbook (1993). 1993.
- 45. City of Moreno Valley. City of Moreno Valley General Plan. 2006.
- 46. **South Coast Air Quality Management District.** Sierra Club, Revive the San Joaquin and League of Women Voters of Fresno, Plaintiffs and Appellants, v. County of Fresno, Defendant and Respondent and, Friant Ranchm L.P. Real Party in Interest and Respondent. [Online] 2015. https://www.courts.ca.gov/documents/9-s219783-ac-south-coast-air-quality-mgt-dist-041315.pdf.
- 47. —. RULE 402 NUISANCE. [Online] http://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-402.pdf.
- 48. **Goss, Tracy A and Kroeger, Amy.** White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution. [Online] South Coast Air Quality Management District, 2003. http://www.aqmd.gov/rules/ciwg/final_white_paper.pdf.



This page intentionally left blank



5 CERTIFICATIONS

The contents of this air study report represent an accurate depiction of the environmental impacts associated with the proposed Cottonwood & Edgemont Warehouse. The information contained in this air quality impact assessment report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at hqureshi@urbanxroads.com

Haseeb Qureshi
Associate Principal
URBAN CROSSROADS, INC.
hqureshi@urbanxroads.com

EDUCATION

Master of Science in Environmental Studies California State University, Fullerton • May 2010

Bachelor of Arts in Environmental Analysis and Design University of California, Irvine • June, 2006

PROFESSIONAL AFFILIATIONS

AEP – Association of Environmental Planners AWMA – Air and Waste Management Association ASTM – American Society for Testing and Materials

PROFESSIONAL CERTIFICATIONS

Planned Communities and Urban Infill – Urban Land Institute • June 2011 Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April 2008 Principles of Ambient Air Monitoring – CARB • August 2007 AB2588 Regulatory Standards – Trinity Consultants • November 2006 Air Dispersion Modeling – Lakes Environmental • June 2006



This page intentionally left blank



APPENDIX 2.1:

STATE/FEDERAL ATTAINMENT STATUS OF CRITERIA POLLUTANTS



APPENDIX C

MAPS AND TABLES OF AREA DESIGNATIONS FOR STATE AND NATIONAL AMBIENT AIR QUALITY STANDARDS

APPENDIX C

MAPS AND TABLES OF AREA DESIGNATIONS FOR STATE AND NATIONAL AMBIENT AIR QUALITY STANDARDS

This attachment fulfills the requirement of Health and Safety Code section 40718 for CARB to publish maps that identify areas where one or more violations of any State ambient air quality standard (State standard) or national ambient air quality standard (national standard) have been measured. The national standards are those promulgated under section 109 of the federal Clean Air Act (42 U.S.C. 7409).

This attachment is divided into three parts. The first part comprises a table showing the levels, averaging times, and measurement methods for each of the State and national standards. This is followed by a section containing maps and tables showing the area designations for each pollutant for which there is a State standard in the California Code of Regulations, title 17, section 70200. The last section contains maps and tables showing the most current area designations for the national standards.

	Ambient Air Quality Standards (Updated 5/4/16)						
Pollutant	Averaging	California S	tandards 1	National Standards ²			
Pollutalit	Time	Concentration ³	Method 4	Primary 3,5	Secondary 3.6	Method 7	
Ozone (O₃)s	1 Hour	0.09 ppm (180 μg/m³)	Ultraviolet Photometry	_	Same as Primary	Ultraviolet	
020110 (O ₃)	8 Hour	0.070 ppm (137 μg/m²)	,	0.070 ppm (137 µg/m²)	Standard	Photometry	
Respirable Particulate	24 Hour	50 μg/m³	Gravimetric or Beta	150 μg/m ^s	Same as Primary	Inertial Separation and Gravimetric	
Matter (PM10)	Annual Arithmetic Mean	20 μg/m ^s	Attenuation — —	Standard	Analysis		
Fine Particulate	24 Hour	-	_	35 μg/m³	Same as Primary Standard	Inertial Separation and Gravimetric	
Matter (PM2.5) [,]	Annual Arithmetic Mean	12 μg/m³	Gravimetric or Beta Attenuation	12.0 µg/m³	15 μg/m ^s	Analysis	
Carbon	1 Hour	20 ppm (23 mg/m²)	Non-Dispersive	35 ppm (40 mg/m²)	_	Non-Dispersive	
Monoxide	8 Hour	9.0 ppm (10 mg/m²)	Infrared Photometry (NDIR)	9 ppm (10 mg/m²)	_	Infrared Photometry (NDIR)	
(CO)	8 Hour (Lake Tahoe)	6 ppm (7 mg/m²)	(INDII ()	_	_	(NDIIV)	
Nitrogen Dioxide	1 Hour	0.18 ppm (339 µg/m²)	Gas Phase	100 ppb (188 µg/m³)	_	Gas Phase	
(NO ₂)10	Annual Arithmetic Mean	0.030 ppm (57 μg/m³)	Chemiluminescence	0.053 ppm (100 μg/m²)	Same as Primary Standard	Chemiluminescence	
	1 Hour	0.25 ppm (655 μg/m ³)		75 ppb (196 μg/m²)	_	I litro violet	
Sulfur Dioxide	3 Hour	_	Ultraviolet	_	0.5 ppm (1300 μg/m²)	Ultraviolet Flourescence; Spectrophotometry	
(SO ₂) ¹¹	24 Hour	0.04 ppm (105 μg/m²)	Fluorescence	0.14 ppm (for certain areas) ¹¹	_	(Pararosaniline Method)	
	Annual Arithmetic Mean	_		0.030 ppm (for certain areas) ¹¹	_		
	30 Day Average	1.5 μg/m³		_	_		
Lead ¹² , 13	Calendar Quarter	_	Atomic Absorption	1.5 µg/m³ (for certain areas)¹²	Same as Primary	High Volume Sampler and Atomic Absorption	
	Rolling 3-Month Average	_		0.15 μg/m ^s	Standard	, 1200. pilo.:	
Visibility Reducing Particles ⁴	8 Hour	See footnote 14	Beta Attenuation and Transmittance through Filter Tape		No		
Sulfates	24 Hour	25 μg/m³	lon Chromatography		National		
Hydrogen Sulfide	1 Hour	0.03 ppm (42 µg/m²)	Ultraviolet Fluorescence		Standards		
Vinyl Chloride ¹²	24 Hour	0.01 ppm (26 µg/m²)	Gas Chromatography				
See footnotes	on next page						

- 1. California standards for ozone, carbon monoxide (except 8-hour Lake Tahoe), sulfur dioxide (1- and 24-hour), nitrogen dioxide, and particulate matter (PM10, PM2.5, and visibility reducing particles), are values that are not to be exceeded. All others are not to be equaled or exceeded. California ambient air quality standards are listed in the Table of Standards in Section 70200 of Title 17 of the California Code of Regulations.
- 2. National standards (other than ozone, particulate matter, and those based on annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth highest 8-hour concentration measured at each site in a year, averaged over three years, is equal to or less than the standard. For PM10, the 24-hour standard is attained when the expected number of days per calendar year with a 24-hour average concentration above 150 μg/m³ is equal to or less than one. For PM2.5, the 24-hour standard is attained when 98 percent of the daily concentrations, averaged over three years, are equal to or less than the standard. Contact the U.S. EPA for further clarification and current national policies.
- 3. Concentration expressed first in units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr; ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.
- 4. Any equivalent measurement method which can be shown to the satisfaction of the CARB to give equivalent results at or near the level of the air quality standard may be used.
- 5. National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.
- National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.
- 7. Reference method as described by the U.S. EPA. An "equivalent method" of measurement may be used but must have a "consistent relationship to the reference method" and must be approved by the U.S. EPA.
- 8. On October 1, 2015, the national 8-hour ozone primary and secondary standards were lowered from 0.075 to 0.070 ppm.
- 9. On December 14, 2012, the national annual PM2.5 primary standard was lowered from 15 μg/m³ to 12.0 μg/m³. The existing national 24-hour PM2.5 standards (primary and secondary) were retained at 35 μg/m³, as was the annual secondary standard of 15 μg/m³. The existing 24-hour PM10 standards (primary and secondary) of 150 μg/m³ also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.
- 10. To attain the 1-hour national standard, the 3-year average of the annual 98th percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.
- 11. On June 2, 2010, a new 1-hour SO₂ standard was established and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99th percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO₂ national standards (24-hour and annual) remain in effect until one year after an area is designated for the 2010 standard, except that in areas designated nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved.
 - Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.
- 12. The CARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.
- 13. The national standard for lead was revised on October 15, 2008 to a rolling 3-month average. The 1978 lead standard (1.5 μ g/m³)as a quarterly average) remains in effect until one year after an area is designated for the 2008 standard, except that in areas designated nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standard are approved.
- 14. In 1989, the CARB converted both the general statewide 10-mile visibility standard and the Lake Tahoe 30-mile visibility standard to instrumental equivalents, which are "extinction of 0.23 per kilometer" and "extinction of 0.07 per kilometer" for the statewide and Lake Tahoe Air Basin standards, respectively.

Area Designations for the State Ambient Air Quality Standards

The following maps and tables show the area designations for each pollutant with a State standard set forth in the California Code of Regulations, title 17, section 60200. Each area is identified as attainment, nonattainment, nonattainment, nonattainment, as shown below:

Attainment A
Nonattainment N
Nonattainment-Transitional NA-T
Unclassified U

In general, CARB designates areas by air basin for pollutants with a regional impact and by county for pollutants with a more local impact. However, when there are areas within an air basin or county with distinctly different air quality deriving from sources and conditions not affecting the entire air basin or county, CARB may designate a smaller area. Generally, when boundaries of the designated area differ from the air basin or county boundaries, the description of the specific area is referenced at the bottom of the summary table.



TABLE 1

California Ambient Air Quality Standards Area Designations for Ozone ¹

	N	NA-T	U	Α
GREAT BASIN VALLEYS AIR BASIN				
Alpine County			Х	
Inyo County	Х			
Mono County	Х			
LAKE COUNTY AIR BASIN				Χ
LAKE TAHOE AIR BASIN				Χ
MOJAVE DESERT AIR BASIN	Х			
MOUNTAIN COUNTIES AIR BASIN				
Amador County		Χ		
Calaveras County	Х			
El Dorado County (portion)	Х			
Mariposa County	Х			
Nevada County	Х			
Placer County (portion)	Х			
Plumas County			Х	
Sierra County			Х	
Tuolumne County	Х			
NORTH CENTRAL COAST AIR BASIN				Χ
NORTH COAST AIR BASIN				Х

	N	NA-T	U	Α
NORTHEAST PLATEAU AIR BASIN				Х
SACRAMENTO VALLEY AIR BASIN				
Colusa and Glenn Counties				Х
Shasta County		Χ		
Sutter/Yuba Counties				
Sutter Buttes	Х			
Remainder of Sutter County	Х			
Yuba County	Х			
Yolo/Solano Counties		Х		
Remainder of Air Basin	Х			
SALTON SEA AIR BASIN	Х			
SAN DIEGO AIR BASIN	Х			
SAN FRANCISCO BAY AREA AIR BASIN	Х			
SAN JOAQUIN VALLEY AIR BASIN	Х			
SOUTH CENTRAL COAST AIR BASIN				
San Luis Obispo County	Х			
Santa Barbara County	Х			
Ventura County	Χ			
SOUTH COAST AIR BASIN	Χ			

¹ AB 3048 (Olberg) and AB 2525 (Miller) signed into law in 1996, made changes to Health and Safety Code, section 40925.5. One of the changes allows nonattainment districts to become nonattainment-transitional for ozone by operation of law.

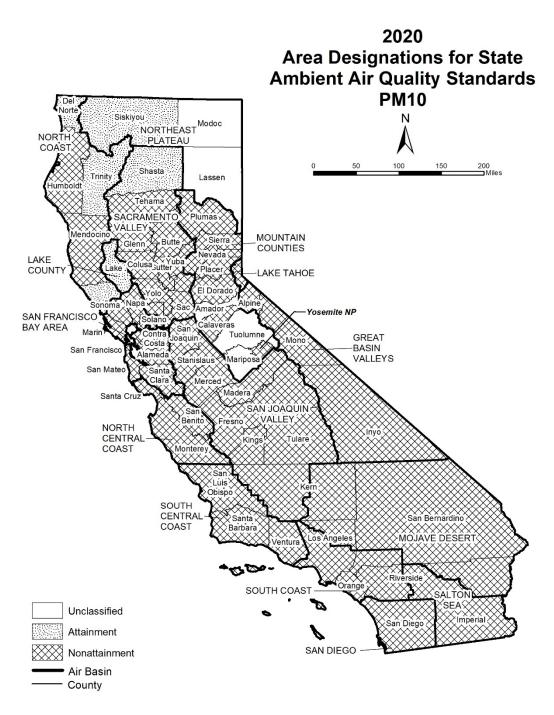


TABLE 2

California Ambient Air Quality Standards Area Designation for Suspended Particulate Matter (PM_{10})

	N	υ	Α
GREAT BASIN VALLEYS AIR BASIN	Χ		
LAKE COUNTY AIR BASIN			Х
LAKE TAHOE AIR BASIN	Χ		
MOJAVE DESERT AIR BASIN	Χ		
MOUNTAIN COUNTIES AIR BASIN			
Amador County		Χ	
Calaveras County	Χ		
El Dorado County (portion)	Χ		
Mariposa County			
- Yosemite National Park	Χ		
- Remainder of County		Χ	
Nevada County	Χ		
Placer County (portion)	Χ		
Plumas County	Χ		
Sierra County	Χ		
Tuolumne County		Х	

	N	U	Α
NORTH CENTRAL COAST AIR BASIN	Χ		
NORTH COAST AIR BASIN			
Del Norte, Sonoma (portion) and Trinity Counties			Χ
Remainder of Air Basin	Χ		
NORTHEAST PLATEAU AIR BASIN			
Siskiyou County			Χ
Remainder of Air Basin		Χ	
SACRAMENTO VALLEY AIR BASIN			
Shasta County			Χ
Remainder of Air Basin	Χ		
SALTON SEA AIR BASIN	Χ		
SAN DIEGO AIR BASIN	Χ		
SAN FRANCISCO BAY AREA AIR BASIN	Χ		
SAN JOAQUIN VALLEY AIR BASIN	Χ		
SOUTH CENTRAL COAST AIR BASIN	Χ		
SOUTH COAST AIR BASIN	Х		



TABLE 3

California Ambient Air Quality Standards Area Designations for Fine Particulate Matter ($PM_{2.5}$)

	N	U	Α
GREAT BASIN VALLEYS AIR BASIN			Χ
LAKE COUNTY AIR BASIN			Χ
LAKE TAHOE AIR BASIN			Χ
MOJAVE DESERT AIR BASIN			
San Bernardino County			
 County portion of federal Southeast Desert Modified AQMA for Ozone¹ 			Х
Remainder of Air Basin			Χ
MOUNTAIN COUNTIES AIR BASIN			
Plumas County			
- Portola Valley²	Х		
Remainder of Air Basin		Χ	
NORTH CENTRAL COAST AIR BASIN			Χ
NORTH COAST AIR BASIN			Χ
NORTHEAST PLATEAU AIR BASIN			Χ
SACRAMENTO VALLEY AIR BASIN			
Butte County	Х		
Colusa County			Χ
Glenn County			Χ
Placer County (portion)			Χ
Sacramento County			Χ
Shasta County			Χ
Sutter and Yuba Counties			Χ
Remainder of Air Basin		Х	

	N	U	Α
SALTON SEA AIR BASIN			
Imperial County			
- City of Calexico ³	Χ		
Remainder of Air Basin			Χ
SAN DIEGO AIR BASIN	Χ		
SAN FRANCISCO BAY AREA AIR BASIN	Χ		
SAN JOAQUIN VALLEY AIR BASIN	Χ		
SOUTH CENTRAL COAST AIR BASIN			
San Luis Obispo County			Χ
Santa Barbara County		Χ	
Ventura County			Χ
SOUTH COAST AIR BASIN	Х		

¹ California Code of Regulations, title 17, section 60200(b)

² California Code of Regulations, title 17, section 60200(c)

³ California Code of Regulations, title 17, section 60200(a)

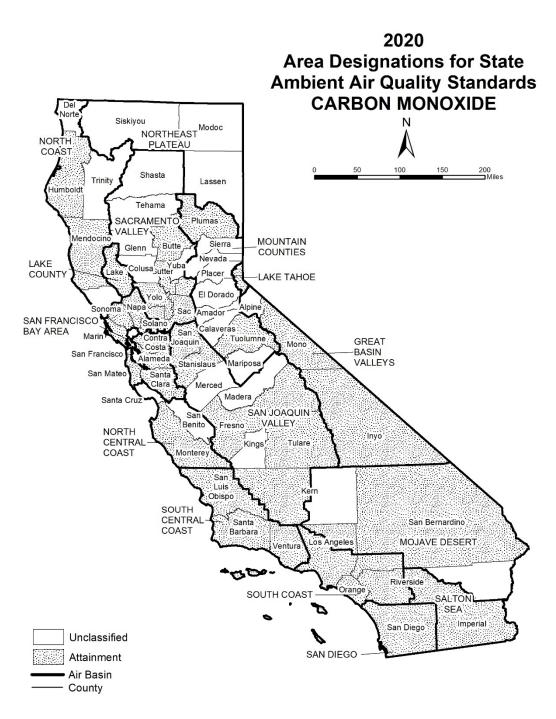


TABLE 4

California Ambient Air Quality Standards Area Designation for Carbon Monoxide*

	N	NA-T	U	Α
GREAT BASIN VALLEYS AIR BASIN				
Alpine County			Χ	
Inyo County				Χ
Mono County				Х
LAKE COUNTY AIR BASIN				Х
LAKE TAHOE AIR BASIN				Χ
MOJAVE DESERT AIR BASIN				
Kern County (portion)			Χ	
Los Angeles County (portion)				Х
Riverside County (portion)			Χ	
San Bernardino County (portion)				Х
MOUNTAIN COUNTIES AIR BASIN				
Amador County			Χ	
Calaveras County			Χ	
El Dorado County (portion)			Χ	
Mariposa County			Χ	
Nevada County			Χ	
Placer County (portion)			Χ	
Plumas County				Х
Sierra County			Χ	
Tuolumne County				Χ
NORTH CENTRAL COAST AIR BASIN				
Monterey County				Х
San Benito County			Χ	
Santa Cruz County			Χ	
NORTH COAST AIR BASIN				
Del Norte County			Χ	
Humboldt County				Х
Mendocino County				Х
Sonoma County (portion)			Χ	
Trinity County			Χ	
NORTHEAST PLATEAU AIR BASIN			Χ	

	N	NA-T	U	Α
SACRAMENTO VALLEY AIR BASIN		1100		
Butte County				Х
Colusa County			Х	
Glenn County			Х	
Placer County (portion)				Х
Sacramento County				Х
Shasta County			Х	
Solano County (portion)				Х
Sutter County				Х
Tehama County			Х	
Yolo County				Х
Yuba County			Х	
SALTON SEA AIR BASIN				Х
SAN DIEGO AIR BASIN				Χ
SAN FRANCISCO BAY AREA AIR BASIN				Χ
SAN JOAQUIN VALLEY AIR BASIN				
Fresno County				Х
Kern County (portion)				Χ
Kings County			Х	
Madera County			Χ	
Merced County			Х	
San Joaquin County				Χ
Stanislaus County				Χ
Tulare County				Χ
SOUTH CENTRAL COAST AIR BASIN				Х
SOUTH COAST AIR BASIN				Χ

 $[\]ensuremath{^{\star}}$ The area designated for carbon monoxide is a county or portion of a county



TABLE 5

California Ambient Air Quality Standards Area Designations for Nitrogen Dioxide

	N	J	Α
GREAT BASIN VALLEYS AIR BASIN			Χ
LAKE COUNTY AIR BASIN			Χ
LAKE TAHOE AIR BASIN			Χ
MOJAVE DESERT AIR BASIN			Χ
MOUNTAIN COUNTIES AIR BASIN			Χ
NORTH CENTRAL COAST AIR BASIN			Χ
NORTH COAST AIR BASIN			Χ
NORTHEAST PLATEAU AIR BASIN			Χ

	N	J	Α
SACRAMENTO VALLEY AIR BASIN			Χ
SALTON SEA AIR BASIN			Χ
SAN DIEGO AIR BASIN			Χ
SAN FRANCISCO BAY AREA AIR BASIN			Χ
SAN JOAQUIN VALLEY AIR BASIN			Χ
SOUTH CENTRAL COAST AIR BASIN			Χ
SOUTH COAST AIR BASIN			
CA 60 Near-road Portion of San Bernardino, Riverside, and Los Angeles Counties	Х		
Remainder of Air Basin			Χ



TABLE 6

California Ambient Air Quality Standards Area Designation for Sulfur Dioxide*

	N	Α
GREAT BASIN VALLEYS AIR BASIN		Χ
LAKE COUNTY AIR BASIN		Χ
LAKE TAHOE AIR BASIN		Χ
MOJAVE DESERT AIR BASIN		Χ
MOUNTAIN COUNTIES AIR BASIN		Χ
NORTH CENTRAL COAST AIR BASIN		Χ
NORTH COAST AIR BASIN		Χ
NORTHEAST PLATEAU AIR BASIN		Х

	N	Α
SACRAMENTO VALLEY AIR BASIN		Χ
SALTON SEA AIR BASIN		Χ
SAN DIEGO AIR BASIN		Χ
SAN FRANCISCO BAY AREA AIR BASIN		Χ
SAN JOAQUIN VALLEY AIR BASIN		Χ
SOUTH CENTRAL COAST AIR BASIN		Χ
SOUTH COAST AIR BASIN		Χ

^{*} The area designated for sulfur dioxide is a county or portion of a county. Since all areas in the State are in attainment for this standard, air basins are indicated here for simplicity.



TABLE 7

California Ambient Air Quality Standards Area Designation for Sulfates

	N	U	Α
GREAT BASIN VALLEYS AIR BASIN			Χ
LAKE COUNTY AIR BASIN			Χ
LAKE TAHOE AIR BASIN			Χ
MOJAVE DESERT AIR BASIN			Χ
MOUNTAIN COUNTIES AIR BASIN			Χ
NORTH CENTRAL COAST AIR BASIN			Χ
NORTH COAST AIR BASIN			Χ
NORTHEAST PLATEAU AIR BASIN			Χ

N	U	Α
		Χ
		Χ
		Χ
		Χ
		Χ
		Χ
		Χ
	N	N U

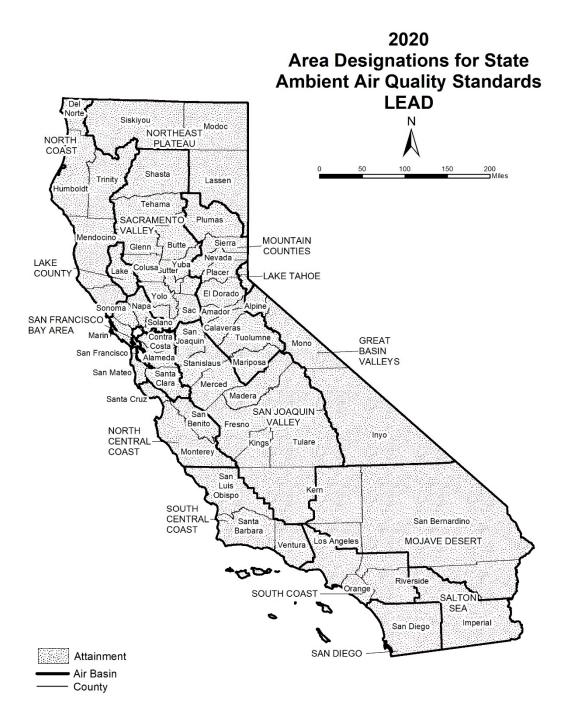


TABLE 8

California Ambient Air Quality Standards Area Designations for Lead (particulate)*

	N	J	Α
GREAT BASIN VALLEYS AIR BASIN			Χ
LAKE COUNTY AIR BASIN			Χ
LAKE TAHOE AIR BASIN			Χ
MOJAVE DESERT AIR BASIN			Χ
MOUNTAIN COUNTIES AIR BASIN			Χ
NORTH CENTRAL COAST AIR BASIN			Χ
NORTH COAST AIR BASIN			Χ
NORTHEAST PLATEAU AIR BASIN			Х
SACRAMENTO VALLEY AIR BASIN			Χ

	Ν	U	Α
SALTON SEA AIR BASIN			Χ
SAN DIEGO AIR BASIN			Χ
SAN FRANCISCO BAY AREA AIR BASIN			Χ
SAN JOAQUIN VALLEY AIR BASIN			Χ
SOUTH CENTRAL COAST AIR BASIN			Χ
SOUTH COAST AIR BASIN			Χ

^{*} The area designated for lead is a county or portion of a county. Since all areas in the State are in attainment for this standard, air basins are indicated here for simplicity.

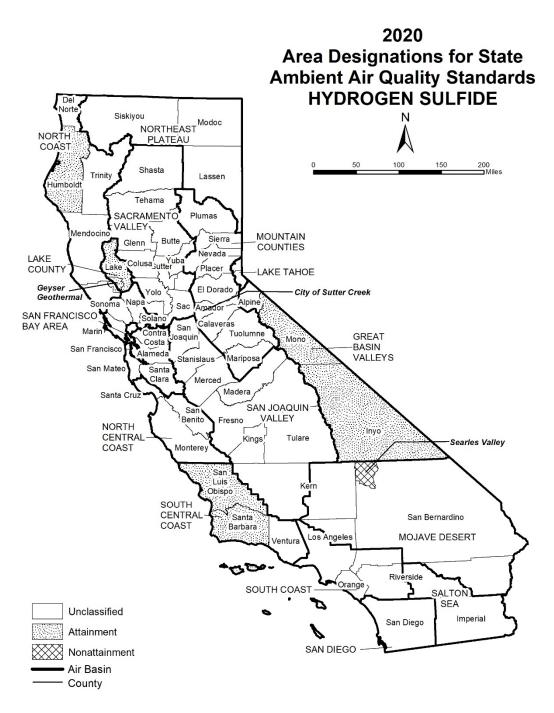


TABLE 9

California Ambient Air Quality Standards Area Designation for Hydrogen Sulfide*

	N	NA-T	U	Α
GREAT BASIN VALLEYS AIR BASIN				
Alpine County			Χ	
Inyo County				Х
Mono County				Х
LAKE COUNTY AIR BASIN				Х
LAKE TAHOE AIR BASIN			Х	
MOJAVE DESERT AIR BASIN				
Kern County (portion)			Х	
Los Angeles County (portion)			Х	
Riverside County (portion)			Х	
San Bernardino County (portion)				
- Searles Valley Planning Area ¹	Х			
- Remainder of County			Χ	
MOUNTAIN COUNTIES AIR BASIN				
Amador County				
- City of Sutter Creek	Х			
- Remainder of County			Χ	
Calaveras County			Χ	
El Dorado County (portion)			Χ	
Mariposa County			Χ	
Nevada County			Χ	
Placer County (portion)			Χ	
Plumas County			Х	
Sierra County			Х	
Tuolumne County			Х	

	1	I	l	l <u>.</u>
	N	NA-T	U	Α
NORTH CENTRAL COAST AIR BASIN			Х	
NORTH COAST AIR BASIN				
Del Norte County			Χ	
Humboldt County				Χ
Mendocino County			Χ	
Sonoma County (portion)				
- Geyser Geothermal Area ²				Χ
- Remainder of County			Χ	
Trinity County			Χ	
NORTHEAST PLATEAU AIR BASIN			Χ	
SACRAMENTO VALLEY AIR BASIN			Χ	
SALTON SEA AIR BASIN			Χ	
SAN DIEGO AIR BASIN			Χ	
SAN FRANCISCO BAY AREA AIR BASIN			Χ	
SAN JOAQUIN VALLEY AIR BASIN			Χ	
SOUTH CENTRAL COAST AIR BASIN				
San Luis Obispo County				Χ
Santa Barbara County				Х
Ventura County			Χ	
SOUTH COAST AIR BASIN			Χ	

 $[\]ensuremath{^{\star}}$ The area designated for hydrogen sulfide is a county or portion of a county

¹ 52 Federal Register 29384 (August 7, 1987)

² California Code of Regulations, title 17, section 60200(d)

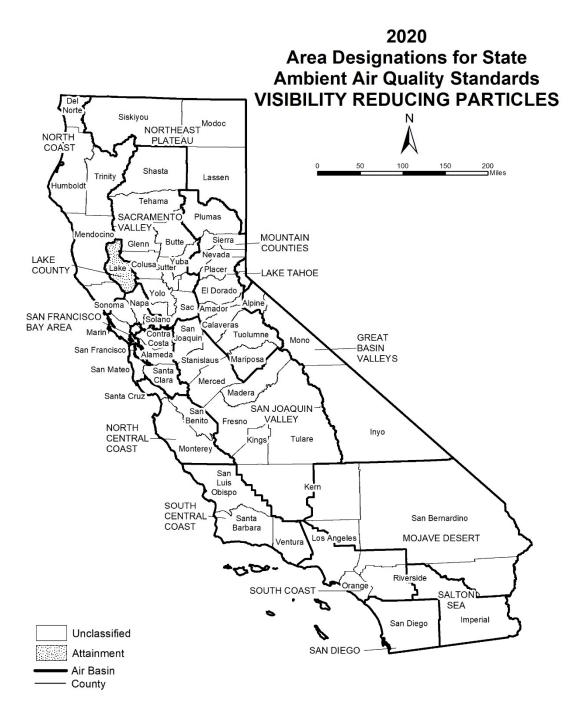


TABLE 10

California Ambient Air Quality Standards Area Designation for Visibility Reducing Particles

	N	NA-T	J	Α
GREAT BASIN VALLEYS AIR BASIN			Χ	
LAKE COUNTY AIR BASIN				Х
LAKE TAHOE AIR BASIN			Χ	
MOJAVE DESERT AIR BASIN			Х	
MOUNTAIN COUNTIES AIR BASIN			Χ	
NORTH CENTRAL COAST AIR BASIN			Х	
NORTH COAST AIR BASIN			Χ	
NORTHEAST PLATEAU AIR BASIN			Х	

	N	NA-T	U	Α
SACRAMENTO VALLEY AIR BASIN			Х	
SALTON SEA AIR BASIN			Х	
SAN DIEGO AIR BASIN			Х	
SAN FRANCISCO BAY AREA AIR BASIN			Х	
SAN JOAQUIN VALLEY AIR BASIN			Х	
SOUTH CENTRAL COAST AIR BASIN			Х	
SOUTH COAST AIR BASIN			Х	

Area Designations for the National Ambient Air Quality Standards

The following maps and tables show the area designations for each pollutant with a national ambient air quality standard. Additional information about the federal area designations is available on the U.S. EPA website:

https://www.epa.gov/green-book

Over the last several years, U.S. EPA has been reviewing the levels of the various national standards. The agency has already promulgated new standard levels for some pollutants and is considering revising the levels for others. Information about the status of these reviews is available on the U.S. EPA website:

https://www.epa.gov/criteria-air-pollutants

Designation Categories

Suspended Particulate Matter (PM_{10}). The U.S. EPA uses three categories to designate areas with respect to PM_{10} :

- Attainment (A)
- Nonattainment (N)
- Unclassifiable (U)

Ozone, Fine Suspended Particulate Matter ($PM_{2.5}$), Carbon Monoxide (CO), and Nitrogen Dioxide (NO_2). The U.S. EPA uses two categories to designate areas with respect to these standards:

- Nonattainment (N)
- Unclassifiable/Attainment (U/A)

The national 1-hour ozone standard was revoked effective June 15, 2005, and the area designations map reflects the 2015 national 8-hour ozone standard of 0.070 ppm. Area designations were finalized on August 3, 2018.

On December 14, 2012, the U.S. EPA established a new national annual primary PM_{2.5} standard of 12.0 μ g/m³. Area designations were finalized in December 2014. The current designation map reflects the most recently revised (2012) annual average standard of 12.0 μ g/m³ as well as the 24-hour standard of 35 μ g/m³, revised in 2006.

On January 22, 2010, the U.S. EPA established a new national 1-hour NO₂ standard of 100 parts per billion (ppb) and retained the annual average standard of 53 ppb. Designations for the primary NO₂ standard became effective on February 29, 2012. All areas of California meet this standard.

Sulfur Dioxide (SO₂). The U.S. EPA uses three categories to designate areas with respect to the 24-hour and annual average sulfur dioxide standards. These designation categories are:

- Nonattainment (N),
- Unclassifiable (U), and
- Unclassifiable/Attainment (U/A).

On June 2, 2010, the U.S. EPA established a new primary 1-hour SO₂ standard of 75 parts per billion (ppb). At the same time, U.S. EPA revoked the 24-hour and annual


average standards. Area designations for the 1-hour SO_2 standard were finalized on December 21, 2017 and are reflected in the area designations map.

Lead (particulate). The U.S. EPA promulgated a new rolling 3-month average lead standard in October 2008 of 0.15 μ g/m³. Designations were made for this standard in November 2010.

Designation Areas

From time to time, the boundaries of the California air basins have been changed to facilitate the planning process. CARB generally initiates these changes, and they are not always reflected in the U.S. EPA's area designations. For purposes of consistency, the maps in this attachment reflect area designation boundaries and nomenclature as promulgated by the U.S. EPA. In some cases, these may not be the same as those adopted by CARB. For example, the national area designations reflect the former Southeast Desert Air Basin. In accordance with Health and Safety Code section 39606.1, CARB redefined this area in 1996 to be the Mojave Desert Air Basin and Salton Sea Air Basin. The definitions and boundaries for all areas designated for the national standards can be found in Title 40, Code of Federal Regulations (CFR), Chapter I, Subchapter C, Part 81.305. They are available on the web at:

https://ecfr.io/Title-40/se40.20.81 1305

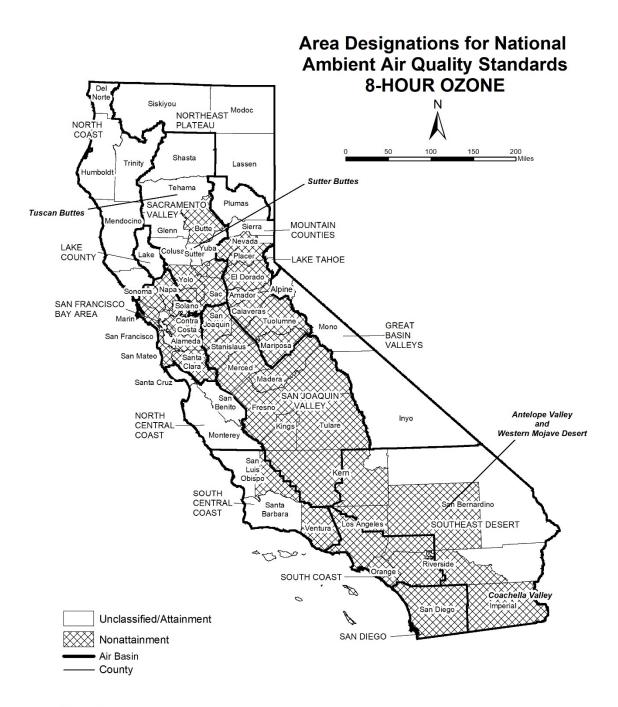

Source Date: August 2019 Air Quality Planning and Science Division

TABLE 11

National Ambient Air Quality Standards Area Designations for 8-Hour Ozone*

·	N	U/A
GREAT BASIN VALLEYS AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х
LAKE TAHOE AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		
Amador County	Х	
Calaveras County	Х	
El Dorado County (portion) ¹	Х	
Mariposa County	Х	
Nevada County		
- Western Nevada County	Х	
- Remainder of County		Х
Placer County (portion) ¹	Х	
Plumas County		Х
Sierra County		Х
Tuolumne County	Х	
NORTH CENTRAL COAST AIR BASIN		Х
NORTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		Х
SACRAMENTO VALLEY AIR BASIN		
Butte County	Х	
Colusa County		Х
Glenn County		Х
Sacramento Metro Area ¹	Х	
Shasta County		Х
Sutter County		
- Sutter Buttes	Х	
- Southern portion of Sutter County ¹	Х	
- Remainder of Sutter County		Х
Tehama County		
- Tuscan Buttes	Х	
- Remainder of Tehama County		Х

	N	U/A
SACRAMENTO VALLEY AIR BASIN (cont.)		
Yolo County ¹	Х	
Yuba County		Χ
SAN DIEGO COUNTY	Х	
SAN FRANCISCO BAY AREA AIR BASIN	Х	
SAN JOAQUIN VALLEY AIR BASIN	Х	
SOUTH CENTRAL COAST AIR BASIN ²		
San Luis Obispo County		
- Eastern San Luis Obispo County	Х	
- Remainder of County		Х
Santa Barbara County		Χ
Ventura County		
- Area excluding Anacapa and San Nicolas Islands	Х	
- Channel Islands ²		Χ
SOUTH COAST AIR BASIN ²	Х	
SOUTHEAST DESERT AIR BASIN		
Kern County (portion)	Х	
- Indian Wells Valley		Χ
Imperial County	Х	
Los Angeles County (portion)	Х	
Riverside County (portion)		
- Coachella Valley	Х	
- Non-AQMA portion		Х
San Bernardino County		
- Western portion (AQMA)	Х	
- Eastern portion (non-AQMA)		Х

 $^{^{\}star}$ Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305. NOTE: This map and table reflect the 2015 8-hour ozone standard of 0.070 ppm.


¹ For this purpose, the Sacramento Metro Area comprises all of Sacramento and Yolo Counties, the Sacramento Valley Air Basin portion of Solano County, the southern portion of Sutter County, and the Sacramento Valley and Mountain Counties Air Basins portions of Placer and El Dorado counties.

² South Central Coast Air Basin Channel Islands:

Santa Barbara County includes Santa Cruz, San Miguel, Santa Rosa, and Santa Barbara Islands. Ventura County includes Anacapa and San Nicolas Islands.

South Coast Air Basin:

Los Angeles County includes San Clemente and Santa Catalina Islands.

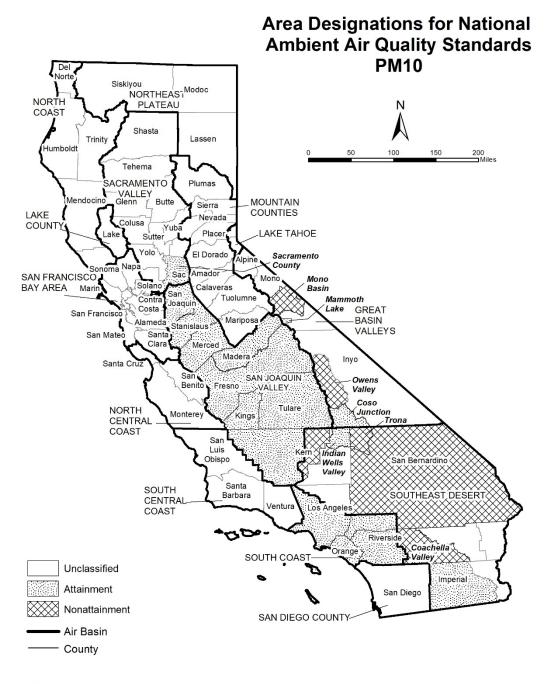

Source Date: October 2020 Air Quality Planning and Science Division

TABLE 12

National Ambient Air Quality Standards Area Designations for Suspended Particulate Matter (PM_{10})*

	N	U	Α
GREAT BASIN VALLEYS AIR BASIN			
Alpine County		Χ	
Inyo County		•	
- Owens Valley Planning Area	Х		
- Coso Junction			Х
- Remainder of County		Χ	
Mono County			
- Mammoth Lake Planning Area			Х
- Mono Lake Basin	Х		
- Remainder of County		Χ	
LAKE COUNTY AIR BASIN		Χ	
LAKE TAHOE AIR BASIN		Χ	
MOUNTAIN COUNTIES AIR BASIN		•	
Placer County (portion) ¹		Χ	
Remainder of Air Basin		Χ	
NORTH CENTRAL COAST AIR BASIN		Χ	
NORTH COAST AIR BASIN		Χ	
NORTHEAST PLATEAU AIR BASIN		Χ	
SACRAMENTO VALLEY AIR BASIN			
Butte County		Χ	
Colusa County		Χ	
Glenn County		Χ	
Placer County (portion) ¹		Χ	
Sacramento County ²			Х
Shasta County		Χ	
Solano County (portion)		Χ	
Sutter County		Χ	
Tehama County		Χ	
Yolo County		Χ	
Yuba County		Χ	

	-	ı	ı
	N	U	Α
SAN DIEGO COUNTY		Χ	
SAN FRANCISCO BAY AREA AIR BASIN		Χ	
SAN JOAQUIN VALLEY AIR BASIN			Χ
SOUTH CENTRAL COAST AIR BASIN		Χ	
SOUTH COAST AIR BASIN			Χ
SOUTHEAST DESERT AIR BASIN			
Eastern Kern County			
- Indian Wells Valley			Χ
- Portion within San Joaquin Valley Planning Area	Х		
- Remainder of County		Χ	
Imperial County			
- Imperial Valley Planning Area ³			Χ
- Remainder of County		Χ	
Los Angeles County (portion)		Χ	
Riverside County (portion)			
- Coachella Valley ⁴	Х		
- Non-AQMA portion		Χ	
San Bernardino County			
- Trona	Х		
- Remainder of County	Х		

 $^{^{\}star}$ Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

¹ U.S. EPA designation puts the Sacramento Valley Air Basin portion of Placer County in the Mountain Counties Air Basin.


 $^{^{2}}$ Air quality in Sacramento County meets the national PM₁₀ standards. The request for redesignation to attainment was approved by U.S. EPA in September 2013.

³ The request for redesignation to attainment for the Imperial Valley Planning Area was approved by U.S. EPA and in September 2020, effective October 2020.

 $^{^4}$ Air quality in Coachella Valley meets the national PM $_{10}$ standards. A request for redesignation to attainment has been submitted to U.S. EPA.

FIGURE 13

Area Designations for National Ambient Air Quality Standards PM2.5

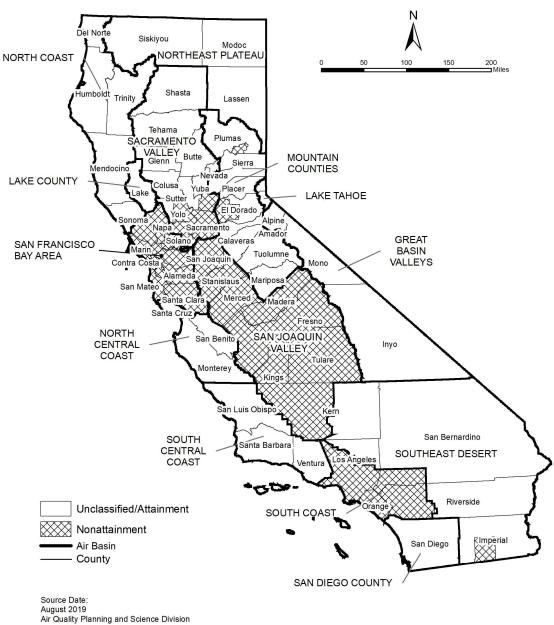

Air Quality Planning and Science Division

TABLE 13

National Ambient Air Quality Standards Area Designations for Fine Particulate Matter (PM_{2.5})

	N	U/A
GREAT BASIN VALLEYS AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х
LAKE TAHOE AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		
Plumas County		
- Portola Valley Portion of Plumas	Х	
- Remainder of Plumas County		Х
Remainder of Air Basin		Х
NORTH CENTRAL COAST AIR BASIN		Х
NORTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		Х
SACRAMENTO VALLEY AIR BASIN		
Sacramento Metro Area ¹	Х	
Sutter County		Х
Yuba County (portion)		Х
Remainder of Air Basin		Х

	N	U/A
SAN DIEGO COUNTY		Χ
SAN FRANCISCO BAY AREA AIR BASIN ²	Χ	
SAN JOAQUIN VALLEY AIR BASIN	Χ	
SOUTH CENTRAL COAST AIR BASIN		Χ
SOUTH COAST AIR BASIN ³	Χ	
SOUTHEAST DESERT AIR BASIN		
Imperial County (portion) ⁴	Χ	
Remainder of Air Basin		Х

^{*} Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305. This map reflects the 2006 24-hour $PM_{2.5}$ standard as well as the 1997 and 2012 $PM_{2.5}$ annual standards.

¹ For this purpose, Sacramento Metro Area comprises all of Sacramento and portions of El Dorado, Placer, Solano, and Yolo Counties. Air quality in this area meets the national PM_{2.5} standards. A Determination of Attainment for the 2006 24-hour PM_{2.5} standard was made by U.S. EPA in June 2017.

 $^{^2}$ Air quality in this area meets the national PM_{2.5} standards. A Determination of Attainment for the 2006 24-hour PM_{2.5} standard was made by U.S. EPA in June 2017.

 $^{^3}$ Those lands of the Santa Rosa Band of Cahulla Mission Indians in Riverside County are designated Unclassifiable/Attainment.

 $^{^4}$ That portion of Imperial County encompassing the urban and surrounding areas of Brawley, Calexico, El Centro, Heber, Holtville, Imperial, Seeley, and Westmorland. Air quality in this area meets the national PM_{2.5} standards. A Determination of Attainment for the 2006 24-hour PM_{2.5} standard was made by U.S. EPA in June 2017.

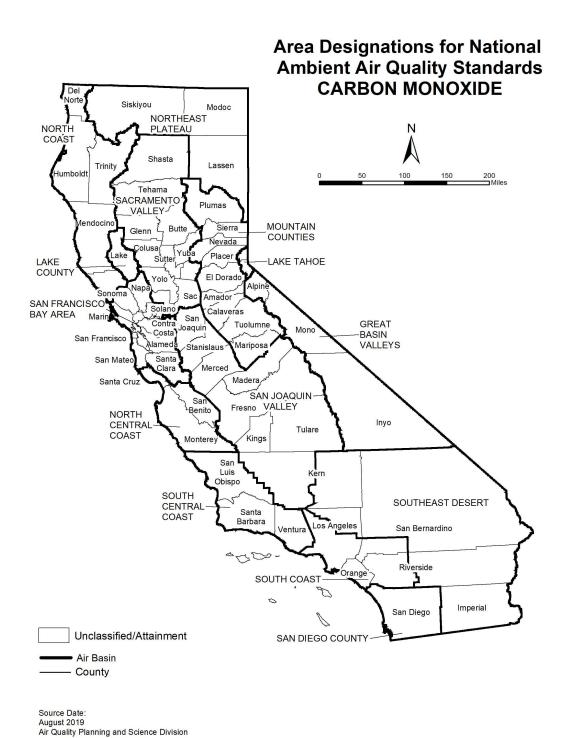


TABLE 14

National Ambient Air Quality Standards Area Designations for Carbon Monoxide*

	N	U/A
GREAT BASIN VALLEYS AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х
LAKE TAHOE AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		Х
NORTH CENTRAL COAST AIR BASIN		Х
NORTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		Х

	N	U/A
SACRAMENTO VALLEY AIR BASIN		Χ
SAN DIEGO COUNTY		Х
SAN FRANCISCO BAY AREA AIR BASIN		Х
SAN JOAQUIN VALLEY AIR BASIN		Х
SOUTH CENTRAL COAST AIR BASIN		Х
SOUTH COAST AIR BASIN		Χ
SOUTHEAST DESERT AIR BASIN		Х

 $^{^{\}star}$ Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

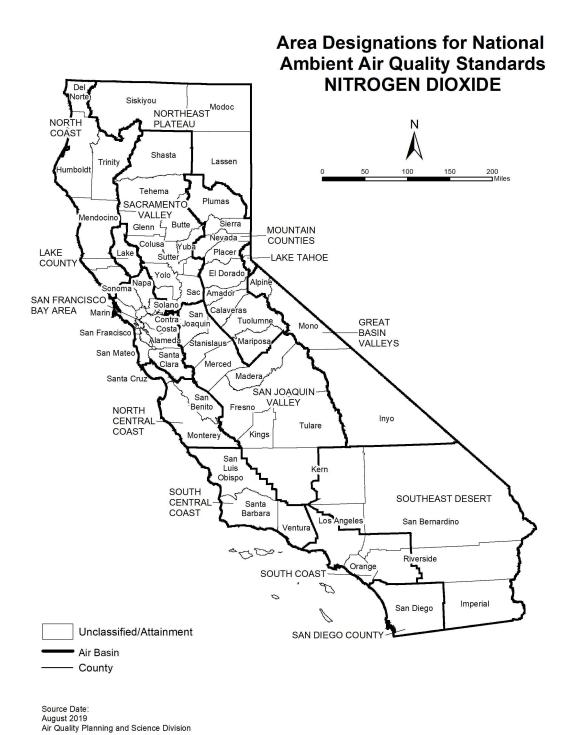



TABLE 15

National Ambient Air Quality Standards Area Designations for Nitrogen Dioxide*

	N	U/A
GREAT BASIN VALLEYS AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х
LAKE TAHOE AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		Х
NORTH CENTRAL COAST AIR BASIN		Х
NORTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		Х

	N	U/A
SACRAMENTO VALLEY AIR BASIN		Х
SAN DIEGO COUNTY		Х
SAN FRANCISCO BAY AREA AIR BASIN		Х
SAN JOAQUIN VALLEY AIR BASIN		Х
SOUTH CENTRAL COAST AIR BASIN		Х
SOUTH COAST AIR BASIN		Х
SOUTHEAST DESERT AIR BASIN		Х

 $^{^{\}star}$ Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

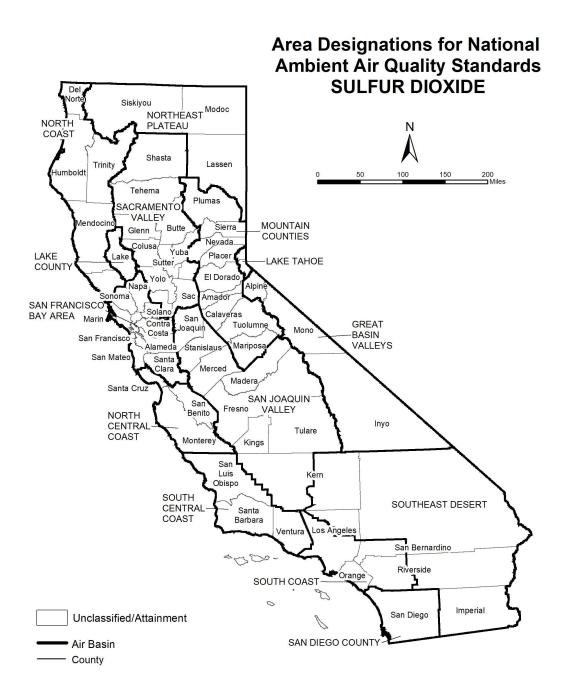

Source Date: August 2019 Air Quality Planning and Science Division

TABLE 16

National Ambient Air Quality Standards Area Designations for Sulfur Dioxide*

	N	U/A
GREAT BASIN VALLEYS AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х
LAKE TAHOE AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		Х
NORTH CENTRAL COAST AIR BASIN		Χ
NORTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		Χ
SACRAMENTO VALLEY AIR BASIN		Х
SAN DIEGO COUNTY		Χ
SAN FRANCISCO BAY AREA AIR BASIN		Х
SAN JOAQUIN VALLEY AIR BASIN		
Fresno County		Х
Kern County (portion)		Χ
Kings County		Х
Madera County		Х
Merced County		Х
San Joaquin County		Х
Stanislaus County		Х
Tulare County		Х

	N	U/A
SOUTH CENTRAL COAST AIR BASIN		
San Luis Obispo County		Х
Santa Barbara County		Х
Ventura County		Х
Channel Islands ¹		Х
SOUTH COAST AIR BASIN		Х
SOUTHEAST DESERT AIR BASIN		
Imperial County		Х
Remainder of Air Basin		Х

Note that the San Clemente and Santa Catalina Islands are considered part of Los Angeles County, and therefore, are included as part of the South Coast Air Basin.

^{*} Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305. NOTE: This map and table reflect the 2010 1-hour SO_2 standard of 75 ppb.

¹ South Central Coast Air Basin Channel Islands:

Santa Barbara County includes Santa Cruz, San Miguel, Santa Rosa, and Santa Barbara Islands. Ventura County includes Anacapa and San Nicolas Islands.

Area Designations for National Ambient Air Quality Standards LEAD Siskiyou Modoc NORTHEAST NORTH PLATEAU COAST Shasta 50 100 150 Lassen 200 Miles Humboldt Tehama ACRAMENTO VALLEY-MOUNTAIN € Butte Sierra Glenn COUNTIES Nevada sa Yuba Sutter Placer LAKE LAKE TAHOE COUNTY El Dorad SAN FRANCISCO Calaveras **BAY AREA GREAT** Tuolumne Joaquir Mono Costa BASIN San Francisco Alamed Stanislaus Mariposa **VALLEYS** Santa Merced Santa Cruz Madera SAN JOAQUIN San Benito Fresno VALLEY NORTH CENTRAL COAST Inyo Tulare Kings Montere San Obispo SOUTH SOUTHEAST DESERT CENTRAL COAST Barbara San Bernardino Riverside SOUTH COAST Imperial Unclassified/Attainment San Diego Nonattainment SAN DIEGO COUNTY Air Basin - County

Source Date: August 2019 Air Quality Planning and Science Division

TABLE 17

National Ambient Air Quality Standards Area Designations for Lead (particulate)

	N	U/A
GREAT BASIN VALLEYS AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х
LAKE TAHOE AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		Х
NORTH CENTRAL COAST AIR BASIN		Х
NORTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		Х
SACRAMENTO VALLEY AIR BASIN		Х

	N	U/A
SAN DIEGO COUNTY		Χ
SAN FRANCISCO BAY AREA AIR BASIN		Х
SAN JOAQUIN VALLEY AIR BASIN		Χ
SOUTH CENTRAL COAST AIR BASIN		Х
SOUTH COAST AIR BASIN		
Los Angeles County (portion) ¹	Χ	
Remainder of Air Basin		Χ
SOUTHEAST DESERT AIR BASIN		Х

¹ Portion of County in Air Basin, not including Channel Islands

This page intentionally left blank



APPENDIX 3.1:

CALEEMOD CONSTRUCTION EMISSIONS MODEL OUTPUTS



CalEEMod Version: CalEEMod.2020.4.0 Page 1 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Cottonwood & Edgemont (Construction - Unmitigated)

Riverside-South Coast County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Heavy Industry	89.67	1000sqft	2.06	89,667.00	0
Refrigerated Warehouse-No Rail	9.96	1000sqft	0.23	9,963.00	0
Other Asphalt Surfaces	176.40	1000sqft	4.05	176,404.00	0
Parking Lot	130.00	Space	0.81	35,264.00	0
City Park	0.79	Acre	0.79	34,588.00	0

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N20 Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project area is 7.94 acres

Construction Phase - Construction schedule based on information provided by the Project Applicant

Off-road Equipment - Construction equipment adjusted based on the changes made to the Construction Schedule

Off-road Equipment - Equipment based on information provided by the Project Applicant

Off-road Equipment - Equipment based on information provided by the Project Applicant

Off-road Equipment - Equipment based on information provided by the Project Applicant

Off-road Equipment - Equipment based on information provided by the Project Applicant

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Trips and VMT - CalEEMod only assumes Vendor Trips during Building Construction. The CalEEMod default trips were ratioed between each phase based on the number of days

Grading - As a conservative measure, it is assumed that up to 1 acre can be disturbed per day during Site Preparation activities

Architectural Coating - Rule 1113

Vehicle Trips - Construction run only

Energy Use - Construction run only

Water And Wastewater - Construction run only

Solid Waste - Construction run only

Construction Off-road Equipment Mitigation - Rule 403

Table Name	Column Name	Default Value	New Value
tblArchitecturalCoating	EF_Nonresidential_Exterior	100.00	50.00
tblArchitecturalCoating	EF_Nonresidential_Interior	100.00	50.00
tblConstructionPhase	NumDays	10.00	20.00
tblConstructionPhase	NumDays	20.00	23.00
tblConstructionPhase	NumDays	230.00	130.00
tblConstructionPhase	NumDays	20.00	10.00
tblConstructionPhase	NumDays	20.00	10.00
tblEnergyUse	LightingElect	2.93	0.00
tblEnergyUse	LightingElect	0.35	0.00
tblEnergyUse	LightingElect	2.37	0.00
tblEnergyUse	NT24E	5.02	0.00
tblEnergyUse	NT24E	36.52	0.00
tblEnergyUse	NT24NG	17.13	0.00
tblEnergyUse	NT24NG	48.51	0.00
tblEnergyUse	T24E	1.97	0.00
tblEnergyUse	T24E	0.95	0.00
tblEnergyUse	T24NG	15.20	0.00
tblEnergyUse	T24NG	3.22	0.00
tblGrading	AcresOfGrading	103.50	115.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblGrading tblGrading	AcresOfGrading	0.00	20.00
tblGrading	\$ -		<u>.</u>
	MaterialExported	0.00	10,600.00
tblLandUse	LandUseSquareFeet	52,000.00	35,264.00
tblLandUse	LandUseSquareFeet	34,412.40	34,588.00
tblLandUse	LotAcreage	1.17	0.81
tblOffRoadEquipment	LoadFactor	0.42	0.42
tblOffRoadEquipment	LoadFactor	0.37	0.37
tblOffRoadEquipment	LoadFactor	0.48	0.48
tblOffRoadEquipment	LoadFactor	0.42	0.42
tblOffRoadEquipment	OffRoadEquipmentType		Other Construction Equipment
tblOffRoadEquipment	OffRoadEquipmentType		Skid Steer Loaders
tblOffRoadEquipment	OffRoadEquipmentType		Skid Steer Loaders
tblOffRoadEquipment	OffRoadEquipmentType		Scrapers
tblOffRoadEquipment	OffRoadEquipmentType		Other Construction Equipment
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	1.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	1.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	4.00	1.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblSolidWaste	SolidWasteGenerationRate	0.07	0.00
tblSolidWaste	SolidWasteGenerationRate	111.19	0.00
tblSolidWaste	SolidWasteGenerationRate	9.36	0.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

International Content				
tbTripsAndVMT VendorTripNumber 57.00 38.00 tbTripsAndVMT VendorTripNumber 0.00 3.00 tbTripsAndVMT VendorTripNumber 0.00 3.00 tbVehicleTrips CC_TL 8.40 0.00 tbVehicleTrips CC_TTP 48.00 0.00 tbVehicleTrips CC_TTP 28.00 0.00 tbVehicleTrips CNW_TL 6.90 0.00 tbVehicleTrips CNW_TL 6.90 0.00 tbVehicleTrips CNW_TL 6.90 0.00 tbVehicleTrips CNW_TTP 19.00 0.00 tbVehicleTrips CNW_TTP 19.00 0.00 tbVehicleTrips CNW_TTP 110.60 0.00	tblTripsAndVMT	VendorTripNumber	0.00	6.00
tbITripsAndVMT VendorTripNumber 0.00 3.00 tbITripsAndVMT VendorTripNumber 0.00 3.00 tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TTP 48.00 0.00 tbIVehicleTrips CC_TTP 28.00 0.00 tbIVehicleTrips CNW_TL 6.90 0.00	tblTripsAndVMT	VendorTripNumber	0.00	7.00
biffripsAndVMT VendorTripNumber 0.00 3.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TTP 48.00 0.00 tblVehicleTrips CC_TTP 28.00 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00	tblTripsAndVMT	VendorTripNumber	57.00	38.00
tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TTP 48.00 0.00 tblVehicleTrips CC_TTP 28.00 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00	tblTripsAndVMT	VendorTripNumber	0.00	3.00
tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TTP 48.00 0.00 tbIVehicleTrips CC_TTP 28.00 0.00 tbIVehicleTrips CNW_TL 6.90 0.00 tbIVehicleTrips CNW_TTP 19.00 0.00 tbIVehicleTrips CNW_TTP 13.00 0.00 tbIVehicleTrips CW_TL 16.60 0.00 tbIVehicleTrips CW_TL 16.60 0.00 tbIVehicleTrips CW_TL 16.60 0.00	tblTripsAndVMT	VendorTripNumber	0.00	3.00
tbl/VehicleTrips CC_TL 8.40 0.00 tbl/VehicleTrips CC_TL 8.40 0.00 tbl/VehicleTrips CC_TTP 8.40 0.00 tbl/VehicleTrips CC_TTP 48.00 0.00 tbl/VehicleTrips CC_TTP 28.00 0.00 tbl/VehicleTrips CNW_TL 6.90 0.00 tbl/VehicleTrips CNW_TTP 19.00 0.00 tbl/VehicleTrips CNW_TTP 13.00 0.00 tbl/VehicleTrips CW_TL 16.60 0.00 tbl/VehicleTrips CW_TL 16.60 0.00 tbl/VehicleTrips CW_TL 16.60 0.00 tbl/VehicleTrips CW_TL 16.60 0.0	tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TTP 8.40 0.00 tblVehicleTrips CC_TTP 48.00 0.00 tblVehicleTrips CC_TTP 28.00 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 <td>tblVehicleTrips</td> <td>CC_TL</td> <td>8.40</td> <td>0.00</td>	tblVehicleTrips	CC_TL	8.40	0.00
tbl/ehicleTrips CC_TL 8.40 0.00 tbl/ehicleTrips CC_TTP 48.00 0.00 tbl/ehicleTrips C_TTP 28.00 0.00 tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TTP 19.00 0.00 tbl/ehicleTrips CNW_TTP 13.00 0.00 tbl/ehicleTrips CW_TL 16.60 0.00	tblVehicleTrips	CC_TL	8.40	0.00
tbIVehicleTrips CC_TTP 48.00 0.00 tbIVehicleTrips CC_TTP 28.00 0.00 tbIVehicleTrips CNW_TL 6.90 0.00 tbIVehicleTrips CNW_TTP 19.00 0.00 tbIVehicleTrips CNW_TTP 13.00 0.00 tbIVehicleTrips CNW_TTP 41.00 0.00 tbIVehicleTrips CW_TL 16.60 0.00 tbIVehicleTrips CW_TTL 16.60 0.00	tblVehicleTrips	CC_TL	8.40	0.00
tbl/ehicleTrips CC_TTP 28.00 0.00 tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TTP 19.00 0.00 tbl/ehicleTrips CNW_TTP 13.00 0.00 tbl/ehicleTrips CNW_TTP 41.00 0.00 tbl/ehicleTrips CW_TL 16.60 0.00 <td>tblVehicleTrips</td> <td>CC_TL</td> <td>8.40</td> <td>0.00</td>	tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TT 16.60 0.00	tblVehicleTrips	CC_TTP	48.00	0.00
tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CC_TTP	28.00	0.00
tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TTP 19.00 0.00 tbl/ehicleTrips CNW_TTP 13.00 0.00 tbl/ehicleTrips CNW_TTP 41.00 0.00 tbl/ehicleTrips CW_TL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTL 16.60 0.00 tblVehicleTrips CW_TTL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tbl/VehicleTrips CNW_TL 6.90 0.00 tbl/VehicleTrips CNW_TTP 19.00 0.00 tbl/VehicleTrips CNW_TTP 13.00 0.00 tbl/VehicleTrips CNW_TTP 41.00 0.00 tbl/VehicleTrips CW_TL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTL 16.60 0.00 tblVehicleTrips CW_TTL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CNW_TTP	19.00	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CNW_TTP	13.00	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CNW_TTP	41.00	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CW_TL	16.60	0.00
ļ <u>i</u>	tblVehicleTrips	CW_TL	16.60	0.00
thl/ehiclaTrine CW TTD 50.00	tblVehicleTrips	CW_TTP	33.00	0.00
101Ve1110le111ps - GVV_11F 39.00 0.00	tblVehicleTrips	CW_TTP	59.00	0.00
tblVehicleTrips CW_TTP 59.00 0.00	tblVehicleTrips	CW_TTP	59.00	0.00
tblVehicleTrips DV_TP 28.00 0.00	tblVehicleTrips	DV_TP	28.00	0.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	DV_TP	5.00	0.00
tblVehicleTrips	DV_TP	5.00	0.00
tblVehicleTrips	PB_TP	6.00	0.00
tblVehicleTrips	PB_TP	3.00	0.00
tblVehicleTrips	PB_TP	3.00	0.00
tblVehicleTrips	PR_TP	66.00	0.00
tblVehicleTrips	PR_TP	92.00	0.00
tblVehicleTrips	PR_TP	92.00	0.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	ST_TR	6.42	0.00
tblVehicleTrips	ST_TR	2.12	0.00
tblVehicleTrips	SU_TR	2.19	0.00
tblVehicleTrips	SU_TR	5.09	0.00
tblVehicleTrips	SU_TR	2.12	0.00
tblVehicleTrips	WD_TR	0.78	0.00
tblVehicleTrips	WD_TR	3.93	0.00
tblVehicleTrips	WD_TR	2.12	0.00
tblWater	IndoorWaterUseRate	20,736,187.50	0.00
tblWater	IndoorWaterUseRate	2,303,250.00	0.00
tblWater	OutdoorWaterUseRate	941,270.27	0.00

2.0 Emissions Summary

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/c	lay		
2023	52.4298	51.3846	36.3037	0.1135	12.6373	1.9518	14.5890	4.2343	1.7983	6.0325	0.0000	11,321.46 39	11,321.46 39	2.5212	0.5561	11,550.19 87
Maximum	52.4298	51.3846	36.3037	0.1135	12.6373	1.9518	14.5890	4.2343	1.7983	6.0325	0.0000	11,321.46 39	11,321.46 39	2.5212	0.5561	11,550.19 87

Mitigated Construction

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/d	lay		
2023	52.4298	51.3846	36.3037	0.1135	5.6937	1.9518	7.6454	1.8604	1.7983	3.6587	0.0000	11,321.46 39	11,321.46 39	2.5212	0.5561	11,550.19 87
Maximum	52.4298	51.3846	36.3037	0.1135	5.6937	1.9518	7.6454	1.8604	1.7983	3.6587	0.0000	11,321.46 39	11,321.46 39	2.5212	0.5561	11,550.19 87

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	54.95	0.00	47.59	56.06	0.00	39.35	0.00	0.00	0.00	0.00	0.00	0.00

CalEEMod Version: CalEEMod.2020.4.0 Page 7 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Area	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Mobile	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total	2.3224	3.8000e- 004	0.0415	0.0000	0.0000	1.5000e- 004	1.5000e- 004	0.0000	1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004	0.0000	0.0949

Mitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Area	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Mobile	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total	2.3224	3.8000e- 004	0.0415	0.0000	0.0000	1.5000e- 004	1.5000e- 004	0.0000	1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004	0.0000	0.0949

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	2/1/2023	2/28/2023	5	20	
2	Grading	Grading	3/1/2023	3/31/2023	5	23	
3	Building Construction	Building Construction	4/1/2023	9/29/2023	5	130	
4	Paving	Paving	9/30/2023	10/13/2023	5	10	
5	Architectural Coating	Architectural Coating	10/14/2023	10/27/2023	5	10	

Acres of Grading (Site Preparation Phase): 20

Acres of Grading (Grading Phase): 115

Acres of Paving: 4.86

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 149,445; Non-Residential Outdoor: 49,815; Striped Parking Area: 12,700 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Grading	Other Construction Equipment	1	8.00	172	0.42
Site Preparation	Rubber Tired Dozers	0	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Paving	Skid Steer Loaders	1	8.00	65	0.37
Grading	Excavators	0	8.00	158	0.38
Grading	Graders	0	8.00	187	0.41

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	0	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	0	8.00	130	0.42
Paving	Paving Equipment	1	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	8.00	78	0.48
Site Preparation	Skid Steer Loaders	1	8.00	65	0.37
Grading	Scrapers	4	8.00	367	0.48
Paving	Other Construction Equipment	1	8.00	172	0.42

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation	2	5.00	6.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	7	18.00	7.00	1,325.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	7	145.00	38.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	5	13.00	3.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	29.00	3.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
Fugitive Dust					1.0605	0.0000	1.0605	0.1145	0.0000	0.1145			0.0000			0.0000
Off-Road	0.2165	2.4004	3.6167	5.1900e- 003		0.1051	0.1051		0.0967	0.0967		502.0627	502.0627	0.1624		506.1222
Total	0.2165	2.4004	3.6167	5.1900e- 003	1.0605	0.1051	1.1656	0.1145	0.0967	0.2112		502.0627	502.0627	0.1624		506.1222

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.7600e- 003	0.1960	0.0807	1.0500e- 003	0.0384	1.7100e- 003	0.0401	0.0111	1.6300e- 003	0.0127		111.1626	111.1626	1.1300e- 003	0.0164	116.0860
Worker	0.0183	0.0113	0.1834	4.9000e- 004	0.0559	2.6000e- 004	0.0562	0.0148	2.4000e- 004	0.0151		50.3102	50.3102	1.1500e- 003	1.1700e- 003	50.6884
Total	0.0250	0.2073	0.2641	1.5400e- 003	0.0943	1.9700e- 003	0.0963	0.0259	1.8700e- 003	0.0278		161.4728	161.4728	2.2800e- 003	0.0176	166.7745

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust	 				0.4136	0.0000	0.4136	0.0447	0.0000	0.0447			0.0000			0.0000
Off-Road	0.2165	2.4004	3.6167	5.1900e- 003		0.1051	0.1051		0.0967	0.0967	0.0000	502.0627	502.0627	0.1624	 	506.1222
Total	0.2165	2.4004	3.6167	5.1900e- 003	0.4136	0.1051	0.5187	0.0447	0.0967	0.1413	0.0000	502.0627	502.0627	0.1624		506.1222

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.7600e- 003	0.1960	0.0807	1.0500e- 003	0.0384	1.7100e- 003	0.0401	0.0111	1.6300e- 003	0.0127		111.1626	111.1626	1.1300e- 003	0.0164	116.0860
Worker	0.0183	0.0113	0.1834	4.9000e- 004	0.0559	2.6000e- 004	0.0562	0.0148	2.4000e- 004	0.0151		50.3102	50.3102	1.1500e- 003	1.1700e- 003	50.6884
Total	0.0250	0.2073	0.2641	1.5400e- 003	0.0943	1.9700e- 003	0.0963	0.0259	1.8700e- 003	0.0278		161.4728	161.4728	2.2800e- 003	0.0176	166.7745

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2023
<u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust					11.3830	0.0000	11.3830	3.8916	0.0000	3.8916			0.0000			0.0000
Off-Road	4.3434	45.3622	33.9672	0.0788		1.8794	1.8794		1.7290	1.7290		7,630.204 2	7,630.204 2	2.4678	 	7,691.898 3
Total	4.3434	45.3622	33.9672	0.0788	11.3830	1.8794	13.2623	3.8916	1.7290	5.6207		7,630.204 2	7,630.204 2	2.4678		7,691.898 3

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.1261	5.7530	1.5820	0.0317	1.0083	0.0694	1.0777	0.2764	0.0664	0.3429		3,380.453 4	3,380.453 4	0.0480	0.5327	3,540.388 4
Vendor	7.8900e- 003	0.2287	0.0942	1.2200e- 003	0.0448	1.9900e- 003	0.0468	0.0129	1.9100e- 003	0.0148		129.6897	129.6897	1.3200e- 003	0.0192	135.4337
Worker	0.0658	0.0406	0.6603	1.7700e- 003	0.2012	9.4000e- 004	0.2021	0.0534	8.7000e- 004	0.0542		181.1165	181.1165	4.1400e- 003	4.2200e- 003	182.4783
Total	0.1997	6.0224	2.3365	0.0347	1.2543	0.0724	1.3267	0.3427	0.0692	0.4119		3,691.259 6	3,691.259 6	0.0534	0.5561	3,858.300 4

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2023

<u>Mitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust) 				4.4394	0.0000	4.4394	1.5177	0.0000	1.5177			0.0000			0.0000
Off-Road	4.3434	45.3622	33.9672	0.0788		1.8794	1.8794		1.7290	1.7290	0.0000	7,630.204 2	7,630.204 2	2.4678		7,691.898 3
Total	4.3434	45.3622	33.9672	0.0788	4.4394	1.8794	6.3187	1.5177	1.7290	3.2468	0.0000	7,630.204 2	7,630.204 2	2.4678		7,691.898 3

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Hauling	0.1261	5.7530	1.5820	0.0317	1.0083	0.0694	1.0777	0.2764	0.0664	0.3429		3,380.453 4	3,380.453 4	0.0480	0.5327	3,540.388 4
Vendor	7.8900e- 003	0.2287	0.0942	1.2200e- 003	0.0448	1.9900e- 003	0.0468	0.0129	1.9100e- 003	0.0148		129.6897	129.6897	1.3200e- 003	0.0192	135.4337
Worker	0.0658	0.0406	0.6603	1.7700e- 003	0.2012	9.4000e- 004	0.2021	0.0534	8.7000e- 004	0.0542		181.1165	181.1165	4.1400e- 003	4.2200e- 003	182.4783
Total	0.1997	6.0224	2.3365	0.0347	1.2543	0.0724	1.3267	0.3427	0.0692	0.4119		3,691.259 6	3,691.259 6	0.0534	0.5561	3,858.300 4

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	1.2162	11.1865	11.4094	0.0191		0.5440	0.5440		0.5049	0.5049		1,813.542 5	1,813.542 5	0.5421		1,827.094 2
Total	1.2162	11.1865	11.4094	0.0191		0.5440	0.5440		0.5049	0.5049		1,813.542 5	1,813.542 5	0.5421		1,827.094 2

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0428	1.2415	0.5112	6.6400e- 003	0.2434	0.0108	0.2542	0.0701	0.0103	0.0804		704.0298	704.0298	7.1800e- 003	0.1040	735.2116
Worker	0.5298	0.3274	5.3194	0.0143	1.6208	7.6000e- 003	1.6284	0.4298	7.0000e- 003	0.4368		1,458.994 4	1,458.994 4	0.0333	0.0340	1,469.964 2
Total	0.5726	1.5688	5.8306	0.0209	1.8642	0.0184	1.8826	0.4999	0.0173	0.5173		2,163.024 2	2,163.024 2	0.0405	0.1381	2,205.175 8

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
	1.2162	11.1865	11.4094	0.0191		0.5440	0.5440	1 1 1	0.5049	0.5049	0.0000	1,813.542 5	1,813.542 5	0.5421		1,827.094 2
Total	1.2162	11.1865	11.4094	0.0191		0.5440	0.5440		0.5049	0.5049	0.0000	1,813.542 5	1,813.542 5	0.5421		1,827.094 2

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0428	1.2415	0.5112	6.6400e- 003	0.2434	0.0108	0.2542	0.0701	0.0103	0.0804		704.0298	704.0298	7.1800e- 003	0.1040	735.2116
Worker	0.5298	0.3274	5.3194	0.0143	1.6208	7.6000e- 003	1.6284	0.4298	7.0000e- 003	0.4368		1,458.994 4	1,458.994 4	0.0333	0.0340	1,469.964 2
Total	0.5726	1.5688	5.8306	0.0209	1.8642	0.0184	1.8826	0.4999	0.0173	0.5173		2,163.024 2	2,163.024	0.0405	0.1381	2,205.175 8

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023
<u>Unmitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Off-Road	0.8876	9.0845	11.5997	0.0175		0.4613	0.4613		0.4244	0.4244		1,694.065 1	1,694.065 1	0.5479		1,707.762 5
Paving	1.2733					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.1609	9.0845	11.5997	0.0175		0.4613	0.4613		0.4244	0.4244		1,694.065 1	1,694.065 1	0.5479		1,707.762 5

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Verider	3.3800e- 003	0.0980	0.0404	5.2000e- 004	0.0192	8.5000e- 004	0.0201	5.5300e- 003	8.2000e- 004	6.3500e- 003		55.5813	55.5813	5.7000e- 004	8.2100e- 003	58.0430
Worker	0.0475	0.0294	0.4769	1.2800e- 003	0.1453	6.8000e- 004	0.1460	0.0385	6.3000e- 004	0.0392		130.8064	130.8064	2.9900e- 003	3.0500e- 003	131.7899
Total	0.0509	0.1274	0.5173	1.8000e- 003	0.1645	1.5300e- 003	0.1661	0.0441	1.4500e- 003	0.0455		186.3877	186.3877	3.5600e- 003	0.0113	189.8329

CalEEMod Version: CalEEMod.2020.4.0 Page 17 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

<u>Mitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Off-Road	0.8876	9.0845	11.5997	0.0175		0.4613	0.4613		0.4244	0.4244	0.0000	1,694.065 1	1,694.065 1	0.5479		1,707.762 5
Paving	1.2733					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.1609	9.0845	11.5997	0.0175		0.4613	0.4613		0.4244	0.4244	0.0000	1,694.065 1	1,694.065 1	0.5479		1,707.762 5

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	3.3800e- 003	0.0980	0.0404	5.2000e- 004	0.0192	8.5000e- 004	0.0201	5.5300e- 003	8.2000e- 004	6.3500e- 003		55.5813	55.5813	5.7000e- 004	8.2100e- 003	58.0430
Worker	0.0475	0.0294	0.4769	1.2800e- 003	0.1453	6.8000e- 004	0.1460	0.0385	6.3000e- 004	0.0392		130.8064	130.8064	2.9900e- 003	3.0500e- 003	131.7899
Total	0.0509	0.1274	0.5173	1.8000e- 003	0.1645	1.5300e- 003	0.1661	0.0441	1.4500e- 003	0.0455		186.3877	186.3877	3.5600e- 003	0.0113	189.8329

CalEEMod Version: CalEEMod.2020.4.0 Page 18 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Archit. Coating	52.0650					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253
Total	52.3205	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day					lb/d	lay				
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	3.3800e- 003	0.0980	0.0404	5.2000e- 004	0.0192	8.5000e- 004	0.0201	5.5300e- 003	8.2000e- 004	6.3500e- 003		55.5813	55.5813	5.7000e- 004	8.2100e- 003	58.0430
Worker	0.1060	0.0655	1.0639	2.8500e- 003	0.3242	1.5200e- 003	0.3257	0.0860	1.4000e- 003	0.0874		291.7989	291.7989	6.6600e- 003	6.8000e- 003	293.9928
Total	0.1093	0.1635	1.1043	3.3700e- 003	0.3434	2.3700e- 003	0.3457	0.0915	2.2200e- 003	0.0937		347.3802	347.3802	7.2300e- 003	0.0150	352.0359

CalEEMod Version: CalEEMod.2020.4.0 Page 19 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023 Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
Archit. Coating	52.0650					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003	i I	0.0944	0.0944	 	0.0944	0.0944	0.0000	375.2641	375.2641	0.0225	i i	375.8253
Total	52.3205	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
T VOLIGO	3.3800e- 003	0.0980	0.0404	5.2000e- 004	0.0192	8.5000e- 004	0.0201	5.5300e- 003	8.2000e- 004	6.3500e- 003		55.5813	55.5813	5.7000e- 004	8.2100e- 003	58.0430
Worker	0.1060	0.0655	1.0639	2.8500e- 003	0.3242	1.5200e- 003	0.3257	0.0860	1.4000e- 003	0.0874		291.7989	291.7989	6.6600e- 003	6.8000e- 003	293.9928
Total	0.1093	0.1635	1.1043	3.3700e- 003	0.3434	2.3700e- 003	0.3457	0.0915	2.2200e- 003	0.0937		347.3802	347.3802	7.2300e- 003	0.0150	352.0359

CalEEMod Version: CalEEMod.2020.4.0 Page 20 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e			
Category	lb/day												lb/day						
Mitigated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000			
Unmitigated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000			

4.2 Trip Summary Information

	Avei	age Daily Trip Ra	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	0.00		
General Heavy Industry	0.00	0.00	0.00		
Other Asphalt Surfaces	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
Refrigerated Warehouse-No Rail	0.00	0.00	0.00		
Total	0.00	0.00	0.00		

4.3 Trip Type Information

		Miles			Trip %		Trip Purpose %					
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by			
City Park	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0			
General Heavy Industry	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0			

CalEEMod Version: CalEEMod.2020.4.0 Page 21 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

		Miles			Trip %		Trip Purpose %				
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by		
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0		
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0		
Refrigerated Warehouse-No	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0		

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
City Park	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
General Heavy Industry	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Other Asphalt Surfaces	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Refrigerated Warehouse-No Rail	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

CalEEMod Version: CalEEMod.2020.4.0 Page 22 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e		
Category	lb/day											lb/day						
	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000		
Unmitigated	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000		

5.2 Energy by Land Use - NaturalGas

<u>Unmitigated</u>

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	lb/day										
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
General Heavy Industry	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Refrigerated Warehouse-No Rail	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 23 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	lb/day										
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
General Heavy Industry	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Refrigerated Warehouse-No Rail	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

6.0 Area Detail

6.1 Mitigation Measures Area

CalEEMod Version: CalEEMod.2020.4.0 Page 24 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Mitigated	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Unmitigated	2.3224	3.8000e- 004	0.0415	0.0000	 	1.5000e- 004	1.5000e- 004	i i	1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating	0.2692					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	2.0494					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	3.8500e- 003	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Total	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949

CalEEMod Version: CalEEMod.2020.4.0 Page 25 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
	0.2692					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
	2.0494					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	3.8500e- 003	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004	 	1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Total	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949

7.0 Water Detail

7.1 Mitigation Measures Water

CalEEMod Version: CalEEMod.2020.4.0 Page 26 of 26 Date: 3/10/2022 5:11 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

CalEEMod Version: CalEEMod.2020.4.0 Page 1 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Cottonwood & Edgemont (Construction - Unmitigated)

Riverside-South Coast County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Heavy Industry	89.67	1000sqft	2.06	89,667.00	0
Refrigerated Warehouse-No Rail	9.96	1000sqft	0.23	9,963.00	0
Other Asphalt Surfaces	176.40	1000sqft	4.05	176,404.00	0
Parking Lot	130.00	Space	0.81	35,264.00	0
City Park	0.79	Acre	0.79	34,588.00	0

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N20 Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project area is 7.94 acres

Construction Phase - Construction schedule based on information provided by the Project Applicant

Off-road Equipment - Construction equipment adjusted based on the changes made to the Construction Schedule

Off-road Equipment - Equipment based on information provided by the Project Applicant

Off-road Equipment - Equipment based on information provided by the Project Applicant

Off-road Equipment - Equipment based on information provided by the Project Applicant

Off-road Equipment - Equipment based on information provided by the Project Applicant

Date: 3/10/2022 5:10 PM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Trips and VMT - CalEEMod only assumes Vendor Trips during Building Construction. The CalEEMod default trips were ratioed between each phase based on the number of days

Grading - As a conservative measure, it is assumed that up to 1 acre can be disturbed per day during Site Preparation activities

Architectural Coating - Rule 1113

Vehicle Trips - Construction run only

Energy Use - Construction run only

Water And Wastewater - Construction run only

Solid Waste - Construction run only

Construction Off-road Equipment Mitigation - Rule 403

Table Name	Column Name	Default Value	New Value
tblArchitecturalCoating	EF_Nonresidential_Exterior	100.00	50.00
tblArchitecturalCoating	EF_Nonresidential_Interior	100.00	50.00
tblConstructionPhase	NumDays	10.00	20.00
tblConstructionPhase	NumDays	20.00	23.00
tblConstructionPhase	NumDays	230.00	130.00
tblConstructionPhase	NumDays	20.00	10.00
tblConstructionPhase	NumDays	20.00	10.00
tblEnergyUse	LightingElect	2.93	0.00
tblEnergyUse	LightingElect	0.35	0.00
tblEnergyUse	LightingElect	2.37	0.00
tblEnergyUse	NT24E	5.02	0.00
tblEnergyUse	NT24E	36.52	0.00
tblEnergyUse	NT24NG	17.13	0.00
tblEnergyUse	NT24NG	48.51	0.00
tblEnergyUse	T24E	1.97	0.00
tblEnergyUse	T24E	0.95	0.00
tblEnergyUse	T24NG	15.20	0.00
tblEnergyUse	T24NG	3.22	0.00
tblGrading	AcresOfGrading	103.50	115.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblGrading	AcresOfGrading	0.00	20.00
tblGrading	MaterialExported	0.00	10,600.00
tblLandUse	LandUseSquareFeet	52,000.00	35,264.00
tblLandUse	LandUseSquareFeet	34,412.40	34,588.00
tblLandUse	LotAcreage	1.17	0.81
tblOffRoadEquipment	LoadFactor	0.42	0.42
tblOffRoadEquipment	LoadFactor	0.37	0.37
tblOffRoadEquipment	LoadFactor	0.48	0.48
tblOffRoadEquipment	LoadFactor	0.42	0.42
tblOffRoadEquipment	OffRoadEquipmentType		Other Construction Equipment
tblOffRoadEquipment	OffRoadEquipmentType		Skid Steer Loaders
tblOffRoadEquipment	OffRoadEquipmentType		Skid Steer Loaders
tblOffRoadEquipment	OffRoadEquipmentType		Scrapers
tblOffRoadEquipment	OffRoadEquipmentType		Other Construction Equipment
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	1.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	1.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	4.00	1.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblSolidWaste	SolidWasteGenerationRate	0.07	0.00
tblSolidWaste	SolidWasteGenerationRate	111.19	0.00
tblSolidWaste	SolidWasteGenerationRate	9.36	0.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

International Content				
tbTripsAndVMT VendorTripNumber 57.00 38.00 tbTripsAndVMT VendorTripNumber 0.00 3.00 tbTripsAndVMT VendorTripNumber 0.00 3.00 tbVehicleTrips CC_TL 8.40 0.00 tbVehicleTrips CC_TTP 48.00 0.00 tbVehicleTrips CC_TTP 28.00 0.00 tbVehicleTrips CNW_TL 6.90 0.00 tbVehicleTrips CNW_TL 6.90 0.00 tbVehicleTrips CNW_TL 6.90 0.00 tbVehicleTrips CNW_TTP 19.00 0.00 tbVehicleTrips CNW_TTP 19.00 0.00 tbVehicleTrips CNW_TTP 110.60 0.00	tblTripsAndVMT	VendorTripNumber	0.00	6.00
tbITripsAndVMT VendorTripNumber 0.00 3.00 tbITripsAndVMT VendorTripNumber 0.00 3.00 tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TTP 48.00 0.00 tbIVehicleTrips CC_TTP 28.00 0.00 tbIVehicleTrips CNW_TL 6.90 0.00	tblTripsAndVMT	VendorTripNumber	0.00	7.00
biffripsAndVMT VendorTripNumber 0.00 3.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TTP 48.00 0.00 tblVehicleTrips CC_TTP 28.00 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00	tblTripsAndVMT	VendorTripNumber	57.00	38.00
tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TTP 48.00 0.00 tblVehicleTrips CC_TTP 28.00 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00	tblTripsAndVMT	VendorTripNumber	0.00	3.00
tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TL 8.40 0.00 tbIVehicleTrips CC_TTP 48.00 0.00 tbIVehicleTrips CC_TTP 28.00 0.00 tbIVehicleTrips CNW_TL 6.90 0.00 tbIVehicleTrips CNW_TTP 19.00 0.00 tbIVehicleTrips CNW_TTP 13.00 0.00 tbIVehicleTrips CW_TL 16.60 0.00 tbIVehicleTrips CW_TL 16.60 0.00 tbIVehicleTrips CW_TL 16.60 0.00	tblTripsAndVMT	VendorTripNumber	0.00	3.00
tbl/VehicleTrips CC_TL 8.40 0.00 tbl/VehicleTrips CC_TL 8.40 0.00 tbl/VehicleTrips CC_TTP 8.40 0.00 tbl/VehicleTrips CC_TTP 48.00 0.00 tbl/VehicleTrips CC_TTP 28.00 0.00 tbl/VehicleTrips CNW_TL 6.90 0.00 tbl/VehicleTrips CNW_TTP 19.00 0.00 tbl/VehicleTrips CNW_TTP 13.00 0.00 tbl/VehicleTrips CW_TL 16.60 0.00 tbl/VehicleTrips CW_TL 16.60 0.00 tbl/VehicleTrips CW_TL 16.60 0.00 tbl/VehicleTrips CW_TL 16.60 0.0	tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips CC_TL 8.40 0.00 tblVehicleTrips CC_TTP 8.40 0.00 tblVehicleTrips CC_TTP 48.00 0.00 tblVehicleTrips CC_TTP 28.00 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 <td>tblVehicleTrips</td> <td>CC_TL</td> <td>8.40</td> <td>0.00</td>	tblVehicleTrips	CC_TL	8.40	0.00
tbl/ehicleTrips CC_TL 8.40 0.00 tbl/ehicleTrips CC_TTP 48.00 0.00 tbl/ehicleTrips C_TTP 28.00 0.00 tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TTP 19.00 0.00 tbl/ehicleTrips CNW_TTP 13.00 0.00 tbl/ehicleTrips CW_TL 16.60 0.00	tblVehicleTrips	CC_TL	8.40	0.00
tbIVehicleTrips CC_TTP 48.00 0.00 tbIVehicleTrips CC_TTP 28.00 0.00 tbIVehicleTrips CNW_TL 6.90 0.00 tbIVehicleTrips CNW_TTP 19.00 0.00 tbIVehicleTrips CNW_TTP 13.00 0.00 tbIVehicleTrips CNW_TTP 41.00 0.00 tbIVehicleTrips CW_TL 16.60 0.00 tbIVehicleTrips CW_TTL 16.60 0.00	tblVehicleTrips	CC_TL	8.40	0.00
tbl/ehicleTrips CC_TTP 28.00 0.00 tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TTP 19.00 0.00 tbl/ehicleTrips CNW_TTP 13.00 0.00 tbl/ehicleTrips CNW_TTP 41.00 0.00 tbl/ehicleTrips CW_TL 16.60 0.00 <td>tblVehicleTrips</td> <td>CC_TL</td> <td>8.40</td> <td>0.00</td>	tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TT 16.60 0.00	tblVehicleTrips	CC_TTP	48.00	0.00
tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CC_TTP	28.00	0.00
tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TL 6.90 0.00 tbl/ehicleTrips CNW_TTP 19.00 0.00 tbl/ehicleTrips CNW_TTP 13.00 0.00 tbl/ehicleTrips CNW_TTP 41.00 0.00 tbl/ehicleTrips CW_TL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TL 6.90 0.00 tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTL 16.60 0.00 tblVehicleTrips CW_TTL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tbl/VehicleTrips CNW_TL 6.90 0.00 tbl/VehicleTrips CNW_TTP 19.00 0.00 tbl/VehicleTrips CNW_TTP 13.00 0.00 tbl/VehicleTrips CNW_TTP 41.00 0.00 tbl/VehicleTrips CW_TL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips CNW_TTP 19.00 0.00 tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips CNW_TTP 13.00 0.00 tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTL 16.60 0.00 tblVehicleTrips CW_TTL 16.60 0.00	tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips CNW_TTP 41.00 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CNW_TTP	19.00	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CNW_TTP	13.00	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CNW_TTP	41.00	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips CW_TL 16.60 0.00 tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips CW_TTP 33.00 0.00	tblVehicleTrips	CW_TL	16.60	0.00
ļ <u>i</u>	tblVehicleTrips	CW_TL	16.60	0.00
thl/ehiclaTrine CW TTD 50.00	tblVehicleTrips	CW_TTP	33.00	0.00
101Ve1110le111ps - GVV_11F 39.00 0.00	tblVehicleTrips	CW_TTP	59.00	0.00
tblVehicleTrips CW_TTP 59.00 0.00	tblVehicleTrips	CW_TTP	59.00	0.00
tblVehicleTrips DV_TP 28.00 0.00	tblVehicleTrips	DV_TP	28.00	0.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	DV_TP	5.00	0.00
tblVehicleTrips	DV_TP	5.00	0.00
tblVehicleTrips	PB_TP	6.00	0.00
tblVehicleTrips	PB_TP	3.00	0.00
tblVehicleTrips	PB_TP	3.00	0.00
tblVehicleTrips	PR_TP	66.00	0.00
tblVehicleTrips	PR_TP	92.00	0.00
tblVehicleTrips	PR_TP	92.00	0.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	ST_TR	6.42	0.00
tblVehicleTrips	ST_TR	2.12	0.00
tblVehicleTrips	SU_TR	2.19	0.00
tblVehicleTrips	SU_TR	5.09	0.00
tblVehicleTrips	SU_TR	2.12	0.00
tblVehicleTrips	WD_TR	0.78	0.00
tblVehicleTrips	WD_TR	3.93	0.00
tblVehicleTrips	WD_TR	2.12	0.00
tblWater	IndoorWaterUseRate	20,736,187.50	0.00
tblWater	IndoorWaterUseRate	2,303,250.00	0.00
tblWater	OutdoorWaterUseRate	941,270.27	0.00

2.0 Emissions Summary

CalEEMod Version: CalEEMod.2020.4.0 Page 6 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/c	lay		
2023	52.4229	51.7428	36.2161	0.1133	12.6373	1.9519	14.5891	4.2343	1.7984	6.0326	0.0000	11,310.06 38	11,310.06 38	2.5206	0.5571	11,539.08 30
Maximum	52.4229	51.7428	36.2161	0.1133	12.6373	1.9519	14.5891	4.2343	1.7984	6.0326	0.0000	11,310.06 38	11,310.06 38	2.5206	0.5571	11,539.08 30

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/c	lay		
2023	52.4229	51.7428	36.2161	0.1133	5.6937	1.9519	7.6455	1.8604	1.7984	3.6588	0.0000	11,310.06 38	11,310.06 38	2.5206	0.5571	11,539.08 30
Maximum	52.4229	51.7428	36.2161	0.1133	5.6937	1.9519	7.6455	1.8604	1.7984	3.6588	0.0000	11,310.06 38	11,310.06 38	2.5206	0.5571	11,539.08 30

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	54.95	0.00	47.59	56.06	0.00	39.35	0.00	0.00	0.00	0.00	0.00	0.00

CalEEMod Version: CalEEMod.2020.4.0 Page 7 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day				lb/d	day					
Area	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Mobile	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total	2.3224	3.8000e- 004	0.0415	0.0000	0.0000	1.5000e- 004	1.5000e- 004	0.0000	1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004	0.0000	0.0949

Mitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Area	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Energy	0.0000	0.0000	0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Mobile	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total	2.3224	3.8000e- 004	0.0415	0.0000	0.0000	1.5000e- 004	1.5000e- 004	0.0000	1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004	0.0000	0.0949

Date: 3/10/2022 5:10 PM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	2/1/2023	2/28/2023	5	20	
2	Grading	Grading	3/1/2023	3/31/2023	5	23	
3	Building Construction	Building Construction	4/1/2023	9/29/2023	5	130	
4	Paving	Paving	9/30/2023	10/13/2023	5	10	
5	Architectural Coating	Architectural Coating	10/14/2023	10/27/2023	5	10	

Acres of Grading (Site Preparation Phase): 20

Acres of Grading (Grading Phase): 115

Acres of Paving: 4.86

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 149,445; Non-Residential Outdoor: 49,815; Striped Parking Area: 12,700 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Grading	Other Construction Equipment	1	8.00	172	0.42
Site Preparation	Rubber Tired Dozers	0	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Paving	Skid Steer Loaders	1	8.00	65	0.37
Grading	Excavators	0	8.00	158	0.38
Grading	Graders	0	8.00	187	0.41

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	0	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	0	8.00	130	0.42
Paving	Paving Equipment	1	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	8.00	78	0.48
Site Preparation	Skid Steer Loaders	1	8.00	65	0.37
Grading	Scrapers	4	8.00	367	0.48
Paving	Other Construction Equipment	1	8.00	172	0.42

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation	2	5.00	6.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	7	18.00	7.00	1,325.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	7	145.00	38.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	5	13.00	3.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	29.00	3.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Fugitive Dust	 				1.0605	0.0000	1.0605	0.1145	0.0000	0.1145			0.0000			0.0000
Off-Road	0.2165	2.4004	3.6167	5.1900e- 003		0.1051	0.1051		0.0967	0.0967		502.0627	502.0627	0.1624		506.1222
Total	0.2165	2.4004	3.6167	5.1900e- 003	1.0605	0.1051	1.1656	0.1145	0.0967	0.2112		502.0627	502.0627	0.1624		506.1222

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
1	6.2600e- 003	0.2079	0.0834	1.0500e- 003	0.0384	1.7100e- 003	0.0401	0.0111	1.6400e- 003	0.0127		111.4385	111.4385	1.1100e- 003	0.0165	116.3777
Worker	0.0171	0.0117	0.1490	4.5000e- 004	0.0559	2.6000e- 004	0.0562	0.0148	2.4000e- 004	0.0151		45.5855	45.5855	1.1400e- 003	1.2000e- 003	45.9719
Total	0.0234	0.2196	0.2324	1.5000e- 003	0.0943	1.9700e- 003	0.0963	0.0259	1.8800e- 003	0.0278		157.0240	157.0240	2.2500e- 003	0.0177	162.3496

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					0.4136	0.0000	0.4136	0.0447	0.0000	0.0447			0.0000			0.0000
Off-Road	0.2165	2.4004	3.6167	5.1900e- 003		0.1051	0.1051		0.0967	0.0967	0.0000	502.0627	502.0627	0.1624		506.1222
Total	0.2165	2.4004	3.6167	5.1900e- 003	0.4136	0.1051	0.5187	0.0447	0.0967	0.1413	0.0000	502.0627	502.0627	0.1624		506.1222

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
1	6.2600e- 003	0.2079	0.0834	1.0500e- 003	0.0384	1.7100e- 003	0.0401	0.0111	1.6400e- 003	0.0127		111.4385	111.4385	1.1100e- 003	0.0165	116.3777
Worker	0.0171	0.0117	0.1490	4.5000e- 004	0.0559	2.6000e- 004	0.0562	0.0148	2.4000e- 004	0.0151		45.5855	45.5855	1.1400e- 003	1.2000e- 003	45.9719
Total	0.0234	0.2196	0.2324	1.5000e- 003	0.0943	1.9700e- 003	0.0963	0.0259	1.8800e- 003	0.0278		157.0240	157.0240	2.2500e- 003	0.0177	162.3496

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2023
<u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust					11.3830	0.0000	11.3830	3.8916	0.0000	3.8916			0.0000			0.0000
Off-Road	4.3434	45.3622	33.9672	0.0788		1.8794	1.8794		1.7290	1.7290		7,630.204 2	7,630.204 2	2.4678	 	7,691.898 3
Total	4.3434	45.3622	33.9672	0.0788	11.3830	1.8794	13.2623	3.8916	1.7290	5.6207		7,630.204 2	7,630.204 2	2.4678		7,691.898 3

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.1159	6.0958	1.6153	0.0317	1.0083	0.0695	1.0778	0.2764	0.0665	0.3429		3,385.740 1	3,385.740 1	0.0475	0.5335	3,545.912 0
T VOLIGO	7.3100e- 003	0.2425	0.0973	1.2300e- 003	0.0448	2.0000e- 003	0.0468	0.0129	1.9100e- 003	0.0148		130.0116	130.0116	1.3000e- 003	0.0192	135.7739
Worker	0.0616	0.0422	0.5362	1.6000e- 003	0.2012	9.4000e- 004	0.2021	0.0534	8.7000e- 004	0.0542		164.1079	164.1079	4.1200e- 003	4.3200e- 003	165.4988
Total	0.1848	6.3805	2.2489	0.0345	1.2543	0.0725	1.3268	0.3427	0.0693	0.4120		3,679.859 5	3,679.859 5	0.0529	0.5571	3,847.184 7

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2023

<u>Mitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Fugitive Dust					4.4394	0.0000	4.4394	1.5177	0.0000	1.5177			0.0000			0.0000
Off-Road	4.3434	45.3622	33.9672	0.0788	 	1.8794	1.8794		1.7290	1.7290	0.0000	7,630.204 2	7,630.204 2	2.4678	 	7,691.898 3
Total	4.3434	45.3622	33.9672	0.0788	4.4394	1.8794	6.3187	1.5177	1.7290	3.2468	0.0000	7,630.204 2	7,630.204 2	2.4678		7,691.898 3

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.1159	6.0958	1.6153	0.0317	1.0083	0.0695	1.0778	0.2764	0.0665	0.3429		3,385.740 1	3,385.740 1	0.0475	0.5335	3,545.912 0
Vendor	7.3100e- 003	0.2425	0.0973	1.2300e- 003	0.0448	2.0000e- 003	0.0468	0.0129	1.9100e- 003	0.0148		130.0116	130.0116	1.3000e- 003	0.0192	135.7739
Worker	0.0616	0.0422	0.5362	1.6000e- 003	0.2012	9.4000e- 004	0.2021	0.0534	8.7000e- 004	0.0542		164.1079	164.1079	4.1200e- 003	4.3200e- 003	165.4988
Total	0.1848	6.3805	2.2489	0.0345	1.2543	0.0725	1.3268	0.3427	0.0693	0.4120		3,679.859 5	3,679.859 5	0.0529	0.5571	3,847.184 7

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	1.2162	11.1865	11.4094	0.0191		0.5440	0.5440		0.5049	0.5049		1,813.542 5	1,813.542 5	0.5421		1,827.094 2
Total	1.2162	11.1865	11.4094	0.0191		0.5440	0.5440		0.5049	0.5049		1,813.542 5	1,813.542 5	0.5421		1,827.094 2

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0397	1.3166	0.5284	6.6600e- 003	0.2434	0.0109	0.2542	0.0701	0.0104	0.0805		705.7770	705.7770	7.0400e- 003	0.1044	737.0585
Worker	0.4965	0.3397	4.3195	0.0129	1.6208	7.6000e- 003	1.6284	0.4298	7.0000e- 003	0.4368		1,321.980 0	1,321.980 0	0.0332	0.0348	1,333.184 8
Total	0.5362	1.6563	4.8479	0.0196	1.8642	0.0185	1.8826	0.4999	0.0174	0.5173		2,027.757 0	2,027.757 0	0.0402	0.1392	2,070.243 3

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
	1.2162	11.1865	11.4094	0.0191		0.5440	0.5440		0.5049	0.5049	0.0000	1,813.542 5	1,813.542 5	0.5421		1,827.094 2
Total	1.2162	11.1865	11.4094	0.0191		0.5440	0.5440		0.5049	0.5049	0.0000	1,813.542 5	1,813.542 5	0.5421		1,827.094 2

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0397	1.3166	0.5284	6.6600e- 003	0.2434	0.0109	0.2542	0.0701	0.0104	0.0805		705.7770	705.7770	7.0400e- 003	0.1044	737.0585
Worker	0.4965	0.3397	4.3195	0.0129	1.6208	7.6000e- 003	1.6284	0.4298	7.0000e- 003	0.4368		1,321.980 0	1,321.980 0	0.0332	0.0348	1,333.184 8
Total	0.5362	1.6563	4.8479	0.0196	1.8642	0.0185	1.8826	0.4999	0.0174	0.5173		2,027.757 0	2,027.757 0	0.0402	0.1392	2,070.243 3

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023
<u>Unmitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Off-Road	0.8876	9.0845	11.5997	0.0175		0.4613	0.4613		0.4244	0.4244		1,694.065 1	1,694.065 1	0.5479		1,707.762 5
Paving	1.2733					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.1609	9.0845	11.5997	0.0175		0.4613	0.4613		0.4244	0.4244		1,694.065 1	1,694.065 1	0.5479		1,707.762 5

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
1 -	3.1300e- 003	0.1039	0.0417	5.3000e- 004	0.0192	8.6000e- 004	0.0201	5.5300e- 003	8.2000e- 004	6.3500e- 003		55.7192	55.7192	5.6000e- 004	8.2400e- 003	58.1888
Worker	0.0445	0.0305	0.3873	1.1600e- 003	0.1453	6.8000e- 004	0.1460	0.0385	6.3000e- 004	0.0392		118.5223	118.5223	2.9800e- 003	3.1200e- 003	119.5269
Total	0.0477	0.1344	0.4290	1.6900e- 003	0.1645	1.5400e- 003	0.1661	0.0441	1.4500e- 003	0.0455		174.2416	174.2416	3.5400e- 003	0.0114	177.7157

CalEEMod Version: CalEEMod.2020.4.0 Page 17 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

<u>Mitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Off-Road	0.8876	9.0845	11.5997	0.0175		0.4613	0.4613		0.4244	0.4244	0.0000	1,694.065 1	1,694.065 1	0.5479		1,707.762 5
Paving	1.2733					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.1609	9.0845	11.5997	0.0175		0.4613	0.4613		0.4244	0.4244	0.0000	1,694.065 1	1,694.065 1	0.5479		1,707.762 5

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	3.1300e- 003	0.1039	0.0417	5.3000e- 004	0.0192	8.6000e- 004	0.0201	5.5300e- 003	8.2000e- 004	6.3500e- 003		55.7192	55.7192	5.6000e- 004	8.2400e- 003	58.1888
Worker	0.0445	0.0305	0.3873	1.1600e- 003	0.1453	6.8000e- 004	0.1460	0.0385	6.3000e- 004	0.0392		118.5223	118.5223	2.9800e- 003	3.1200e- 003	119.5269
Total	0.0477	0.1344	0.4290	1.6900e- 003	0.1645	1.5400e- 003	0.1661	0.0441	1.4500e- 003	0.0455		174.2416	174.2416	3.5400e- 003	0.0114	177.7157

CalEEMod Version: CalEEMod.2020.4.0 Page 18 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
Archit. Coating	52.0650					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225	 	375.8253
Total	52.3205	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	3.1300e- 003	0.1039	0.0417	5.3000e- 004	0.0192	8.6000e- 004	0.0201	5.5300e- 003	8.2000e- 004	6.3500e- 003		55.7192	55.7192	5.6000e- 004	8.2400e- 003	58.1888
Worker	0.0993	0.0679	0.8639	2.5800e- 003	0.3242	1.5200e- 003	0.3257	0.0860	1.4000e- 003	0.0874		264.3960	264.3960	6.6400e- 003	6.9600e- 003	266.6370
Total	0.1024	0.1719	0.9056	3.1100e- 003	0.3434	2.3800e- 003	0.3457	0.0915	2.2200e- 003	0.0937		320.1152	320.1152	7.2000e- 003	0.0152	324.8258

CalEEMod Version: CalEEMod.2020.4.0 Page 19 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023 Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
Archit. Coating	52.0650					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003	i I	0.0944	0.0944	 	0.0944	0.0944	0.0000	375.2641	375.2641	0.0225	i i	375.8253
Total	52.3205	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	3.1300e- 003	0.1039	0.0417	5.3000e- 004	0.0192	8.6000e- 004	0.0201	5.5300e- 003	8.2000e- 004	6.3500e- 003		55.7192	55.7192	5.6000e- 004	8.2400e- 003	58.1888
Worker	0.0993	0.0679	0.8639	2.5800e- 003	0.3242	1.5200e- 003	0.3257	0.0860	1.4000e- 003	0.0874		264.3960	264.3960	6.6400e- 003	6.9600e- 003	266.6370
Total	0.1024	0.1719	0.9056	3.1100e- 003	0.3434	2.3800e- 003	0.3457	0.0915	2.2200e- 003	0.0937		320.1152	320.1152	7.2000e- 003	0.0152	324.8258

CalEEMod Version: CalEEMod.2020.4.0 Page 20 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Mitigated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unmitigated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

4.2 Trip Summary Information

	Avei	age Daily Trip Ra	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	0.00		
General Heavy Industry	0.00	0.00	0.00		
Other Asphalt Surfaces	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
Refrigerated Warehouse-No Rail	0.00	0.00	0.00		
Total	0.00	0.00	0.00		

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
City Park	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0
General Heavy Industry	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0

CalEEMod Version: CalEEMod.2020.4.0 Page 21 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0
Refrigerated Warehouse-No	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
City Park	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
General Heavy Industry	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Other Asphalt Surfaces	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Refrigerated Warehouse-No Rail	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

CalEEMod Version: CalEEMod.2020.4.0 Page 22 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
NaturalGas Mitigated		0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
NaturalGas Unmitigated		0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	day		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
General Heavy Industry	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Refrigerated Warehouse-No Rail	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 23 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
General Heavy Industry	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Refrigerated Warehouse-No Rail	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

6.0 Area Detail

6.1 Mitigation Measures Area

CalEEMod Version: CalEEMod.2020.4.0 Page 24 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Mitigated	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Unmitigated	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
	0.2692					0.0000	0.0000		0.0000	0.0000	! !		0.0000			0.0000
	2.0494					0.0000	0.0000		0.0000	0.0000		,	0.0000			0.0000
Landscaping	3.8500e- 003	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Total	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949

CalEEMod Version: CalEEMod.2020.4.0 Page 25 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Coating	0.2692					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
	2.0494					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
'	3.8500e- 003	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949
Total	2.3224	3.8000e- 004	0.0415	0.0000		1.5000e- 004	1.5000e- 004		1.5000e- 004	1.5000e- 004		0.0890	0.0890	2.3000e- 004		0.0949

7.0 Water Detail

7.1 Mitigation Measures Water

CalEEMod Version: CalEEMod.2020.4.0 Page 26 of 26 Date: 3/10/2022 5:10 PM

Cottonwood & Edgemont (Construction - Unmitigated) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

This page intentionally left blank



APPENDIX 3.2:

CALEEMOD GENERAL LIGHT INDUSTRIAL OPERATIONAL EMISSIONS MODEL OUTPUTS



EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Cottonwood & Edgemont (General Light Industrial Operations)

Riverside-South Coast County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Heavy Industry	89.67	1000sqft	2.06	89,667.00	0
User Defined Industrial	89.67	User Defined Unit	0.00	0.00	0
Other Asphalt Surfaces	176.40	1000sqft	4.05	176,404.00	0
Parking Lot	130.00	Space	0.81	35,264.00	0
City Park	0.79	Acre	0.79	34,588.00	0

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edisc	nn			

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N20 Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project area (without High-Cube Cold Storage use) is 7.71 acres

Construction Phase - Operations run only

Off-road Equipment - Operations run only

Vehicle Trips - Trip characteristics based on information provided in the Traffic analysis

Operational Off-Road Equipment - Based on SCAQMD High Cube Warehouse Truck Trip Study White Paper Summary of Busniess Survey Results (2014)

Fleet Mix - Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic analysis

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Table Name	Column Name	Default Value	New Value			
tblConstructionPhase	NumDays	20.00	0.00			
tblFleetMix	HHD	0.02	0.00			
tblFleetMix	HHD	0.02	0.58			
tblFleetMix	LDA	0.53	0.58			
tblFleetMix	LDA	0.53	0.00			
tblFleetMix	LDT1	0.06	0.06			
tblFleetMix	LDT1	0.06	0.00			
tblFleetMix	LDT2	0.17	0.19			
tblFleetMix	LDT2	0.17	0.00			
tblFleetMix	LHD1	0.03	0.00			
tblFleetMix	LHD1	0.03	0.13			
tblFleetMix	LHD2	7.3100e-003	0.00			
tblFleetMix	LHD2	7.3100e-003	0.04			
tblFleetMix	MCY	0.02	0.03			
tblFleetMix	MCY	0.02	0.00			
tblFleetMix	MDV	0.14	0.15			
tblFleetMix	MDV	0.14	0.00			
tblFleetMix	MH	5.4680e-003	0.00			
tblFleetMix	MH	5.4680e-003	0.00			
tblFleetMix	MHD	0.01	0.00			
tblFleetMix	MHD	0.01	0.25			
tblFleetMix	OBUS	6.1600e-004	0.00			
tblFleetMix	OBUS	6.1600e-004	0.00			
tblFleetMix	SBUS	1.1000e-003	0.00			
tblFleetMix	SBUS	1.1000e-003	0.00			
tblFleetMix	UBUS	3.1500e-004	0.00			
tblFleetMix	UBUS	3.1500e-004	0.00			
tblLandUse	LandUseSquareFeet	52,000.00	35,264.00			

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblLandUse	LandUseSquareFeet	34,412.40	34,588.00
tblLandUse	LotAcreage	1.17	0.81
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOperationalOffRoadEquipment	OperDaysPerYear	260.00	365.00
tblOperationalOffRoadEquipment	OperFuelType	Diesel	CNG
tblOperationalOffRoadEquipment	OperHorsePower	97.00	200.00
tblOperationalOffRoadEquipment	OperHoursPerDay	8.00	4.00
tblOperationalOffRoadEquipment	OperOffRoadEquipmentNumber	0.00	2.00
tblVehicleTrips	CC_TTP	48.00	0.00
tblVehicleTrips	CNW_TTP	19.00	0.00
tblVehicleTrips	CW_TL	16.60	26.84
tblVehicleTrips	CW_TTP	33.00	0.00
tblVehicleTrips	CW_TTP	0.00	100.00
tblVehicleTrips	DV_TP	28.00	0.00
tblVehicleTrips	PB_TP	6.00	0.00
tblVehicleTrips	PR_TP	66.00	0.00
tblVehicleTrips	PR_TP	0.00	100.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	ST_TR	6.42	0.39
tblVehicleTrips	ST_TR	0.00	0.02
tblVehicleTrips	SU_TR	2.19	0.00
tblVehicleTrips	SU_TR	5.09	0.16
tblVehicleTrips	SU_TR	0.00	9.1000e-003
tblVehicleTrips	WD_TR	0.78	0.00
tblVehicleTrips	WD_TR	3.93	4.62
tblVehicleTrips	WD_TR	0.00	0.27

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.0 Emissions Summary

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
Year	lb/day										lb/day						
2023	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	

Mitigated Construction

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day									lb/day						
2023	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e		
Category	lb/day										lb/day							
Area	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004	1 1 1	1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135		
Energy	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592	 	0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391		
Mobile	1.6086	3.4016	17.8571	0.0491	4.3957	0.0454	4.4411	1.1741	0.0429	1.2169		5,076.434 0	5,076.434 0	0.1896	0.3237	5,177.647 0		
Offroad	0.2207	2.0721	1.4984	6.3300e- 003		0.0752	0.0752	 	0.0692	0.0692	0.0000	613.0902	613.0902	0.1983		618.0473		
Total	4.0155	6.2529	20.0593	0.0601	4.3957	0.1800	4.5756	1.1741	0.1714	1.3455	0.0000	6,624.017 1	6,624.017 1	0.4061	0.3409	6,735.746 8		

CalEEMod Version: CalEEMod.2020.4.0 Page 6 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Area	2.1006	4.5000e- 004	0.0497	0.0000	 	1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Energy	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
Mobile	1.6086	3.4016	17.8571	0.0491	4.3957	0.0454	4.4411	1.1741	0.0429	1.2169		5,076.434 0	5,076.434 0	0.1896	0.3237	5,177.647 0
Offroad	0.2207	2.0721	1.4984	6.3300e- 003		0.0752	0.0752		0.0692	0.0692	0.0000	613.0902	613.0902	0.1983		618.0473
Total	4.0155	6.2529	20.0593	0.0601	4.3957	0.1800	4.5756	1.1741	0.1714	1.3455	0.0000	6,624.017 1	6,624.017 1	0.4061	0.3409	6,735.746 8

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

	nase ımber	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1		Demolition	Demolition	2/1/2023	1/31/2023	5	0	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 0

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Acres of Paving: 4.86

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	0	8.00	81	0.73
Demolition	Excavators	0	8.00	158	0.38
Demolition	Rubber Tired Dozers	0	8.00	247	0.40

Trips and VMT

Phase Name	Offroad Equipment	Worker Trip	Vendor Trip	Hauling Trip	Worker Trip	Vendor Trip	Hauling Trip	Worker Vehicle	Vendor	Hauling
	Count	Number	Number	Number	Length	Length	Length	Class	Vehicle Class	Vehicle Class
Demolition	0	0.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

3.2 **Demolition - 2023**

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2023
<u>Unmitigated Construction Off-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 **Demolition - 2023**

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Mitigated	1.6086	3.4016	17.8571	0.0491	4.3957	0.0454	4.4411	1.1741	0.0429	1.2169		5,076.434 0	5,076.434 0	0.1896	0.3237	5,177.647 0
Unmitigated	1.6086	3.4016	17.8571	0.0491	4.3957	0.0454	4.4411	1.1741	0.0429	1.2169		5,076.434 0	5,076.434 0	0.1896	0.3237	5,177.647 0

4.2 Trip Summary Information

	Avei	age Daily Trip Ra	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	0.00		
General Heavy Industry	414.00	35.02	14.01	1,340,527	1,340,527
Other Asphalt Surfaces	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
User Defined Industrial	24.00	2.03	0.82	171,476	171,476
Total	438.01	37.05	14.82	1,512,002	1,512,002

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
City Park	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
General Heavy Industry	16.60	8.40	6.90	59.00	28.00	13.00	92	5	3
Other Asphalt Surfaces	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
User Defined Industrial	26.84	8.40	6.90	100.00	0.00	0.00	100	0	0

4.4 Fleet Mix

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	МН
City Park	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
General Heavy Industry	0.576000	0.060300	0.185900	0.151900	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.025900	0.000000	0.000000
Other Asphalt Surfaces	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
User Defined Industrial	0.000000	0.000000	0.000000	0.000000	0.130800	0.035900	0.250000	0.583300	0.000000	0.000000	0.000000	0.000000	0.000000

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
NaturalGas Mitigated	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
NaturalGas Unmitigated	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
General Heavy Industry	7942.29	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592	 	0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
General Heavy Industry	7.94229	0.0857	0.7787	0.6541	4.6700e- 003	 	0.0592	0.0592	 	0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000	 	0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391

6.0 Area Detail

6.1 Mitigation Measures Area

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Mitigated	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Unmitigated	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004	i i	1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	SubCategory Ib/day										lb/d	day				
Architectural Coating	0.2439					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Products	1.8522					0.0000	0.0000	 	0.0000	0.0000			0.0000			0.0000
,	4.6000e- 003	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004	 	1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Total	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating						0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.8522				 	0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	4.6000e- 003	4.5000e- 004	0.0497	0.0000	 	1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Total	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135

7.0 Water Detail

7.1 Mitigation Measures Water

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
Tractors/Loaders/Backhoes	2	4.00	365	200	0.37	CNG

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 16 Date: 3/11/2022 9:26 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

UnMitigated/Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Equipment Type	ent Type Ib/day									lb/d	day					
Tractors/Loaders/ Backhoes		2.0721	1.4984	6.3300e- 003		0.0752	0.0752		0.0692	0.0692	0.0000	613.0902	613.0902	0.1983	i i	618.0473
Total	0.2207	2.0721	1.4984	6.3300e- 003		0.0752	0.0752		0.0692	0.0692	0.0000	613.0902	613.0902	0.1983		618.0473

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type Nu	ımber
-------------------	-------

11.0 Vegetation

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Cottonwood & Edgemont (General Light Industrial Operations)

Riverside-South Coast County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Heavy Industry	89.67	1000sqft	2.06	89,667.00	0
User Defined Industrial	89.67	User Defined Unit	0.00	0.00	0
Other Asphalt Surfaces	176.40	1000sqft	4.05	176,404.00	0
Parking Lot	130.00	Space	0.81	35,264.00	0
City Park	0.79	Acre	0.79	34,588.00	0

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N20 Intensity
 0.004

 (Ib/MWhr)
 (Ib/MWhr)
 (Ib/MWhr)
 (Ib/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project area (without High-Cube Cold Storage use) is 7.71 acres

Construction Phase - Operations run only

Off-road Equipment - Operations run only

Vehicle Trips - Trip characteristics based on information provided in the Traffic analysis

Operational Off-Road Equipment - Based on SCAQMD High Cube Warehouse Truck Trip Study White Paper Summary of Busniess Survey Results (2014)

Fleet Mix - Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic analysis

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Table Name	Column Name	Default Value	New Value
tblConstructionPhase	NumDays	20.00	0.00
tblFleetMix	HHD	0.02	0.00
tblFleetMix	HHD	0.02	0.58
tblFleetMix	LDA	0.53	0.58
tblFleetMix	LDA	0.53	0.00
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT1	0.06	0.00
tblFleetMix	LDT2	0.17	0.19
tblFleetMix	LDT2	0.17	0.00
tblFleetMix	LHD1	0.03	0.00
tblFleetMix	LHD1	0.03	0.13
tblFleetMix	LHD2	7.3100e-003	0.00
tblFleetMix	LHD2	7.3100e-003	0.04
tblFleetMix	MCY	0.02	0.03
tblFleetMix	MCY	0.02	0.00
tblFleetMix	MDV	0.14	0.15
tblFleetMix	MDV	0.14	0.00
tblFleetMix	MH	5.4680e-003	0.00
tblFleetMix	MH	5.4680e-003	0.00
tblFleetMix	MHD	0.01	0.00
tblFleetMix	MHD	0.01	0.25
tblFleetMix	OBUS	6.1600e-004	0.00
tblFleetMix	OBUS	6.1600e-004	0.00
tblFleetMix	SBUS	1.1000e-003	0.00
tblFleetMix	SBUS	1.1000e-003	0.00
tblFleetMix	UBUS	3.1500e-004	0.00
tblFleetMix	UBUS	3.1500e-004	0.00
tblLandUse	LandUseSquareFeet	52,000.00	35,264.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblLandUse	LandUseSquareFeet	34,412.40	34,588.00
tblLandUse	LotAcreage	1.17	0.81
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOperationalOffRoadEquipment	OperDaysPerYear	260.00	365.00
tblOperationalOffRoadEquipment	OperFuelType	Diesel	CNG
tblOperationalOffRoadEquipment	OperHorsePower	97.00	200.00
tblOperationalOffRoadEquipment	OperHoursPerDay	8.00	4.00
tblOperationalOffRoadEquipment	OperOffRoadEquipmentNumber	0.00	2.00
tblVehicleTrips	CC_TTP	48.00	0.00
tblVehicleTrips	CNW_TTP	19.00	0.00
tblVehicleTrips	CW_TL	16.60	26.84
tblVehicleTrips	CW_TTP	33.00	0.00
tblVehicleTrips	CW_TTP	0.00	100.00
tblVehicleTrips	DV_TP	28.00	0.00
tblVehicleTrips	PB_TP	6.00	0.00
tblVehicleTrips	PR_TP	66.00	0.00
tblVehicleTrips	PR_TP	0.00	100.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	ST_TR	6.42	0.39
tblVehicleTrips	ST_TR	0.00	0.02
tblVehicleTrips	SU_TR	2.19	0.00
tblVehicleTrips	SU_TR	5.09	0.16
tblVehicleTrips	SU_TR	0.00	9.1000e-003
tblVehicleTrips	WD_TR	0.78	0.00
tblVehicleTrips	WD_TR	3.93	4.62
tblVehicleTrips	WD_TR	0.00	0.27
-			•

CalEEMod Version: CalEEMod.2020.4.0 Page 4 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.0 Emissions Summary

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/d	day		
2023	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/c	lay		
	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Area	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Energy	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
Mobile	1.3977	3.6024	15.5820	0.0460	4.3957	0.0455	4.4411	1.1741	0.0429	1.2170		4,765.243 6	4,765.243 6	0.1920	0.3276	4,867.673 9
Offroad	0.2207	2.0721	1.4984	6.3300e- 003		0.0752	0.0752		0.0692	0.0692	0.0000	613.0902	613.0902	0.1983		618.0473
Total	3.8047	6.4536	17.7841	0.0570	4.3957	0.1800	4.5757	1.1741	0.1714	1.3455	0.0000	6,312.826 8	6,312.826 8	0.4085	0.3448	6,425.773 8

CalEEMod Version: CalEEMod.2020.4.0 Page 6 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Area	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Energy	0.0857	0.7787	0.6541	4.6700e- 003	 	0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
Mobile	1.3977	3.6024	15.5820	0.0460	4.3957	0.0455	4.4411	1.1741	0.0429	1.2170		4,765.243 6	4,765.243 6	0.1920	0.3276	4,867.673 9
Offroad	0.2207	2.0721	1.4984	6.3300e- 003		0.0752	0.0752		0.0692	0.0692	0.0000	613.0902	613.0902	0.1983		618.0473
Total	3.8047	6.4536	17.7841	0.0570	4.3957	0.1800	4.5757	1.1741	0.1714	1.3455	0.0000	6,312.826 8	6,312.826 8	0.4085	0.3448	6,425.773 8

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

	nase ımber	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1		Demolition	Demolition	2/1/2023	1/31/2023	5	0	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 0

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Acres of Paving: 4.86

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	0	8.00	81	0.73
Demolition	Excavators	0	8.00	158	0.38
Demolition	Rubber Tired Dozers	0	8.00	247	0.40

Trips and VMT

Phase Name	Offroad Equipment	Worker Trip	Vendor Trip	Hauling Trip	Worker Trip	Vendor Trip	Hauling Trip	Worker Vehicle	Vendor	Hauling
	Count	Number	Number	Number	Length	Length	Length	Class	Vehicle Class	Vehicle Class
Demolition	0	0.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

3.2 **Demolition - 2023**

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2023
<u>Unmitigated Construction Off-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Oii rioda	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 **Demolition - 2023**

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Mitigated	1.3977	3.6024	15.5820	0.0460	4.3957	0.0455	4.4411	1.1741	0.0429	1.2170		4,765.243 6	4,765.243 6	0.1920	0.3276	4,867.673 9
Unmitigated	1.3977	3.6024	15.5820	0.0460	4.3957	0.0455	4.4411	1.1741	0.0429	1.2170		4,765.243 6	4,765.243 6	0.1920	0.3276	4,867.673 9

4.2 Trip Summary Information

	Avei	age Daily Trip Ra	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	0.00		
General Heavy Industry	414.00	35.02	14.01	1,340,527	1,340,527
Other Asphalt Surfaces	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
User Defined Industrial	24.00	2.03	0.82	171,476	171,476
Total	438.01	37.05	14.82	1,512,002	1,512,002

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
City Park	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
General Heavy Industry	16.60	8.40	6.90	59.00	28.00	13.00	92	5	3
Other Asphalt Surfaces	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
User Defined Industrial	26.84	8.40	6.90	100.00	0.00	0.00	100	0	0

4.4 Fleet Mix

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
City Park	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
General Heavy Industry	0.576000	0.060300	0.185900	0.151900	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.025900	0.000000	0.000000
Other Asphalt Surfaces	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
User Defined Industrial	0.000000	0.000000	0.000000	0.000000	0.130800	0.035900	0.250000	0.583300	0.000000	0.000000	0.000000	0.000000	0.000000

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
NaturalGas Mitigated	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
NaturalGas Unmitigated	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
General Heavy Industry	7942.29	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592	 	0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
General Heavy Industry	7.94229	0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592	 	0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0857	0.7787	0.6541	4.6700e- 003		0.0592	0.0592		0.0592	0.0592		934.3865	934.3865	0.0179	0.0171	939.9391

6.0 Area Detail

6.1 Mitigation Measures Area

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Mitigated	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Unmitigated	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004	i i	1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating	0.2439					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.8522					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	4.6000e- 003	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Total	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Coating	0.2439					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Products	1.8522					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
' · ·	4.6000e- 003	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135
Total	2.1006	4.5000e- 004	0.0497	0.0000		1.8000e- 004	1.8000e- 004		1.8000e- 004	1.8000e- 004		0.1065	0.1065	2.8000e- 004		0.1135

7.0 Water Detail

7.1 Mitigation Measures Water

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
Tractors/Loaders/Backhoes	2	4.00	365	200	0.37	CNG

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 16 Date: 3/11/2022 9:25 AM

Cottonwood & Edgemont (General Light Industrial Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

UnMitigated/Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Equipment Type					lb/e	day							lb/d	day		
Tractors/Loaders/ Backhoes		2.0721	1.4984	6.3300e- 003		0.0752	0.0752		0.0692	0.0692	0.0000	613.0902	613.0902	0.1983	i i	618.0473
Total	0.2207	2.0721	1.4984	6.3300e- 003		0.0752	0.0752		0.0692	0.0692	0.0000	613.0902	613.0902	0.1983		618.0473

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

This page intentionally left blank



EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Cottonwood & Edgemont (High-Cube Cold Storage Operations)

Riverside-South Coast County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Refrigerated Warehouse-No Rail	9.96	1000sqft	0.23	9,963.00	0
User Defined Industrial	9.96	User Defined Unit	0.00	0.00	0

1.2 Other Project Characteristics

UrbanizationUrbanWind Speed (m/s)2.4Precipitation Freq (Days)28Climate Zone10Operational Year2023

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N20 Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use -

Construction Phase - Operations run only

Off-road Equipment - Operations run only

Vehicle Trips - Trip characteristics based on information provided in the Traffic analysis

Fleet Mix - Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic analysis

Table Name	Column Name	Default Value	New Value
tblConstructionPhase	NumDays	10.00	0.00
tblFleetMix	HHD	0.02	0.00
tblFleetMix	HHD	0.02	0.40

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblFleetMix	LDA	0.53	0.58
tblFleetMix	LDA	0.53	0.00
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT1	0.06	0.00
tblFleetMix	LDT2	0.17	0.19
tblFleetMix	LDT2	0.17	0.00
tblFleetMix	LHD1	0.03	0.00
tblFleetMix	LHD1	0.03	0.31
tblFleetMix	LHD2	7.3100e-003	0.00
tblFleetMix	LHD2	7.3100e-003	0.09
tblFleetMix	MCY	0.02	0.03
tblFleetMix	MCY	0.02	0.00
tblFleetMix	MDV	0.14	0.15
tblFleetMix	MDV	0.14	0.00
tblFleetMix	MH	5.4680e-003	0.00
tblFleetMix	MH	5.4680e-003	0.00
tblFleetMix	MHD	0.01	0.00
tblFleetMix	MHD	0.01	0.20
tblFleetMix	OBUS	6.1600e-004	0.00
tblFleetMix	OBUS	6.1600e-004	0.00
tblFleetMix	SBUS	1.1000e-003	0.00
tblFleetMix	SBUS	1.1000e-003	0.00
tblFleetMix	UBUS	3.1500e-004	0.00
tblFleetMix	UBUS	3.1500e-004	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblVehicleTrips	CW_TL	16.60	26.84
tblVehicleTrips	CW_TTP	0.00	100.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	PR_TP	0.00	100.00
tblVehicleTrips	ST_TR	2.12	0.12
tblVehicleTrips	ST_TR	0.00	0.08
tblVehicleTrips	SU_TR	2.12	0.05
tblVehicleTrips	SU_TR	0.00	0.03
tblVehicleTrips	WD_TR	2.12	1.41
tblVehicleTrips	WD_TR	0.00	1.00

2.0 Emissions Summary

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/d	lay		
2023	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/d	day		
2023	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

CalEEMod Version: CalEEMod.2020.4.0 Page 5 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Area	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Energy	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
Mobile	0.0788	0.9524	0.8560	6.5200e- 003	0.3633	0.0106	0.3739	0.1005	0.0101	0.1107		683.6168	683.6168	0.0114	0.0780	707.1356
Total	0.3168	1.0909	0.9743	7.3500e- 003	0.3633	0.0211	0.3844	0.1005	0.0207	0.1212		849.7408	849.7408	0.0146	0.0810	874.2470

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Area	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Lilorgy	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
Mobile	0.0788	0.9524	0.8560	6.5200e- 003	0.3633	0.0106	0.3739	0.1005	0.0101	0.1107		683.6168	683.6168	0.0114	0.0780	707.1356
Total	0.3168	1.0909	0.9743	7.3500e- 003	0.3633	0.0211	0.3844	0.1005	0.0207	0.1212		849.7408	849.7408	0.0146	0.0810	874.2470

CalEEMod Version: CalEEMod.2020.4.0 Page 6 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	2/1/2023	1/31/2023	5	0	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 0

Acres of Paving: 0

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	0	8.00	81	0.73
Demolition	Rubber Tired Dozers	0	1.00	247	0.40
Demolition	Tractors/Loaders/Backhoes	0	6.00	97	0.37

Trips and VMT

Phase Name	Offroad Equipment	Worker Trip	Vendor Trip	Hauling Trip	Worker Trip	Vendor Trip	Hauling Trip	Worker Vehicle	Vendor	Hauling
	Count	Number	Number	Number	Length	Length	Length	Class	Vehicle Class	Vehicle Class
Demolition	0	0.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

CalEEMod Version: CalEEMod.2020.4.0 Page 7 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 **Demolition - 2023**

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 **Demolition - 2023**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Mitigated	0.0788	0.9524	0.8560	6.5200e- 003	0.3633	0.0106	0.3739	0.1005	0.0101	0.1107		683.6168	683.6168	0.0114	0.0780	707.1356
Unmitigated	0.0788	0.9524	0.8560	6.5200e- 003	0.3633	0.0106	0.3739	0.1005	0.0101	0.1107		683.6168	683.6168	0.0114	0.0780	707.1356

4.2 Trip Summary Information

	Avei	rage Daily Trip Ra	ite	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Refrigerated Warehouse-No Rail	14.00	1.18	0.47	43,873	43,873
User Defined Industrial	10.00	0.85	0.34	71,436	71,436
Total	24.00	2.03	0.81	115,309	115,309

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Refrigerated Warehouse-No	16.60	8.40	6.90	59.00	0.00	41.00	92	5	3
User Defined Industrial	26.84	8.40	6.90	100.00	0.00	0.00	100	0	0

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Refrigerated Warehouse-No Rail	0.576000	0.060300	0.185900	0.151900	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.025900	0.000000	0.000000

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

0.000000 0.000000 0.000000 0.000000 0.000000	User Defined Industrial	0.000000	0.000000	0.000000	0.000000	0.313800	0.086200	0.200000	0.400000	0.000000	0.000000	0.000000	0.000000	0.00000
--	-------------------------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	---------

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
NaturalGas Mitigated	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	day		
Refrigerated Warehouse-No Rail	1412.02	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067

<u>Mitigated</u>

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	day		
Refrigerated Warehouse-No Rail	1.41202	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067

6.0 Area Detail

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.1 Mitigation Measures Area

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Mitigated	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Unmitigated	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003

6.2 Area by SubCategory

<u>Unmitigated</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating	0.0253					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	0.1973					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	1.9000e- 004	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Total	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
SubCategory	lb/day										lb/day						
Architectural Coating	0.0200					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000	
	0.1973					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000	
Landscaping	1.9000e- 004	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005	 	1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003	
Total	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003	

7.0 Water Detail

7.1 Mitigation Measures Water

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type Number Hours/Day Hours/Year Horse Power Load Factor Fuel Type	Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
--	----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Cottonwood & Edgemont (High-Cube Cold Storage Operations)

Riverside-South Coast County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Refrigerated Warehouse-No Rail	9.96	1000sqft	0.23	9,963.00	0
User Defined Industrial	9.96	User Defined Unit	0.00	0.00	0

1.2 Other Project Characteristics

UrbanizationUrbanWind Speed (m/s)2.4Precipitation Freq (Days)28Climate Zone10Operational Year2023

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N20 Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use -

Construction Phase - Operations run only

Off-road Equipment - Operations run only

Vehicle Trips - Trip characteristics based on information provided in the Traffic analysis

Fleet Mix - Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic analysis

Table Name	Column Name	Default Value	New Value
tblConstructionPhase	NumDays	10.00	0.00
tblFleetMix	HHD	0.02	0.00
tblFleetMix	HHD	0.02	0.40

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblFleetMix tblFleetMix	LDA LDA	0.53	0.58		
	LDA	0.50			
		0.53	0.00		
tblFleetMix	LDT1	0.06	0.06		
tblFleetMix	LDT1	0.06	0.00		
tblFleetMix	LDT2	0.17	0.19		
tblFleetMix	LDT2	0.17	0.00		
tblFleetMix	LHD1	0.03	0.00		
tblFleetMix	LHD1	0.03	0.31		
tblFleetMix	LHD2	7.3100e-003	0.00		
tblFleetMix	LHD2	7.3100e-003	0.09		
tblFleetMix	MCY	0.02	0.03		
tblFleetMix	MCY	0.02	0.00		
tblFleetMix	MDV	0.14	0.15		
tblFleetMix	MDV	0.14	0.00		
tblFleetMix	MH	5.4680e-003	0.00		
tblFleetMix	MH	5.4680e-003	0.00		
tblFleetMix	MHD	0.01	0.00		
tblFleetMix	MHD	0.01	0.20		
tblFleetMix	OBUS	6.1600e-004	0.00		
tblFleetMix	OBUS	6.1600e-004	0.00		
tblFleetMix	SBUS	1.1000e-003	0.00		
tblFleetMix	SBUS	1.1000e-003	0.00		
tblFleetMix	UBUS	3.1500e-004	0.00		
tblFleetMix	UBUS	3.1500e-004	0.00		
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00		
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00		
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00		
tblVehicleTrips	CW_TL	16.60	26.84		
tblVehicleTrips	CW_TTP	0.00	100.00		

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	PR_TP	0.00	100.00
tblVehicleTrips	ST_TR	2.12	0.12
tblVehicleTrips	ST_TR	0.00	0.08
tblVehicleTrips	SU_TR	2.12	0.05
tblVehicleTrips	SU_TR	0.00	0.03
tblVehicleTrips	WD_TR	2.12	1.41
tblVehicleTrips	WD_TR	0.00	1.00

2.0 Emissions Summary

CalEEMod Version: CalEEMod.2020.4.0 Page 4 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day									lb/day						
2023	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day									lb/day						
2023	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

CalEEMod Version: CalEEMod.2020.4.0 Page 5 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Area	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Energy	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
Mobile	0.0710	1.0044	0.7828	6.4200e- 003	0.3633	0.0106	0.3739	0.1005	0.0101	0.1107		673.7553	673.7553	0.0115	0.0783	697.3649
Total	0.3090	1.1429	0.9011	7.2500e- 003	0.3633	0.0212	0.3844	0.1005	0.0207	0.1212		839.8792	839.8792	0.0146	0.0813	864.4763

Mitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Area	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Energy	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
Mobile	0.0710	1.0044	0.7828	6.4200e- 003	0.3633	0.0106	0.3739	0.1005	0.0101	0.1107		673.7553	673.7553	0.0115	0.0783	697.3649
Total	0.3090	1.1429	0.9011	7.2500e- 003	0.3633	0.0212	0.3844	0.1005	0.0207	0.1212		839.8792	839.8792	0.0146	0.0813	864.4763

CalEEMod Version: CalEEMod.2020.4.0 Page 6 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	2/1/2023	1/31/2023	5	0	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 0

Acres of Paving: 0

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	0	8.00	81	0.73
Demolition	Rubber Tired Dozers	0	1.00	247	0.40
Demolition	Tractors/Loaders/Backhoes	0	6.00	97	0.37

Trips and VMT

Phase Name	Offroad Equipment	Worker Trip	Vendor Trip	Hauling Trip	Worker Trip	Vendor Trip	Hauling Trip	Worker Vehicle	Vendor	Hauling
	Count	Number	Number	Number	Length	Length	Length	Class	Vehicle Class	Vehicle Class
Demolition	0	0.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

CalEEMod Version: CalEEMod.2020.4.0 Page 7 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2023
<u>Unmitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Off-Road	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 **Demolition - 2023**

Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.1 Mitigation Measures Mobile

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Mitigated	0.0710	1.0044	0.7828	6.4200e- 003	0.3633	0.0106	0.3739	0.1005	0.0101	0.1107		673.7553	673.7553	0.0115	0.0783	697.3649
Unmitigated	0.0710	1.0044	0.7828	6.4200e- 003	0.3633	0.0106	0.3739	0.1005	0.0101	0.1107		673.7553	673.7553	0.0115	0.0783	697.3649

4.2 Trip Summary Information

	Avei	rage Daily Trip Ra	ite	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Refrigerated Warehouse-No Rail	14.00	1.18	0.47	43,873	43,873
User Defined Industrial	10.00	0.85	0.34	71,436	71,436
Total	24.00	2.03	0.81	115,309	115,309

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Refrigerated Warehouse-No	16.60	8.40	6.90	59.00	0.00	41.00	92	5	3
User Defined Industrial	26.84	8.40	6.90	100.00	0.00	0.00	100	0	0

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Refrigerated Warehouse-No Rail	0.576000	0.060300	0.185900	0.151900	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.025900	0.000000	0.000000

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

0.000000 0.000000 0.000000 0.000000 0.000000	User Defined Industrial	0.000000	0.000000	0.000000	0.000000	0.313800	0.086200	0.200000	0.400000	0.000000	0.000000	0.000000	0.000000	0.00000
--	-------------------------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	---------

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
NaturalGas Mitigated	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105	i i	0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
NaturalGas Unmitigated	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105	 	0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	lay		
Refrigerated Warehouse-No Rail	1412.02	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067

Mitigated

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	lay		
Refrigerated Warehouse-No Rail	1.41202	0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0152	0.1384	0.1163	8.3000e- 004		0.0105	0.0105		0.0105	0.0105		166.1196	166.1196	3.1800e- 003	3.0500e- 003	167.1067

6.0 Area Detail

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.1 Mitigation Measures Area

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Mitigated	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Unmitigated	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating	0.0253					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	0.1973					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	1.9000e- 004	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Total	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	lay		
Architectural Coating	ı 0.0200 ıı ı					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
	0.1973					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	1.9000e- 004	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003
Total	0.2228	2.0000e- 005	2.0300e- 003	0.0000		1.0000e- 005	1.0000e- 005		1.0000e- 005	1.0000e- 005		4.3600e- 003	4.3600e- 003	1.0000e- 005		4.6500e- 003

7.0 Water Detail

7.1 Mitigation Measures Water

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 14 Date: 3/11/2022 9:32 AM

Cottonwood & Edgemont (High-Cube Cold Storage Operations) - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

-	_		aste		
u	•	1A	00+0	170+0	
_		v	4510	11014	

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type Number Hours/Day Hours/Year Horse Power Load Factor	Fuel Type
--	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

This page intentionally left blank



APPENDIX 3.4:

SCAQMD AMICUS BRIEF



IN THE SUPREME COURT OF C ALIFORNIA

SIERRA CLUB, REVIVE THE SAN JOAQUIN, and LEAGUE OF WOMEN VOTERS OF FRESNO,

Plaintiffs and Appellants,

v.

SUPREME COOK!

COUNTY OF FRESNO,

Defendant and Respondent,

and,

APR 1 3 2015

Frank A. McGure Clerk

Jeputy

FRIANT RANCH, L.P.,

Real Party in Interest and Respondent.

After a Published Decision by the Court of Appeal, filed May 27, 2014 Fifth Appellate District Case No. F066798

Appeal from the Superior Court of California, County of Fresno Case No. 11CECG00726 Honorable Rosendo A. Pena, Jr.

APPLICATION OF THE SOUTH COAST AIR QUALITY
MANAGEMENT DISTRICT FOR LEAVE TO FILE
BRIEF OF AMICUS CURIAE IN SUPPORT OF NEITHER PARTY
AND [PROPOSED] BRIEF OF AMICUS CURIAE

Kurt R. Wiese, General Counsel (SBN 127251)
*Barbara Baird, Chief Deputy Counsel (SBN 81507)
SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT
21865 Copley Drive, Diamond Bar, CA 91765
Telephone: 909-396-2302; Facsimile: 909-396-2961
Email: bbaird@aqmd.gov

Counsel for [Proposed] Amicus Curiae,
SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT

BECEIVED

APR = 0 2015

CLERK SUPREME COURT

TABLE OF CONTENTS

APPL	ICATI	ON FOR LEAVE TO FILE amicus curiae brief	App-1
HOW	THIS	BRIEF WILL ASSIST THE COURT	. App-1
STAT	EMEN	TOF INTEREST OF AMICUS CURIAE	. App-3
CERT	TIFICA	TION REGARDING AUTHORSHIP & FUNDING	. App-4
BRIE	F OF A	MICUS CURIAE	1
SUM	MARY	OF ARGUMENT	1
ARGI	UMEN'	Τ	2
I.	RELE	VANT FACTUAL AND LEGAL FRAMEWORK	2
	A.	Air Quality Regulatory Background	2
	B.	The SCAQMD's Role Under CEQA	6
II.	RULE MUS	COURT SHOULD NOT SET A HARD-AND-FAST E CONCERNING THE EXTENT TO WHICH AN EIR I CORRELATE A PROJECT'S EMISSION OF UTANTS WITH RESULTING HEALTH IMPACTS	8
III.	SUFF REQU AND	QUESTION OF WHETHER AN EIR CONTAINS ICIENT ANALYSIS TO MEET CEQA'S JIREMENTS IS A MIXED QUESTION OF FACT LAW GOVERNED BY TWO DIFFERENT IDARDS OF REVIEW	16
	A.	Standard of Review for Feasibility Determination and	
	B.	Sufficiency as an Informative Document Friant Ranch's Rationale for Rejecting the Independent Judgment Standard of Review is Unsupported by Case Law	
IV.	REQU WITH	RTS MUST SCRUPULOUSLY ENFORCE THE JIREMENTS THAT LEAD AGENCIES CONSULT AND OBTAIN COMMENTS FROM AIR	
GOM.		RICTS	
CONC	CLUSIO	JN	20

TABLE OF AUTHORITIES

State Cases Association of Irritated Residents v. County of Madera (2003) Bakersfield Citizens for Local Control v. City of Bakersfield (2004) Berkeley Keep Jets Over the Bay v. Board of Port Commissioners (2007) 91 Cal.App.4th 1344......21, 28 Center for Biological Diversity v. County of San Bernardino (2010) Citizens of Goleta Valley v. Bd. of Supervisors (1990) County of Amador v. El Dorado County Water Agency (1999) 76 Cal.App.4th 93123 Crocker National Bank v. City and County of San Francisco (1989) Ebbetts Pass Forest Watch v. California Dept. of Forestry & Fire Protection (2008) 43 Cal.4th 936......21 Fall River Wild Trout Foundation v. County of Shasta, (1999) Gray v. County of Madera (2008) 167 Cal.App.4th 109925 Laurel Heights Improvement Assn. v. Regents of the Univ of Cal. ("Laurel Heights I") Natural Res. Def. Council v SCAOMD, Neighbors for Smart Rail v. Exposition Metro Line (2013)

State Cases (cont'd)

Orange County Air Pollution Control District v. Public Util. Com. (1971) 4 Cal.3d 9452'	7
Save Our Peninsula Comm. v. Monterey County Bd. of Supervisors (2001) 87 Cal.App.4th 9919	9
Schenck v. County of Sonoma (2011) 198 Cal.App.4th 949	7
Sierra Club v. County of Fresno (2014) 226 Cal.App.4th 704 (superseded by grant of review) 172 Cal.Rptr.3d 271	3
Sierra Club v. State Bd. Of Forestry (1994) 7 Cal.4th 121528	8
Uphold Our Heritage v. Town of Woodside (2007) 147 Cal.App.4th 58720	0
Vineyard Area Citizens for Responsible Growth, Inc. v. City of Rancho Cordova (2007) 40 Cal.4th 4121, 17, 19, 24, 25, 26	6
Western Oil & Gas Assn. v. Monterey Bay Unified APCD (1989) 49 Cal.3d 4085	
California Statutes	
Health & Saf. Code § 39666 5 Health & Saf. Code § 40000 3 Health & Saf. Code § 40001 3 Health & Saf. Code § 40410 3 Health & Saf. Code § 40460, et seq 4	
Health & Saf. Code § 41508 5 Health & Saf. Code § 42300, et seq 5 Health & Saf. Code § 44320 5 Health & Saf. Code § 44322 5 Health & Saf. Code § 44360 5	
Pub. Resources Code § 20180.3 27 Pub. Resources Code § 21061 19 Pub. Resources Code § 21061.1 16	

California Statutes (cont'd) California Regulations Cal. Code Regs., tit. 14, §§ 15000, et seq. ("CEQA Guidelines") CEQA Guidelines § 15050......6 CEQA Guidelines § 15381......6 **Federal Statutes**

Rules Other Association of Environmental Professionals, 2015 CEQA Statute and Guidelines (2015) (Appendix G, "Environmental Checklist CARB, Health Impacts Analysis: PM Premature Death Relationship......14 CARB, Health Impacts Analysis: CARB, Resolution 98-35, Aug. 27, 19988 SCAQMD, Final Subsequent Mitigated Negative Declaration for: Warren E&P, Inc. WTU Central Facility, New Equipment Project (certified July 19, 2011) 14-15 SCAQMD Governing Board Agenda, February 4, 2011, Agenda Item 26, Assessment for: Re-adoption of Proposed Rule 1315 – Federal New Source Review Tracking System, 12 SCAQMD Governing Board Agenda, April 3, 2015, SCAQMD, Supplemental Guidelines for Preparing Risk Assessments for the Air Toxics "Hot Spots" Information and U.S. EPA, Guideline on Ozone Monitoring Site Selection (Aug. 1998) EPA-454/R-98-002 § 5.1.211 U.S. EPA, Health Effects of Ozone in the General Population, Figure 9,11

U.S. EPA, National Ambient Air Quality Standards (NAAQS).......4

U.S. EPA, Particulate Matter (PM)......4

TO THE HONORABLE CHIEF JUSTICE AND JUSTICES OF THE SUPREME COURT:

APPLICATION FOR LEAVE TO FILE AMICUS CURIAE BRIEF

Pursuant to Rule 8.520(f) of the California Rules of Court, the South Coast Air Quality Management District (SCAQMD) respectfully requests leave to file the attached *amicus curiae* brief. Because SCAQMD's position differs from that of either party, we request leave to submit this amicus brief in support of neither party.

HOW THIS BRIEF WILL ASSIST THE COURT

SCAQMD's proposed amicus brief takes a position on two of the issues in this case. In both instances, its position differs from that of either party. The issues are:

- 1) Does the California Environmental Quality Act (CEQA) require an environmental impact report (EIR) to correlate a project's air pollution emissions with specific levels of health impacts?
- 2) What is the proper standard of review for determining whether an EIR provides sufficient information on the health impacts caused by a project's emission of air pollutants?

This brief will assist the Court by discussing the practical realities of correlating identified air quality impacts with specific health outcomes. In short, CEQA requires agencies to provide detailed information about a project's air quality impacts that is sufficient for the public and decisionmakers to adequately evaluate the project and meaningfully understand its impacts. However, the level of analysis is governed by a rule of reason; CEQA only requires agencies to conduct analysis if it is reasonably feasible to do so.

With regard to health-related air quality impacts, an analysis that correlates a project's air pollution emissions with specific levels of health impacts will be feasible in some cases but not others. Whether it is feasible depends on a variety of factors, including the nature of the project and the nature of the analysis under consideration. The feasibility of analysis may also change over time as air districts and others develop new tools for measuring projects' air quality related health impacts. Because SCAQMD has among the most sophisticated air quality modeling and health impact evaluation capability of any of the air districts in the State, it is uniquely situated to express an opinion on the extent to which the Court should hold that CEQA requires lead agencies to correlate air quality impacts with specific health outcomes.

SCAQMD can also offer a unique perspective on the question of the appropriate standard of review. SCAQMD submits that the proper standard of review for determining whether an EIR is sufficient as an informational document is more nuanced than argued by either party. In our view, this is a mixed question of fact and law. It includes determining whether additional analysis is feasible, which is primarily a factual question that should be reviewed under the substantial evidence standard. However, it also involves determining whether the omission of a particular analysis renders an EIR insufficient to serve CEQA's purpose as a meaningful, informational document. If a lead agency has not determined that a requested analysis is infeasible, it is the court's role to determine whether the EIR nevertheless meets CEQA's purposes, and courts should not defer to the lead agency's conclusions regarding the legal sufficiency of an EIR's analysis. The ultimate question of whether an EIR's analysis is "sufficient" to serve CEQA's informational purposes is predominately a question of law that courts should review de novo.

This brief will explain the rationale for these arguments and may assist the Court in reaching a conclusion that accords proper respect to a lead agency's factual conclusions while maintaining judicial authority over the ultimate question of what level of analysis CEQA requires.

STATEMENT OF INTEREST OF AMICUS CURIAE

The SCAQMD is the regional agency primarily responsible for air pollution control in the South Coast Air Basin, which consists of all of Orange County and the non-desert portions of the Los Angeles, Riverside, and San Bernardino Counties. (Health & Saf. Code § 40410; Cal. Code Regs., tit. 17, § 60104.) The SCAQMD participates in the CEQA process in several ways. Sometimes it acts as a lead agency that prepares CEQA documents for projects. Other times it acts as a responsible agency when it has permit authority over some part of a project that is undergoing CEQA review by a different lead agency. Finally, SCAQMD also acts as a commenting agency for CEQA documents that it receives because it is a public agency with jurisdiction by law over natural resources affected by the project.

In all of these capacities, SCAQMD will be affected by the decision in this case. SCAQMD sometimes submits comments requesting that a lead agency perform an additional type of air quality or health impacts analysis. On the other hand, SCAQMD sometimes determines that a particular type of health impact analysis is not feasible or would not produce reliable and informative results. Thus, SCAQMD will be affected by the Court's resolution of the extent to which CEQA requires EIRs to correlate emissions and health impacts, and its resolution of the proper standard of review.

CERTIFICATION REGARDING AUTHORSHIP AND FUNDING

No party or counsel in the pending case authored the proposed amicus curiae brief in whole or in part, or made any monetary contribution intended to fund the preparation or submission of the brief. No person or entity other than the proposed *Amicus Curiae* made any monetary contribution intended to fund the preparation or submission of the brief.

Respectfully submitted,

DATED: April 3, 2015

SOUTH COAST AIR QUALITY
MANAGEMENT DISTRICT
KURT R. WIESE, GENERAL COUNSEL
BARBARA BAIRD, CHIEF DEPUTY COUNSEL

Barbara Baird

Attorneys for [proposed] Amicus Curiae SOUTH COAST AIR QUALITY MANAGEMENT DISTICT

BRIEF OF AMICUS CURIAE

SUMMARY OF ARGUMENT

The South Coast Air Quality Management District (SCAOMD) submits that this Court should not try to establish a hard-and-fast rule concerning whether lead agencies are required to correlate emissions of air pollutants with specific health consequences in their environmental impact reports (EIR). The level of detail required in EIRs is governed by a few. core CEQA (California Environmental Quality Act) principles. As this Court has stated, "[a]n EIR must include detail sufficient to enable those who did not participate in its preparation to understand and to consider meaningfully the issues raised by the proposed project." (Laurel Heights Improvement Assn. v. Regents of the Univ of Cal. (1988) 47 Cal.3d 376, 405 ["Laurel Heights 1"]) Accordingly, "an agency must use its best efforts to find out and disclose all that it reasonably can." (Vineyard Area Citizens for Responsible Growth, Inc. v. City of Rancho Cordova (2007) 40 Cal.4th 412, 428 (quoting CEOA Guidelines § 15144)¹.). However, "[a]nalysis of environmental effects need not be exhaustive, but will be judged in light of what is reasonably feasible." (Association of Irritated Residents v. County of Madera (2003) 107 Cal. App. 4th 1383, 1390; CEQA Guidelines §§ 15151, 15204(a).)

With regard to analysis of air quality related health impacts, EIRs must generally quantify a project's pollutant emissions, but in some cases it is not feasible to correlate these emissions to specific, quantifiable health impacts (e.g., premature mortality; hospital admissions). In such cases, a general description of the adverse health impacts resulting from the pollutants at issue may be sufficient. In other cases, due to the magnitude

¹ The CEQA Guidelines are found at Cal. Code Regs., tit. 14 §§ 15000, et seq.

or nature of the pollution emissions, as well as the specificity of the project involved, it may be feasible to quantify health impacts. Or there may be a less exacting, but still meaningful analysis of health impacts that can feasibly be performed. In these instances, agencies should disclose those impacts.

SCAQMD also submits that whether or not an EIR complies with CEQA's informational mandates by providing sufficient, feasible analysis is a mixed question of fact and law. Pertinent here, the question of whether an EIR's discussion of health impacts from air pollution is sufficient to allow the public to understand and consider meaningfully the issues involves two inquiries: (1) Is it feasible to provide the information or analysis that a commenter is requesting or a petitioner is arguing should be required?; and (2) Even if it is feasible, is the agency relying on other policy or legal considerations to justify not preparing the requested analysis? The first question of whether an analysis is feasible is primarily a question of fact that should be judged by the substantial evidence standard. The second inquiry involves evaluating CEQA's information disclosure purposes against the asserted reasons to not perform the requested analysis. For example, an agency might believe that its EIR meets CEQA's informational disclosure standards even without a particular analysis, and therefore choose not to conduct that analysis. SCAQMD submits that this is more of a legal question, which should be reviewed de novo as a question of law.

ARGUMENT

I. RELEVANT FACTUAL AND LEGAL FRAMEWORK.

A. Air Quality Regulatory Background

The South Coast Air Quality Management District (SCAQMD) is one of the local and regional air pollution control districts and air quality management districts in California. The SCAQMD is the regional air pollution agency for the South Coast Air Basin, which consists of all of Orange County and the non-desert portions of Los Angeles, Riverside, and San Bernardino Counties. (Health & Saf. Code § 40410, 17 Cal. Code Reg. § 60104.) The SCAQMD also includes the Coachella Valley in Riverside County (Palm Springs area to the Salton Sea). (SCAQMD, *Final 2012 AQMP (Feb. 2013)*, http://www.aqmd.gov/home/library/clean-air-plans/air-quality-mgt-plan/final-2012-air-quality-management-plan; then follow "chapter 7" hyperlink; pp 7-1, 7-3 (last visited Apr. 1, 2015).) The SCAQMD's jurisdiction includes over 16 million residents and has the worst or nearly the worst air pollution levels in the country for ozone and fine particulate matter. (SCAQMD, *Final 2012 AQMP (Feb. 2013)*, http://www.aqmd.gov/home/library/clean-air-plans/air-quality-mgt-plan/final-2012-air-quality-management-plan; then follow "Executive Summary" hyperlink p. ES-1 (last visited Apr. 1, 2015).)

Under California law, the local and regional districts are primarily responsible for controlling air pollution from all sources except motor vehicles. (Health & Saf. Code § 40000.) The California Air Resources Board (CARB), part of the California Environmental Protection Agency, is primarily responsible for controlling pollution from motor vehicles. (*Id.*) The air districts must adopt rules to achieve and maintain the state and federal ambient air quality standards within their jurisdictions. (Health & Saf. Code § 40001.)

The federal Clean Air Act (CAA) requires the United States Environmental Protection Agency (EPA) to identify pollutants that are widely distributed and pose a threat to human health, developing a so-called "criteria" document. (42 U.S.C. § 7408; CAA § 108.) These pollutants are frequently called "criteria pollutants." EPA must then establish "national ambient air quality standards" at levels "requisite to protect public health",

allowing "an adequate margin of safety." (42 U.S.C. § 7409; CAA § 109.) EPA has set standards for six identified pollutants: ozone, nitrogen dioxide, sulfur dioxide, carbon monoxide, particulate matter (PM), and lead. (U.S. EPA, National Ambient Air Quality Standards (NAAQS), http://www.epa.gov/air/criteria.html (last updated Oct. 21, 2014).)²

Under the Clean Air Act, EPA sets emission standards for motor vehicles and "nonroad engines" (mobile farm and construction equipment, marine vessels, locomotives, aircraft, etc.). (42 U.S.C. §§ 7521, 7547; CAA §§ 202, 213.) California is the only state allowed to establish emission standards for motor vehicles and most nonroad sources; however, it may only do so with EPA's approval. (42 U.S.C. §§ 7543(b), 7543(e); CAA §§ 209(b), 209(c).) Sources such as manufacturing facilities, power plants and refineries that are not mobile are often referred to as "stationary sources." The Clean Air Act charges state and local agencies with the primary responsibility to attain the national ambient air quality standards. (42 U.S.C. § 7401(a)(3); CAA § 101(a)(3).) Each state must adopt and implement a plan including enforceable measures to achieve and maintain the national ambient air quality standards. (42 U.S.C. § 7410; CAA § 110.) The SCAQMD and CARB jointly prepare portion of the plan for the South Coast Air Basin and submit it for approval by EPA. (Health & Saf. Code §§ 40460, et seq.)

The Clean Air Act also requires state and local agencies to adopt a permit program requiring, among other things, that new or modified "major" stationary sources use technology to achieve the "lowest achievable emission rate," and to control minor stationary sources as

² Particulate matter (PM) is further divided into two categories: fine particulate or PM_{2.5} (particles with a diameter of less than or equal to 2.5 microns) and coarse particulate (PM₁₀) (particles with a diameter of 10 microns or less). (U.S. EPA, Particulate Matter (PM), http://www.epa.gov/airquality/particlepollution/ (last visited Apr. 1, 2015).)

needed to help attain the standards. (42 U.S.C. §§ 7502(c)(5), 7503(a)(2), 7410(a)(2)(C); CAA §§ 172(c)(5), 173(a)(2), 110(a)(2)(C).) The air districts implement these permit programs in California. (Health & Saf. Code §§ 42300, et seq.)

The Clean Air Act also sets out a regulatory structure for over 100 so-called "hazardous air pollutants" calling for EPA to establish "maximum achievable control technology" (MACT) for sources of these pollutants. (42 U.S.C. § 7412(d)(2); CAA § 112(d)(2).) California refers to these pollutants as "toxic air contaminants" (TACs) which are subject to two state-required programs. The first program requires "air toxics control measures" for specific categories of sources. (Health & Saf. Code § 39666.) The other program requires larger stationary sources and sources identified by air districts to prepare "health risk assessments" for impacts of toxic air contaminants. (Health & Saf. Code §§ 44320(b), 44322, 44360.) If the health risk exceeds levels identified by the district as "significant," the facility must implement a "risk reduction plan" to bring its risk levels below "significant" levels. Air districts may adopt additional more stringent requirements than those required by state law, including requirements for toxic air contaminants. (Health & Saf. Code § 41508; Western Oil & Gas Assn. v. Monterey Bay Unified APCD (1989) 49 Cal.3d 408, 414.) For example, SCAQMD has adopted a rule requiring new or modified sources to keep their risks below specified levels and use best available control technology (BACT) for toxics. (SCAQMD, Rule 1401-New Source Review of Toxic Air Contaminants, http://www.aqmd.gov/home/regulations/rules/scaqmd-rule-book/regulation-

B. The SCAQMD's Role Under CEQA

The California Environmental Quality Act (CEQA) requires public agencies to perform an environmental review and appropriate analysis for projects that they implement or approve. (Pub. Resources Code § 21080(a).) The agency with primary approval authority for a particular project is generally the "lead agency" that prepares the appropriate CEQA document. (CEQA Guidelines §§ 15050, 15051.) Other agencies having a subsequent approval authority over all or part of a project are called "responsible" agencies that must determine whether the CEQA document is adequate for their use. (CEQA Guidelines §§ 15096(c), 15381.) Lead agencies must also consult with and circulate their environmental impact reports to "trustee agencies" and agencies "with jurisdiction by law" including "authority over resources which may be affected by the project." (Pub. Resources Code §§ 21104(a), 21153; CEQA Guidelines §§ 15086(a)(3), 15073(c).) The SCAQMD has a role in all these aspects of CEQA.

Fulfilling its responsibilities to implement its air quality plan and adopt rules to attain the national ambient air quality standards, SCAQMD adopts a dozen or more rules each year to require pollution reductions from a wide variety of sources. The SCAQMD staff evaluates each rule for any adverse environmental impact and prepares the appropriate CEQA document. Although most rules reduce air emissions, they may have secondary environmental impacts such as use of water or energy or disposal of waste—e.g., spent catalyst from control equipment.³

³ The SCAQMD's CEQA program for its rules is a "Certified Regulatory Program" under which it prepares a "functionally equivalent" document in lieu of a negative declaration or EIR. (Pub. Resources Code § 21080.5, CEQA Guidelines § 15251(l).)

The SCAQMD also approves a large number of permits every year to construct new, modified, or replacement facilities that emit regulated air pollutants. The majority of these air pollutant sources have already been included in an earlier CEQA evaluation for a larger project, are currently being evaluated by a local government as lead agency, or qualify for an exemption. However, the SCAQMD sometimes acts as lead agency for major projects where the local government does not have a discretionary approval. In such cases, SCAQMD prepares and certifies a negative declaration or environmental impact report (EIR) as appropriate.⁴ SCAQMD evaluates perhaps a dozen such permit projects under CEQA each year. SCAQMD is often also a "responsible agency" for many projects since it must issue a permit for part of the projects (e.g., a boiler used to provide heat in a commercial building). For permit projects evaluated by another lead agency under CEQA, SCAQMD has the right to determine that the CEQA document is inadequate for its purposes as a responsible agency, but it may not do so because its permit program already requires all permitted sources to use the best available air pollution control technology. (SCAQMD, Rule 1303(a)(1) – Requirements, http://www.aqmd.gov/home/regulations/rules/scaqmd-rule-book/regulationxiii; then follow "Rule 1303" hyperlink (last visited Apr. 1, 2015).)

Finally, SCAQMD receives as many as 60 or more CEQA documents each month (around 500 per year) in its role as commenting agency or an agency with "jurisdiction by law" over air quality—a natural resource affected by the project. (Pub. Resources Code §§ 21104(a), 21153; CEQA Guidelines § 15366(a)(3).) The SCAQMD staff provides comments on as many as 25 or 30 such documents each month.

⁴ The SCAQMD's permit projects are not included in its Certified Regulatory Program, and are evaluated under the traditional local government CEQA analysis. (Pub. Resources Code §§ 21150-21154.)

(SCAQMD Governing Board Agenda, Apr. 3, 2015, Agenda Item 16, Attachment A, http://www.aqmd.gov/home/library/meeting-agendas-minutes/agenda?title=governing-board-meeting-agenda-april-3-2015; then follow "16. Lead Agency Projects and Environmental Documents Received by SCAQMD" hyperlink (last visited Apr. 1, 2015).) Of course, SCAQMD focuses its commenting efforts on the more significant projects.

Typically, SCAQMD comments on the adequacy of air quality analysis, appropriateness of assumptions and methodology, and completeness of the recommended air quality mitigation measures. Staff may comment on the need to prepare a health risk assessment detailing the projected cancer and noncancer risks from toxic air contaminants resulting from the project, particularly the impacts of diesel particulate matter, which CARB has identified as a toxic air contaminant based on its carcinogenic effects. (California Air Resources Board, Resolution 98-35, Aug. 27, 1998, http://www.arb.ca.gov/regact/diesltac/diesltac.htm; then follow Resolution 98-35 hyperlink (last visited Apr. 1, 2015).) Because SCAQMD already requires new or modified stationary sources of toxic air contaminants to use the best available control technology for toxics and to keep their risks below specified levels, (SCAQMD Rule 1401, supra, note 15), the greatest opportunity to further mitigate toxic impacts through the CEQA process is by reducing emissions—particularly diesel emissions—from vehicles.

II. THIS COURT SHOULD NOT SET A HARD-AND-FAST RULE CONCERNING THE EXTENT TO WHICH AN EIR MUST CORRELATE A PROJECT'S EMISSION OF POLLUTANTS WITH RESULTING HEALTH IMPACTS.

Numerous cases hold that courts do not review the correctness of an EIR's conclusions but rather its sufficiency as an informative document. (Laurel Heights 1, supra, 47 Cal.3d at p. 392; Citizens of Goleta Valley v.

Bd. of Supervisors (1990) 52 Cal.3d 553, 569; Bakersfield Citizens for Local Control v. City of Bakersfield (2004) 124 Cal.App.4th 1184, 1197.)

As stated by the Court of Appeal in this case, where an EIR has addressed a topic, but the petitioner claims that the information provided about that topic is insufficient, courts must "draw[] a line that divides *sufficient* discussions from those that are *insufficient*." (*Sierra Club v. County of Fresno* (2014) 226 Cal.App.4th 704 (superseded by grant of review) 172 Cal.Rptr.3d 271, 290.) The Court of Appeal readily admitted that "[t]he terms themselves – sufficient and insufficient – provide little, if any, guidance as to where the line should be drawn. They are simply labels applied once the court has completed its analysis." (*Id.*)

The CEQA Guidelines, however, provide guidance regarding what constitutes a sufficient discussion of impacts. Section 15151 states that "the sufficiency of an EIR is to be reviewed in light of what is reasonably feasible." Case law reflects this: "Analysis of environmental effects need not be exhaustive, but will be judged in light of what was reasonably feasible." (Association of Irritated Residents v. County of Madera, supra, 107 Cal.App.4th at p. 1390; see also CEQA Guidelines § 15204(a).)

Applying this test, this Court cannot realistically establish a hardand-fast rule that an analysis correlating air pollution impacts of a project to quantified resulting health impacts is always required, or indeed that it is never required. Simply put, in some cases such an analysis will be "feasible"; in some cases it will not.

For example, air pollution control districts often require a proposed new source of toxic air contaminants to prepare a "health risk assessment" before issuing a permit to construct. District rules often limit the allowable cancer risk the new source may cause to the "maximally exposed individual" (worker and residence exposures). (See, e.g., SCAQMD Rule 1401(c)(8); 1401(d)(1), supra note 15.) In order to perform this analysis, it

is necessary to have data regarding the sources and types of air toxic contaminants, location of emission points, velocity of emissions, the meteorology and topography of the area, and the location of receptors (worker and residence). (SCAQMD, Supplemental Guidelines for Preparing Risk Assessments for the Air Toxics "Hot Spots" Information and Assessment Act (AB2588), pp. 11-16; (last visited Apr. 1, 2015) http://www.aqmd.gov/home/library/documents-support-material; "Guidelines" hyperlink; AB2588; then follow AB2588 Risk Assessment Guidelines hyperlink.)

Thus, it is feasible to determine the health risk posed by a new gas station locating at an intersection in a mixed use area, where receptor locations are known. On the other hand, it may not be feasible to perform a health risk assessment for airborne toxics that will be emitted by a generic industrial building that was built on "speculation" (i.e., without knowing the future tenant(s)). Even where a health risk assessment can be prepared, however, the resulting maximum health risk value is only a calculation of risk—it does not necessarily mean anyone will contract cancer as a result of the project.

In order to find the "cancer burden" or expected additional cases of cancer resulting from the project, it is also necessary to know the numbers and location of individuals living within the "zone of impact" of the project: i.e., those living in areas where the projected cancer risk from the project exceeds one in a million. (SCAQMD, Health Risk Assessment Summary form, http://www.aqmd.gov/home/forms; filter by "AB2588" category; then "Health Risk Assessment" hyperlink (last visited Apr. 1, 2015).) The affected population is divided into bands of those exposed to at least 1 in a million risk, those exposed to at least 10 in a million risk, etc. up to those exposed at the highest levels. (*Id.*) This data allows agencies to calculate an approximate number of additional cancer cases expected from

the project. However, it is not possible to predict which particular individuals will be affected.

For the so-called criteria pollutants⁵, such as ozone, it may be more difficult to quantify health impacts. Ozone is formed in the atmosphere from the chemical reaction of the nitrogen oxides (NO_x) and volatile organic compounds (VOC) in the presence of sunlight. (U.S. EPA, Ground Level Ozone, http://www.epa.gov/airquality/ozonepollution/ (last updated Mar. 25, 2015).) It takes time and the influence of meteorological conditions for these reactions to occur, so ozone may be formed at a distance downwind from the sources. (U.S. EPA, *Guideline on Ozone Monitoring Site Selection* (Aug. 1998) EPA-454/R-98-002 § 5.1.2, http://www.epa.gov/ttnamti1/archive/cpreldoc.html (last visited Apr. 1, 2015).) NO_x and VOC are known as "precursors" of ozone.

Scientifically, health effects from ozone are correlated with increases in the ambient level of ozone in the air a person breathes. (U.S. EPA, Health Effects of Ozone in the General Population, Figure 9, http://www.epa.gov/apti/ozonehealth/population.html#levels (last visited Apr. 1, 2015).) However, it takes a large amount of additional precursor emissions to cause a modeled increase in ambient ozone levels over an entire region. For example, the SCAQMD's 2012 AQMP showed that reducing NO_x by 432 tons per day (157,680 tons/year) and reducing VOC by 187 tons per day (68,255 tons/year) would reduce ozone levels at the SCAQMD's monitor site with the highest levels by only 9 parts per billion. (South Coast Air Quality Management District, Final 2012 AQMP (February 2013), http://www.aqmd.gov/home/library/clean-air-plans/air-quality-mgt-plan/final-2012-air-quality-management-plan; then follow "Appendix V: Modeling & Attainment Demonstrations" hyperlink,

⁵ See discussion of types of pollutants, supra, Part I.A.

pp. v-4-2, v-7-4, v-7-24.) SCAQMD staff does not currently know of a way to accurately quantify ozone-related health impacts caused by NO_x or VOC emissions from relatively small projects.

On the other hand, this type of analysis may be feasible for projects on a regional scale with very high emissions of NO_x and VOCs, where impacts are regional. For example, in 2011 the SCAQMD performed a health impact analysis in its CEQA document for proposed Rule 1315, which authorized various newly-permitted sources to use offsets from the districts "internal bank" of emission reductions. This CEQA analysis accounted for essentially all the increases in emissions due to new or modified sources in the District between 2010 and 2030.6 The SCAQMD was able to correlate this very large emissions increase (e.g., 6,620 pounds per day NO_x (1,208 tons per year), 89,180 pounds per day VOC (16,275 tons per year)) to expected health outcomes from ozone and particulate matter (e.g., 20 premature deaths per year and 89,947 school absences in the year 2030 due to ozone). (SCAQMD Governing Board Agenda, February 4, 2011, Agenda Item 26, Assessment for: Re-adoption of Proposed Rule 1315 – Federal New Source Review Tracking System (see hyperlink in fn 6) at p. 4.1-35, Table 4.1-29.)

⁶ (SCAQMD Governing Board Agenda, February 4, 2011, Agenda Item 26, Attachment G, Assessment for: Re-adoption of Proposed Rule 1315 – Federal New Source Review Tracking System, Vol. 1, p.4.0-6, http://www.aqmd.gov/home/library/meeting-agenda-february-4-2011; the follow "26. Adopt Proposed Rule 1315 – Federal New Source Review Tracking System" (last visited April 1, 2015).)

⁷ The SCAQMD was able to establish the location of future NO_x and VOC emissions by assuming that new projects would be built in the same locations and proportions as existing stationary sources. This CEQA document was upheld by the Los Angeles County Superior Court in *Natural Res. Def. Council v SCAQMD*, Los Angeles Superior Court No. BS110792).

However, a project emitting only 10 tons per year of NO_x or VOC is small enough that its regional impact on ambient ozone levels may not be detected in the regional air quality models that are currently used to determine ozone levels. Thus, in this case it would not be feasible to directly correlate project emissions of VOC or NO_x with specific health impacts from ozone. This is in part because ozone formation is not linearly related to emissions. Ozone impacts vary depending on the location of the emissions, the location of other precursor emissions, meteorology and seasonal impacts, and because ozone is formed some time later and downwind from the actual emission. (EPA Guideline on Ozone Monitoring Site Selection (Aug. 1998) EPA-454/R-98-002, § 5.1.2; https://www.epa.gov/ttnamti1/archive/cpreldoc.html; then search "Guideline on Ozone Monitoring Site Selection" click on pdf) (last viewed Apr. 1, 2015).)

SCAQMD has set its CEQA "significance" threshold for NO_x and VOC at 10 tons per year (expressed as 55 lb/day). (SCAQMD, *Air Quality Analysis Handbook*, http://www.aqmd.gov/home/regulations/ceqa/air-quality-analysis-handbook; then follow "SCAQMD Air Quality Significance Thresholds" hyperlink (last visited Apr. 1, 2015).) This is because the federal Clean Air Act defines a "major" stationary source for "extreme" ozone nonattainment areas such as SCAQMD as one emitting 10 tons/year. (42 U.S.C. §§ 7511a(e), 7511a(f); CAA §§ 182(e), 182(f).) Under the Clean Air Act, such sources are subject to enhanced control requirements (42 U.S.C. §§ 7502(c)(5), 7503; CAA §§ 172(c)(5), 173), so SCAQMD decided this was an appropriate threshold for making a CEQA "significance" finding and requiring feasible mitigation. Essentially, SCAQMD takes the position that a source that emits 10 tons/year of NO_x or VOC would contribute cumulatively to ozone formation. Therefore, lead agencies that use SCAQMD's thresholds of significance may determine

that many projects have "significant" air quality impacts and must apply all feasible mitigation measures, yet will not be able to precisely correlate the project to quantifiable health impacts, unless the emissions are sufficiently high to use a regional modeling program.

In the case of particulate matter $(PM_{2.5})^8$, another "criteria" pollutant, SCAQMD staff is aware of two possible methods of analysis. SCAQMD used regional modeling to predict expected health impacts from its proposed Rule 1315, as mentioned above. Also, the California Air Resources Board (CARB) has developed a methodology that can predict expected mortality (premature deaths) from large amounts of PM_{2.5} (California Air Resources Board, Health Impacts Analysis: PM Premature Death Relationship, http://www.arb.ca.gov/research/health/pm-mort/pmmort arch.htm (last reviewed Jan. 19, 2012).) SCAQMD used the CARB methodology to predict impacts from three very large power plants (e.g., 731-1837 lbs/day). (Final Environmental Assessment for Rule 1315, supra, pp 4.0-12, 4.1-13, 4.1-37 (e.g., 125 premature deaths in the entire SCAQMD in 2030), 4.1-39 (0.05 to 1.77 annual premature deaths from power plants.) Again, this project involved large amounts of additional PM_{2.5} in the District, up to 2.82 tons/day (5,650 lbs/day of PM_{2.5}, or, or 1029 tons/year. (*Id.* at table 4.1-4, p. 4.1-10.)

However, the primary author of the CARB methodology has reported that this PM_{2.5} health impact methodology is not suited for small projects and may yield unreliable results due to various uncertainties. ⁹ (SCAQMD, *Final Subsequent Mitigated Negative Declaration for:Warren*

⁸ SCAQMD has not attained the latest annual or 24-hour national ambient air quality standards for "PM_{2.5}" or particulate matter less than 2.5 microns in diameter.

⁹ Among these uncertainties are the representativeness of the population used in the methodology, and the specific source of PM and the corresponding health impacts. (*Id.* at p. 2-24.)

E&P, Inc. WTU Central Facility, New Equipment Project (certified July 19, 2011), http://www.aqmd.gov/home/library/documents---year-2011; then follow "Final Subsequent Mitigated Negative Declaration for Warren E&P Inc. WTU Central Facility, New Equipment Project" hyperlink, pp. 2-22, 2-23 (last visited Apr. 1, 2015).) Therefore, when SCAQMD prepared a CEQA document for the expansion of an existing oil production facility, with very small PM_{2.5} increases (3.8 lb/day) and a very small affected population, staff elected not to use the CARB methodology for using estimated PM_{2.5} emissions to derive a projected premature mortality number and explained why it would be inappropriate to do so. (Id. at pp 2-22 to 2-24.) SCAQMD staff concluded that use of this methodology for such a small source could result in unreliable findings and would not provide meaningful information. (Id. at pp. 2-23, 2-25.) This CEQA document was not challenged in court.

In the above case, while it may have been technically possible to plug the data into the methodology, the results would not have been reliable or meaningful. SCAQMD believes that an agency should not be required to perform analyses that do not produce reliable or meaningful results. This Court has already held that an agency may decline to use even the "normal" "existing conditions" CEQA baseline where to do so would be misleading or without informational value. (*Neighbors for Smart Rail v. Exposition Metro Line* (2013) 57 Cal.4th 439, 448, 457.) The same should be true for a decision that a particular study or analysis would not provide reliable or meaningful results.¹⁰

¹⁰ Whether a particular study would result in "informational value" is a part of deciding whether it is "feasible." CEQA defines "feasible" as "capable of being accomplished in a successful manner within a reasonable period of time, taking into account economic, environmental, social, and

Therefore, it is not possible to set a hard-and-fast rule on whether a correlation of air quality impacts with specific quantifiable health impacts is required in all cases. Instead, the result turns on whether such an analysis is reasonably feasible in the particular case. Moreover, what is reasonably feasible may change over time as scientists and regulatory agencies continually seek to improve their ability to predict health impacts. For example, CARB staff has been directed by its Governing Board to reassess and improve the methodology for estimating premature deaths. (California Air Resources Board, *Health Impacts Analysis: PM Mortality Relationship*, http://www.arb.ca.gov/research/health/pm-mort/pm-mort.htm (last reviewed Dec. 29, 2010).) This factor also counsels against setting any hard-and-fast rule in this case.

III. THE QUESTION OF WHETHER AN EIR CONTAINS SUFFICIENT ANALYSIS TO MEET CEQA'S REQUIREMENTS IS A MIXED QUESTION OF FACT AND LAW GOVERNED BY TWO DIFFERENT STANDARDS OF REVIEW.

A. Standard of Review for Feasibility Determination and Sufficiency as an Informative Document

A second issue in this case is whether courts should review an EIR's informational sufficiency under the "substantial evidence" test as argued by Friant Ranch or the "independent judgment" test as argued by Sierra Club.

technological factors." (Pub. Resources Code § 21061.1.) A study cannot be "accomplished in a *successful* manner" if it produces unreliable or misleading results.

In this case, the lead agency did not have an opportunity to determine whether the requested analysis was feasible because the comment was non-specific. Therefore, SCAQMD suggests that this Court, after resolving the legal issues in the case, direct the Court of Appeal to remand the case to the lead agency for a determination of whether the requested analysis is feasible. Because Fresno County, the lead agency, did not seek review in this Court, it seems likely that the County has concluded that at least some level of correlation of air pollution with health impacts is feasible.

As this Court has explained, "a reviewing court must adjust its scrutiny to the nature of the alleged defect, depending on whether the claim is predominantly one of improper procedure or a dispute over the facts."

(Vineyard Area Citizens v. City of Rancho Cordova, supra, 40 Cal.4th at 435.) For questions regarding compliance with proper procedure or other legal questions, courts review an agency's action de novo under the "independent judgment" test. (Id.) On the other hand, courts review factual disputes only for substantial evidence, thereby "accord[ing] greater deference to the agency's substantive factual conclusions." (Id.)

Here, Friant Ranch and Sierra Club agree that the case involves the question of whether an EIR includes sufficient information regarding a project's impacts. However, they disagree on the proper standard of review for answering this question: Sierra Club contends that courts use the independent judgment standard to determine whether an EIR's analysis is sufficient to meet CEQA's informational purposes, ¹² while Friant Ranch contends that the substantial evidence standard applies to this question.

///

///

///

///

///

///

///

///

///

¹² Sierra Club acknowledges that courts use the substantial evidence standard when reviewing predicate factual issues, but argues that courts ultimately decide as a matter of law what CEQA requires. (Answering Brief, pp. 14, 23.)

SCAQMD submits that the issue is more nuanced than either party contends. We submit that, whether a CEQA document includes sufficient analysis to satisfy CEQA's informational mandates is a mixed question of fact and law, 13 containing two levels of inquiry that should be judged by different standards. 14

The state CEQA Guidelines set forth standards for the adequacy of environmental analysis. Guidelines Section 15151 states:

An EIR should be prepared with a sufficient degree of analysis to provide decision makers with information which enables them to make a decision which intelligently takes account of environmental consequences. An evaluation of the environmental effects of a proposed project need not be exhaustive, but the sufficiency of an EIR is to be reviewed in light of what is reasonably feasible. Disagreement among experts does not make an EIR inadequate, but the EIR should summarize the main points of disagreement among the experts. The courts have looked not for perfection, but for adequacy, completeness, and a good-faith effort at full disclosure.

In this case, the basic question is whether the underlying analysis of air quality impacts made the EIR "sufficient" as an informative document. However, whether the EIR's analysis was sufficient is judged in light of what was reasonably feasible. This represents a mixed question of fact and law that is governed by two different standards of review.

¹³ Friant Ranch actually states that the claim that an EIR lacks sufficient relevant information is, "most properly thought of as raising mixed questions of fact and law." (Opening Brief, p. 27.) However, the remainder of its argument claims that the court should apply the substantial evidence standard of review to all aspects of the issue.

¹⁴ Mixed questions of fact and law issues may implicate predominantly factual subordinate questions that are reviewed under the substantial evidence test even though the ultimate question may be reviewed by the independent judgment test. *Crocker National Bank v. City and County of San Francisco* (1989) 49 Cal.3d 881, 888-889.

SCAQMD submits that an EIR's sufficiency as an informational document is ultimately a legal question that courts should determine using their independent judgment. This Court's language in Laurel Heights I supports this position. As this Court explained: "The court does not pass upon the correctness of the EIR's environmental conclusions, but only upon its sufficiency as an informative document." (Laurel Heights I, supra, 47 Cal.3d at 392-393) (emphasis added.) As described above, the Court in Vineyard Area Citizens v. City of Rancho Cordova, supra, 40 Cal.4th at 431, also used its independent judgment to determine what level of analysis CEQA requires for water supply impacts. The Court did not defer to the lead agency's opinion regarding the law's requirements; rather, it determined for itself what level of analysis was necessary to meet "[t]he law's informational demands." (Id. at p. 432.) Further, existing case law also holds that where an agency fails to comply with CEQA's information disclosure requirements, the agency has "failed to proceed in the manner required by law." (Save Our Peninsula Comm. v. Monterey County Bd. of Supervisors (2001) 87 Cal. App. 4th 99, 118.)

However, whether an EIR satisfies CEQA's requirements depends in part on whether it was reasonably feasible for an agency to conduct additional or more thorough analysis. EIRs must contain "a detailed statement" of a project's impacts (Pub. Res. Code § 21061), and an agency must "use its best efforts to find out and disclose all that it reasonably can." (CEQA Guidelines § 15144.) Nevertheless, "the sufficiency of an EIR is to be reviewed in light of what is reasonably feasible." (CEQA Guidelines § 15151.)

SCAQMD submits that the question of whether additional analysis or a particular study suggested by a commenter is "feasible" is generally a question of fact. Courts have already held that whether a particular alternative is "feasible" is reviewed by the substantial evidence test.

(Uphold Our Heritage v. Town of Woodside (2007) 147 Cal. App. 4th 587, 598-99; Center for Biological Diversity v. County of San Bernardino (2010) 185 Cal. App. 4th 866, 883.) Thus, if a lead agency determines that a particular study or analysis is infeasible, that decision should generally be judged by the substantial evidence standard. However, SCAQMD urges this Court to hold that lead agencies must explain the basis of any determination that a particular analysis is infeasible in the EIR itself. An EIR must discuss information, including issues related to the feasibility of particular analyses "in sufficient detail to enable meaningful participation and criticism by the public. '[W]hatever is required to be considered in an EIR must be in that formal report; what any official might have known from other writings or oral presentations cannot supply what is lacking in the report." (Laurel Heights I, supra, 47 Cal.3d at p. 405 (quoting Santiago County Water District v. County of Orange (1981) 118 Cal.App.3d 818, 831) (discussing analysis of alternatives).) The evidence on which the determination is based should also be summarized in the EIR itself, with appropriate citations to reference materials if necessary. Otherwise commenting agencies such as SCAQMD would be forced to guess where the lead agency's evidence might be located, thus thwarting effective public participation.

Moreover, if a lead agency determines that a particular study or analysis would not result in reliable or useful information and for that reason is not feasible, that determination should be judged by the substantial evidence test. (See *Neighbors for Smart Rail v. Exposition Metro Line Construction Authority, supra*, 57 Cal.4th 439, 448, 457:

whether "existing conditions" baseline would be misleading or uninformative judged by substantial evidence standard. ¹⁵)

If the lead agency's determination that a particular analysis or study is not feasible is supported by substantial evidence, then the agency has not violated CEQA's information disclosure provisions, since it would be infeasible to provide additional information. This Court's decisions provide precedent for such a result. For example, this Court determined that the issue of whether the EIR should have included a more detailed discussion of future herbicide use was resolved because substantial evidence supported the agency's finding that "the precise parameters of future herbicide use could not be predicted." *Ebbetts Pass Forest Watch v. California Dept. of Forestry & Fire Protection* (2008) 43 Cal.4th 936, 955.

Of course, SCAQMD expects that courts will continue to hold lead agencies to their obligations to consult with, and not to ignore or misrepresent, the views of sister agencies having special expertise in the area of air quality. (*Berkeley Keep Jets Over the Bay v. Board of Port Commissioners* (2007) 91 Cal.App.4th 1344, 1364 n.11.) In some cases, information provided by such expert agencies may establish that the purported evidence relied on by the lead agency is not in fact "substantial". (*Id.* at pp. 1369-1371.)

In sum, courts retain ultimate responsibility to determine what CEQA requires. However, the law does not require exhaustive analysis, but only what is reasonably feasible. Agencies deserve deference for their factual determinations regarding what type of analysis is reasonably feasible. On the other hand, if a commenter requests more information, and the lead agency declines to provide it but does *not* determine that the

¹⁵ The substantial evidence standard recognizes that the courts "have neither the resources nor the scientific expertise" to weigh conflicting evidence on technical issues. (*Laurel Heights I, supra,* 47 Cal.3d 376, 393.)

requested study or analysis would be infeasible, misleading or uninformative, the question becomes whether the omission of that analysis renders the EIR inadequate to satisfy CEQA's informational purposes. (*Id.* at pp. 1370-71.) Again, this is predominantly a question of law and should be judged by the de novo or independent judgment standard of review. Of course, this Court has recognized that a "project opponent or reviewing court can always imagine some additional study or analysis that might provide helpful information. It is not for them to design the EIR. That further study...might be helpful does not make it necessary." (*Laurel Heights I, supra, 47* Cal.3d 376, 415 – see also CEQA Guidelines § 15204(a) [CEQA "does not require a lead agency to conduct every test. . . recommended or demanded by commenters."].) Courts, then, must adjudicate whether an omission of particular information renders an EIR inadequate to serve CEQA's informational purposes. ¹⁶

¹⁶ We recognize that there is case law stating that the substantial evidence standard applies to "challenges to the scope of an EIR's analysis of a topic" as well as the methodology used and the accuracy of the data relied on in the document "because these types of challenges involve factual questions." (Bakersfield Citizens for Local Control v. City of Bakersfield, supra. 124 Cal.App.4th 1184, 1198, and cases relied on therein.) However, we interpret this language to refer to situations where the question of the scope of the analysis really is factual—that is, where it involves whether further analysis is feasible, as discussed above. This interpretation is supported by the fact that the Bakersfield court expressly rejected an argument that a claimed "omission of information from the EIR should be treated as inquiries whether there is substantial evidence supporting the decision approving the project." Bakersfield, supra, 124 Cal. App. 4th at p. 1208. And the Bakersfield court ultimately decided that the lead agency must analyze the connection between the identified air pollution impacts and resulting health impacts, even though the EIR already included some discussion of air-pollution-related respiratory illnesses. Bakersfield, supra, 124 Cal.App.4th at p. 1220. Therefore, the court must not have interpreted this question as one of the "scope of the analysis" to be judged by the substantial evidence standard.

B. Friant Ranch's Rationale for Rejecting the Independent Judgment Standard of Review is Unsupported by Case Law.

In its brief, Friant Ranch makes a distinction between cases where a required CEQA topic is not discussed at all (to be reviewed by independent judgment as a failure to proceed in the manner required by law) and cases where a topic is discussed, but the commenter claims the information provided is insufficient (to be judged by the substantial evidence test). (Opening Brief, pp. 13-17.) The Court of Appeal recognized these two types of cases, but concluded that both raised questions of law. (Sierra Club v. County of Fresno (2014) 226 Cal.App.4th 704 (superseded by grant of review) 172 Cal.Rptr.3d 271, 290.) We believe the distinction drawn by Friant Ranch is unduly narrow, and inconsistent with cases which have concluded that CEQA documents are insufficient. In many instances, CEQA's requirements are stated broadly, and the courts must interpret the law to determine what level of analysis satisfies CEQA's mandate for providing meaningful information, even though the EIR discusses the issue to some extent.

For example, the CEQA Guidelines require discussion of the existing environmental baseline. In *County of Amador v. El Dorado County Water Agency* (1999) 76 Cal.App.4th 931, 954-955, the lead agency had discussed the environmental baseline by describing historic month-end water levels in the affected lakes. However, the court held that this was not an adequate baseline discussion because it failed to discuss the timing and amounts of past actual water releases, to allow comparison with the proposed project. The court evidently applied the independent judgment test to its decision, even though the agency discussed the issue to some extent.

Likewise, in *Vineyard Area Citizens* (2007) 40 Cal.4th 412, this Court addressed the question of whether an EIR's analysis of water supply impacts complied with CEQA. The parties agreed that the EIR was required to analyze the effects of providing water to the development project, "and that in order to do so the EIR had, in some manner, to identify the planned sources of that water." (*Vineyard Area Citizens, supra*, at p. 428.) However, the parties disagreed as to the level of detail required for this analysis and "what level of uncertainty regarding the availability of water supplies can be tolerated in an EIR" (*Id.*) In other words, the EIR had analyzed water supply impacts for the project, but the petitioner claimed that the analysis was insufficient.

This Court noted that neither CEQA's statutory language or the CEQA Guidelines specifically addressed the question of how precisely an EIR must discuss water supply impacts. (Id.) However, it explained that CEQA "states that '[w]hile foreseeing the unforeseeable is not possible, an agency must use its best efforts to find out and disclose all that it reasonably can." (Id., [Guidelines § 15144].) The Court used this general principle, along with prior precedent, to elucidate four "principles for analytical adequacy" that are necessary in order to satisfy "CEQA's informational purposes." (Vineyard Area Citizens, supra, at p. 430.) The Court did not defer to the agency's determination that the EIR's analysis of water supply impacts was sufficient. Rather, this Court used its independent judgment to determine for itself the level of analysis required to satisfy CEQA's fundamental purposes. (Vineyard Area Citizens, supra, at p. 441: an EIR does not serve its purposes where it neglects to explain likely sources of water and "... leaves long term water supply considerations to later stages of the project.")

Similarly, the CEQA Guidelines require an analysis of noise impacts of the project. (Appendix G, "Environmental Checklist Form." In *Gray v. County of Madera* (2008) 167 Cal.App.4th 1099, 1123, the court held that the lead agency's noise impact analysis was inadequate even though it had addressed the issue and concluded that the increase would not be noticeable. If the court had been using the substantial evidence standard, it likely would have upheld this discussion.

Therefore, we do not agree that the issue can be resolved on the basis suggested by Friant Ranch, which would apply the substantial evidence standard to *every* challenge to an analysis that addresses a required CEQA topic. This interpretation would subvert the courts' proper role in interpreting CEQA and determining what the law requires.

Nor do we agree that the Court of Appeal in this case violated CEQA's prohibition on courts interpreting its provisions "in a manner which imposes procedural or substantive requirements beyond those explicitly stated in this division or in the state guidelines." (Pub. Resources Code § 21083.1.) CEQA requires an EIR to describe *all* significant impacts of the project on the environment. (Pub. Resources Code § 21100(b)(2); *Vineyard Area Citizens, supra,* at p. 428.) Human beings are part of the environment, so CEQA requires EIRs to discuss a project's significant impacts on human health. However, except in certain particular circumstances, ¹⁸ neither the CEQA statute nor Guidelines specify the precise level of analysis that agencies must undertake to satisfy the law's requirements. (see, e.g., CEQA Guidelines § 15126.2(a) [EIRs must describe "health and safety problems caused by {a project's} physical changes"].) Accordingly, courts must interpret CEQA as a whole to

¹⁷ Association of Environmental Professionals, 2015 CEQA Statute and Guidelines (2015) p.287.

¹⁸ E.g., Pub. Resources Code § 21151.8(C)(3)(B)(iii) (requiring specific type of health risk analysis for siting schools).

determine whether a particular EIR is sufficient as an informational document. A court determining whether an EIR's discussion of human health impacts is legally sufficient does not constitute imposing a new substantive requirement. Under Friant Ranch's theory, the above-referenced cases holding a CEQA analysis inadequate would have violated the law. This is not a reasonable interpretation.

IV. COURTS MUST SCRUPULOUSLY ENFORCE THE REQUIREMENTS THAT LEAD AGENCIES CONSULT WITH AND OBTAIN COMMENTS FROM AIR DISTRICTS

Courts must "scrupulously enforce" CEQA's legislatively mandated requirements. (*Vineyard Area Citizens, supra*, 40 Cal.4th 412, 435.) Case law has firmly established that lead agencies must consult with the relevant air pollution control district before conducting an initial study, and must provide the districts with notice of the intention to adopt a negative declaration (or EIR). (*Schenck v. County of Sonoma* (2011) 198 Cal.App.4th 949, 958.) As *Schenck* held, neither publishing the notice nor providing it to the State Clearinghouse was a sufficient substitute for sending notice directly to the air district. (*Id.*) Rather, courts "must be satisfied that [administrative] agencies have fully complied with the procedural requirements of CEQA, since only in this way can the important public purposes of CEQA be protected from subversion." *Schenck*, 198 Cal.App.4th at p. 959 (citations omitted).²⁰

¹⁹ We submit that Public Resources Code Section 21083.1 was intended to prevent courts from, for example, holding that an agency must analyze economic impacts of a project where there are no resulting environmental impacts (see CEQA Guidelines § 15131), or imposing new procedural requirements, such as imposing additional public notice requirements not set forth in CEQA or the Guidelines.

²⁰ Lead agencies must consult air districts, as public agencies with jurisdiction by law over resources affected by the project, *before* releasing an EIR. (Pub. Resources Code §§ 21104(a); 21153.) Moreover, air

Lead agencies should be aware, therefore, that failure to properly seek and consider input from the relevant air district constitutes legal error which may jeopardize their project approvals. For example, the court in *Fall River Wild Trout Foundation v. County of Shasta*, (1999) 70 Cal.App.4th 482, 492 held that the failure to give notice to a trustee agency (Department of Fish and Game) was prejudicial error requiring reversal. The court explained that the lack of notice prevented the Department from providing any response to the CEQA document. (*Id.* at p. 492.) It therefore prevented relevant information from being presented to the lead agency, which was prejudicial error because it precluded informed decision-making. (*Id.*)²¹

districts should be considered "state agencies" for purposes of the requirement to consult with "trustee agencies" as set forth in Public Resources Code § 20180.3(a). This Court has long ago held that the districts are not mere "local agencies" whose regulations are superseded by those of a state agency regarding matters of statewide concern, but rather have concurrent jurisdiction over such issues. (Orange County Air Pollution Control District v. Public Util. Com. (1971) 4 Cal.3d 945, 951, 954.) Since air pollution is a matter of statewide concern, *Id* at 952, air districts should be entitled to trustee agency status in order to ensure that this vital concern is adequately protected during the CEOA process. ²¹ In Schenck, the court concluded that failure to give notice to the air district was not prejudicial, but this was partly because the trial court had already corrected the error before the case arrived at the Court of Appeal. The trial court issued a writ of mandate requiring the lead agency to give notice to the air district. The air district responded by concurring with the lead agency that air impacts were not significant. (Schenck, 198 Cal. App. 4th 949, 960.) We disagree with the Schenck court that the failure to give notice to the air district would not have been prejudicial (even in the absence of the trial court writ) merely because the lead agency purported to follow the air district's published CEQA guidelines for significance. (Id., 198 Cal.App.4th at p. 960.) In the first place, absent notice to the air district, it is uncertain whether the lead agency properly followed those guidelines. Moreover, it is not realistic to expect that an air district's published guidelines would necessarily fully address all possible air-quality related issues that can arise with a CEQA project, or that those

Similarly, lead agencies must obtain additional information requested by expert agencies, including those with jurisdiction by law, if that information is necessary to determine a project's impacts. (Sierra Club v. State Bd. Of Forestry (1994) 7 Cal.4th 1215, 1236-37.) Approving a project without obtaining that information constitutes a failure to proceed in the manner prescribed by CEQA. (Id. at p. 1236.)

Moreover, a lead agency can save significant time and money by consulting with the air district early in the process. For example, the lead agency can learn what the air district recommends as an appropriate analysis on the facts of its case, including what kinds of health impacts analysis may be available, and what models are appropriate for use. This saves the lead agency from the need to do its analysis all over again and possibly needing to recirculate the document after errors are corrected, if new significant impacts are identified. (CEQA Guidelines § 15088.5(a).) At the same time, the air district's expert input can help the lead agency properly determine whether another commenter's request for additional analysis or studies is reasonable or feasible. Finally, the air district can provide input on what mitigation measures would be feasible and effective.

Therefore, we suggest that this Court provide guidance to lead agencies reminding them of the importance of consulting with the relevant air districts regarding these issues. Otherwise, their feasibility decisions may be vulnerable to air district evidence that establishes that there is no substantial evidence to support the lead agency decision not to provide specific analysis. (*See Berkeley Keep Jets Over the Bay, supra*, 91 Cal.App.4th 1344, 1369-1371.)

guidelines would necessarily be continually modified to reflect new developments. Therefore we believe that, had the trial court not already ordered the lead agency to obtain the air district's views, the failure to give notice would have been prejudicial, as in *Fall River*, *supra*, 70 Cal.App.4th 482, 492.

CONCLUSION

The SCAQMD respectfully requests this Court *not* to establish a hard-and-fast rule concerning whether CEQA requires a lead agency to correlate identified air quality impacts of a project with resulting health outcomes. Moreover, the question of whether an EIR is "sufficient as an informational document" is a mixed question of fact and law containing two levels of inquiry. Whether a particular proposed analysis is feasible is predominantly a question of fact to be judged by the substantial evidence standard of review. Where the requested analysis is feasible, but the lead agency relies on legal or policy reasons not to provide it, the question of whether the EIR is nevertheless sufficient as an informational document is predominantly a question of law to be judged by the independent judgment standard of review.

Respectfully submitted,

DATED: April 3, 2015

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT KURT R. WIESE, GENERAL COUNSEL BARBARA BAIRD, CHIEF DEPUTY COUNSEL

Ву: 🔟

Barbara Baird

Attorneys for Amicus Curiae

SOUTH COAST AIR QUALITY MANAGEMENT DISTICT

CERTIFICATE OF WORD COUNT

Pursuant to Rule 8.520(c)(1) of the California Rules of Court, I hereby certify that this brief contains 8,476 words, including footnotes, but excluding the Application, Table of Contents, Table of Authorities, Certificate of Service, this Certificate of Word Count, and signature blocks. I have relied on the word count of the Microsoft Word Vista program used to prepare this Certificate.

DATED: April 3, 2015

Respectfully submitted,

1 Burbara Brind Barbara Baird

PROOF OF SERVICE

I am employed in the County of Los Angeles, California. I am over the age of 18 years and not a party to the within action. My business address is 21865 Copley Drive, Diamond Bar, California 91765.

On April 3, 2015 I served true copies of the following document(s) described as APPLICATION OF THE SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT FOR LEAVE TO FILE BRIEF OF AMICUS CURIAE IN SUPPORT OF NEITHER PARTY AND [PROPOSED] BRIEF OF AMICUS CURIAE by placing a true copy of the foregoing document(s) in a sealed envelope addressed as set forth on the attached service list as follows:

BY MAIL: I enclosed the document(s) in a sealed envelope or package addressed to the persons at the addresses listed in the Service List and placed the envelope for collection and mailing following our ordinary business practices. I am readily familiar with this District's practice for collection and processing of correspondence for mailing. Under that practice, the correspondence would be deposited with the United States Postal Service, with postage thereon fully prepaid at Diamond Bar, California, in the ordinary course of business. I am aware that on motion of the party served, service is presumed invalid if postal cancellation date or postage meter date is more than one day after date of deposit for mailing in affidavit.

I declare under penalty of perjury under the laws of the State of California that the foregoing is true and correct.

Executed on April 3, 2015 at Diamond Bar, California.

Patricia Andersor

SERVICE LIST

James G. Moose, Tiffany K. Wright, Laura M. Harris REMY MOOSE MANLEY, LLP 555 Capitol Mall, Suite 800 Sacramento, CA 95814 Attorneys for Real Party in Interest and Respondent *Friant Ranch*, *L.P.*

Bryan N. Wagner WAGNER & WAGNER 7110 N. Fresno St, Suite 340 Fresno, CA 93720 Attorney for Real Party in Interest and Respondent *Friant Ranch*, *L.P.*

Sara Hedgpeth-Harris LAW OFFICE OF SARA HEDGPETH-HARRIS 5445 E. Lane Avenue Fresno, CA 93727 Attorney for Plaintiffs and Appellants Sierra Club, et al

Daniel C. Cederborg
Bruce B. Johnson, Jr.
Zachary Stephen Redmond
OFFICE OF THE FRESNO COUNTY
COUNSEL
2220 Tulare Street, Suite 500
Fresno, CA 93721

Attorneys for Respondents County of Fresno

Clerk of the Court
California Court of Appeal
Fifth Appellate District
2424 Ventura Street
Fresno, CA 93721
(via U.S. Mail & Electronic Transmission)

Clerk of the Court Superior Court of California County of Fresno 1130 O Street Fresno, CA 93721 This page intentionally left blank

